power shrink

The Modular Shrink Unit for your Production







More Speed, Safer Processes, Greater Flexibility —

»powerShrink«

How do you shrink-clamp and unclamp in record time? By using »powerShrink«. This inductive shrinking device for HSS and hard metal tools shortens setup times for your production processes. In less than 10 seconds, your tool will be heat-shrunken, cooled off in another 40 seconds, and then ready for production. Benefit from the high degree of rotation accuracy, long service life and reduced tool expenses.



Speed


- Shrink-clamping/Unclamping time:approx. 6 10 seconds(dependent on tool diameter)
- _ Cooling time: approx. 40 seconds (dependent on tool diameter)
- _ Time saving heating process


Safety

- _ High rotation accuracy, long service life
- Reliable process transfer of shrinking parameters from the presetter to the »powerShrink«

Flexibility

- All HM/HSS tools can be heat-shrunk
- _ Also suitable for tools with long shafts since the entire heating area is heated
- _ Modular design for individual adjustments, as needed

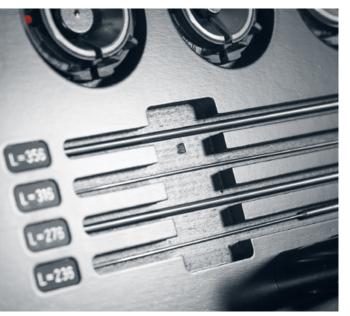







»powerShrink Basic« - the Standard shrinking device

- _ For all HM and HSS tools with a diameter of 3 32 mm
- With standard coils V2008 and interchangeable stop discs
- _ Single-location version
- _ Without integrated contact cooling



»powerShrink Economic« - the Entry-level Device

- _ For all HM and HSS tools with a diameter of 3 32 mm
- _ With standard coils V2008 and interchangeable stop discs
- _ Single-location version
- _ Also available with an adjustable coil



»powerShrink Economic Plus« - with Cooling

- _ For all HM and HSS tools with a diameter of 3 32 mm
- With standard coils V2008 and interchangeable stop discs
- _ Integrated contact cooling
- _ Single-location version
- _ Also available with an adjustable coil




»powerShrink Comfort« - with Cooling and Rotary Table

- _ For all HM and HSS tools with a diameter of 3 32 mm
- With standard coils V2008 and interchangeable stop discs
- _ Integrated contact cooling
- _ Rotary table with 3 stations
- _ Also available with an adjustable coil



»powerShrink Profi Plus« – the Professional Device with Cooling, Rotary Table and Integrated Coils

- _ For all HM and HSS tools with a diameter of 3 50 mm
- _ Adjustable coils 13kVA Ø 3 32 mm
- _ Integrated contact cooling
- _ Rotary tables with 3 stations
- _ With second rotary table for diameters of 40 50 mm and an output of 20 kVAm (Option)

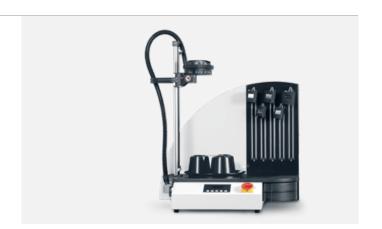

»powerShrink Nano« Specially Designed for Small Tools

- Featuring a horizontal design for easy use with small tools
- _ Ideal for shrink fit chuck with thin dimensions with a diameter of 3-16 mm, hard metal and HSS
- _ Specially designed for the small interfaces HSK 25 – HSK 63 and SK/BT 30/40
- _ Modular set-up and design for maximum flexibility



	10 kVA Inductor with D3 – 32 mm Limit Discs	13 kVA Inductor with D3 – 16 mm Limit Discs	13 kVA Inductor with D3 – 32 mm Limit Discs	13 kVA Adjustable D3 – 32 mm Inductor	20 kVA Inductor with D40 – 50 mm Limit Disc	Rotary Plate	Water Cooler, Cooling Bell Quantity	Flue Gas Suction Device	Design Trolley
»powerShrink Basic« 10 kVA	•							Option	Option
»powerShrink Economic« 13 kVA			•					Option	Option
»powerShrink Economic« 13 kVA / NG				•				Option	Option
»powerShrink Economic Plus« 13 kVA			•				•	Option	Option
»powerShrink Economic Plus« 13 kVA / NG				•			•	Option	Option
»powerShrink Comfort« 13 kVA			•			•	•	Option	Option
»powerShrink Comfort« 13 kVA / NG				•		•	•	Option	Option
»powerShrink Profi Plus« 20 kVA / NG				D3 – 32 and D40 – 50 or D40 – 50		•	•		Option
»powerShrink Nano« 13 kVA		•							Option

Coils

Standard Coils V2008

Proven quality with interchangeable stop discs for heating all shrink fit chucks with a diameter of 3 to 32 mm. Five stop discs suffice for adjusting the coils to the respective feed dimension.



New Generation Coils


Flexible and practical. With just a single rotation, the length and diameter of the coil can be set to the dimensions of the shrink fit chuck.



Flue Gas Suction Device

Directly channels toxic gases into a filtration unit during shrinking process. This ensures safety for the operator without any additional effort.



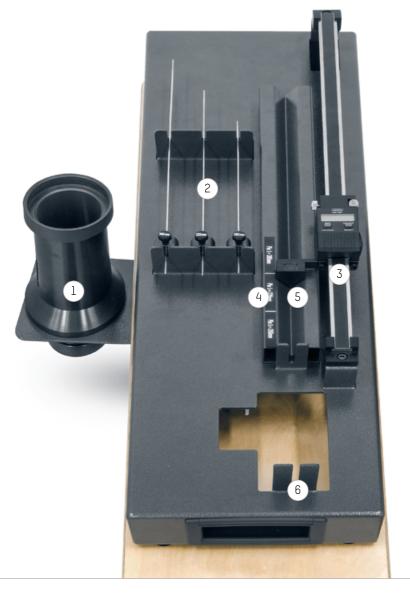

ZOLLER-»toolSet«

The optimal supplement for "powerShrink". "toolSet" allows you to heat shrink your tools quickly, easily and precisely in accordance with the nominal length.

- 1 | Acquisition unit
- 2 | Setting pins
- 3 | Measuring system
- 4 | Pin selection scale
- 5 | Insertion prism
- 6 | Setting pin for stop surface

Set for Easy Length Presetting

- _ Quick and easy presetting of the tool projection lengths
- _ Max. projection length: 150 mm
- _ Precision: ±0.05 mm
- Suitable for all shrink fit chuck and devices (flame, hot air, contact, induction)
- _ Space saving
- _ Excellent price-performance ratio
- _ Upgradeable at any time
- _ Scope of delivery with 3 clamp screws (Ø 3-12, Ø 12-20, Ø 16-25 mm) Optional: Ø 25-32 mm






Clamp screws


The Right Program for Safe Shrink-clamping and Unclamping

With the 293 heat shrinking program from the »pilot« software, you can transfer heat shrinking parameters for tools from any ZOLLER presetting and measuring machine to the »powerShrink«.

This guarantees the error-free shrink-clamping and unclamping of standard tools that can be performed by any operator.

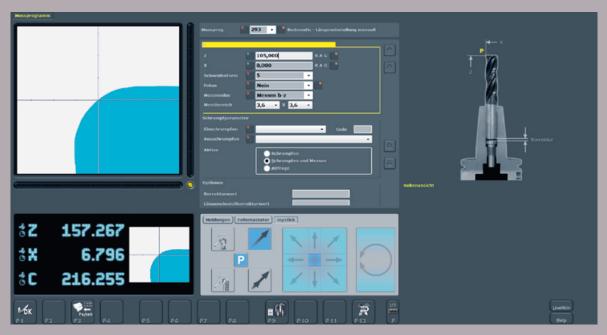

Input dialog for the 293 heat shrinking program in »pilot«.

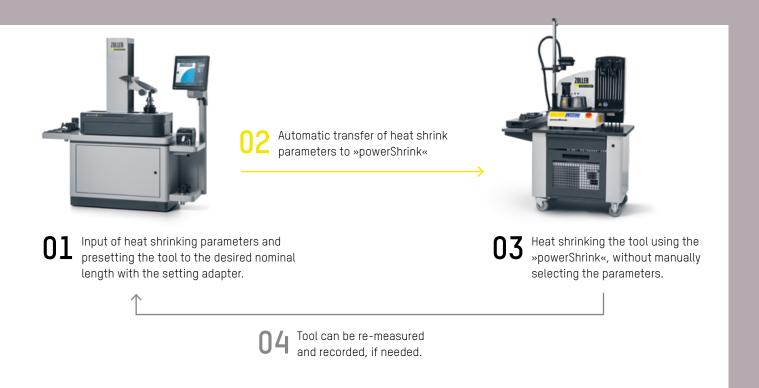

Optionen



System Trolleys for a Well-organized Workplace

- Trolleys for heat shrinking machines and accessories
- _ Ergonomic working height
- _ Optional: Drawer insert for storing accessories



Shrink-clamping Device

- Unclamping assistance for broken milling toolsSet with 1 basic holder
- and 6 ejectors (3 diameters in 2 lengths), without pliers



TME Intelligent Cooling System with Temperature Monitoring

- _ Measure feed temperature using sensors in the cooling elements
- _ Temperature display using a red or a green light
- _ Minimizing risk of injury
- _ Patented temperature monitoring



Cooling Adapter and Cooling Adapter Couplings

- _ Cooling adapter for all types of shrink fit chuck
- _ Cooling element with Ø 14–16 mm and Ø 25–32 mm with lateral lock

Technical Data

Power [kW]	Connection	Max. Length of Shrink Fit Chuck [mm]	Dimensions [mm]	Weight [kg]	Tool Diameter [mm]
10	3 x 400–480 volt, 16 ampere, 10 kVA	350	600 x 900 x 600	45	3 – 32
13	3 x 400–480 volt, 16 ampere, 13 kVA	510/570*	860 x 970 x 500	50	3 – 32
13	3 x 400–480 volt, 16 ampere, 13 kVA	510/570*	860 x 970 x 650	70	3 – 32
13	3 x 400–480 volt, 16 ampere, 13 kVA	510/570*	860 x 970 x 650	70	3 – 32
20	3 x 360-500 volt, 32 ampere, 20 kVA	550	860 x 970 x 650	85	3 – 50
13	3 x 400–480 volt, 16 ampere, 13 kVA	230	750 x 620 x 650	75	3 – 16
	10 13 13 13 20	10 3 x 400-480 volt, 16 ampere, 10 kVA 13 3 x 400-480 volt, 16 ampere, 13 kVA 13 3 x 400-480 volt, 16 ampere, 13 kVA 13 3 x 400-480 volt, 16 ampere, 13 kVA 20 3 x 360-500 volt, 32 ampere, 20 kVA 13 3 x 400-480 volt,	Power [kw] Connection Shrink Fit Chuck [mm] 10	10 3 x 400 - 480 volt, 16 ampere, 10 kVA 350 600 x 900 x 600 13 3 x 400 - 480 volt, 16 ampere, 13 kVA 510/570* 860 x 970 x 500 13 3 x 400 - 480 volt, 16 ampere, 13 kVA 510/570* 860 x 970 x 650 13 3 x 400 - 480 volt, 16 ampere, 13 kVA 510/570* 860 x 970 x 650 13 3 x 400 - 480 volt, 16 ampere, 13 kVA 510/570* 860 x 970 x 650 20 3 x 360 - 500 volt, 32 ampere, 20 kVA 550 860 x 970 x 650 13 3 x 400 - 480 volt, 230 750 x 650 x 6	Power [kW] Connection Shrink Fit Chuck [mm] Dimensions [mm] Weight [kg] 10 3 x 400 – 480 volt, 16 ampere, 10 kVA 350 600 x 900 x 600 45 13 3 x 400 – 480 volt, 16 ampere, 13 kVA 510/570* 860 x 970 x 500 50 13 3 x 400 – 480 volt, 16 ampere, 13 kVA 510/570* 860 x 970 x 650 70 20 3 x 360 – 500 volt, 32 ampere, 20 kVA 550 860 x 970 x 650 85 13 3 x 400 – 480 volt, 32 ampere, 20 kVA 550 750 x 620 x 650 75


ZOLLER

solutions

More speed, high quality, safer processes — ZOLLER system solutions allow you to achieve more from all aspects of production. To do so, we combine hardware, software and services for our customers to create optimal system solutions for presetting, measuring, inspection and management of tools. Everything from a single supplier. Everything for your success. Everything with ZOLLER solutions.

Outstanding service included: If you have any questions, please contact us at: +49 7144 8970-137

ZOLLER Solutions



Presetting & Measuring
Tool Management
Inspection & Measuring
Automation

