

LB EX III Series

LB2000EX III / LB3000EX III / LB4000EX III

1-Saddle CNC Lathes



LB EX III Series

LB2000EX III / LB3000EX III / LB4000EX III

1-Saddle CNC Lathes

Long-selling brand that is loved and evolving

Released in 2007
More than
19,000 units
were sold in total
in the series

Selling a total of more than 19,000 units, the LB-EX series

has continuously evolved and supported the shop floor around the world

for more than 15 years as Okuma's flagship models featuring high accuracy and high productivity.


LB EX III series has enhanced the basic performance of the LB-EX series to "cut well," "cut accurately,"

and "be reliable in use" and has also increased flexibility to adapt to advanced energy-saving solutions,

manpower saving, and automation for further evolution.

It realizes both energy saving and high accuracy/productivity at a high level.

In addition, equipped with OSP-P500, a next-generation CNC that maximizes the factory utilization rate,
the machine helps solve problems on the shop floor and social challenges faced by the manufacturing industry.

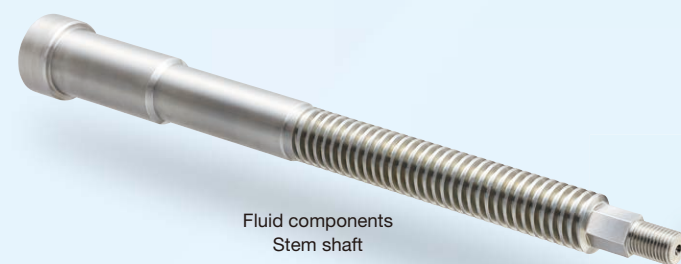

Fluid components
Stem shaft



Automotive parts
Wheel hub



Parts for electric vehicles
Motor shaft



LB3000EX III



LB2000EX III






LB4000EX III

Photographs and images used in this brochure may include optional equipment.

LB3000 EX III Special Website

"Tomorrow's Manufacturing" as talked about by developers

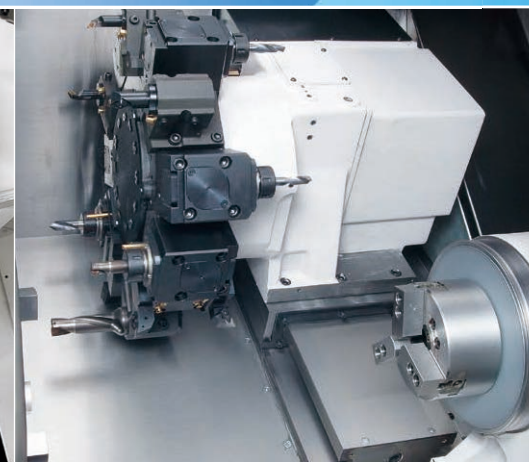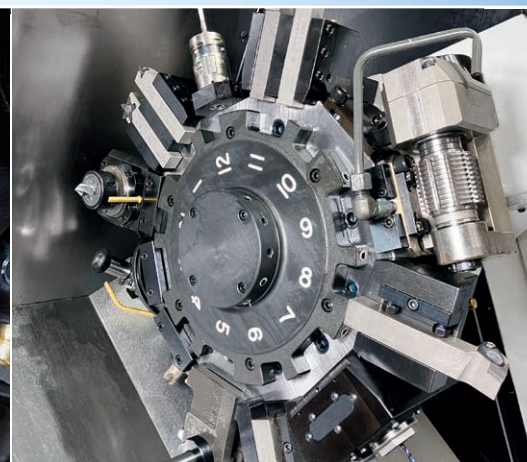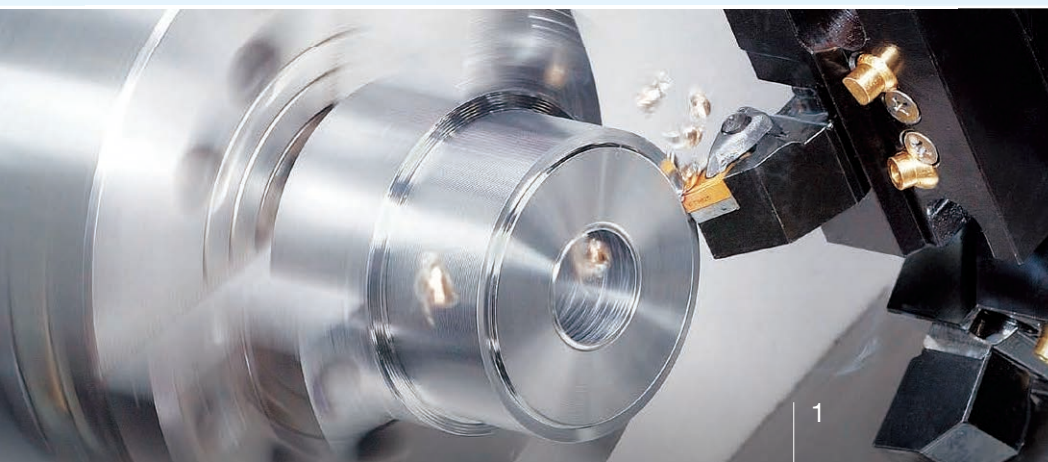

OKUMA'S PURPOSE (the reason Okuma exists)

Contributing to society with the power of manufacturing services

Based on the concept of “total responsibility,” which means providing everything related to machine tools, from products to machining technology, Okuma takes advantage of our strengths as a manufacturer that develops NC controllers in-house. Okuma develops comprehensive manufacturing services to solve challenges and provide value creation in the manufacturing life cycle of individual customers.

Then, we aim to be a company that **solves social challenges** in the global manufacturing industry, such as the declining working demographic and the realization of a carbon-free society, with the power of manufacturing services.

Total responsibility

We have a wide range of products and provide everything from machine technology to control technology, from hardware to software, from products to machining technology, and from before-sales services to after-sales services.

M-E-I-K
(Mechanics - Electronics - IT - Knowledge)
merging technologies
Products for total responsibility



Okuma's comprehensive manufacturing services

Technologies and products we provide

Solutions for manufacturing DX (digital transformation)

- Production management and operation monitoring using digital technology

Factory visualization to help increase the operating rate

In Okuma's next-generation automated factories "Dream Sites," all machines are connected via a network to visualize information about the factory such as the operation status, performance, and machining records. Digital technology is used to help increase productivity.

Provision of solutions for smart factories

- Smart manufacturing
- Automation that can be realized easily

Helping customers reinforce their manufacturing

While Okuma has provided products and services customized to individual customers over many years, mass customization*, which is Okuma's strength, is demonstrated in the Dream Sites and will be provided as a solution for smart factories.

* Concept/mechanism to achieve customized products with productivity that is similar to that of mass production

Supply of smart machines

- Autonomous machine tool featuring both usability and high productivity

Providing the most suitable machines, machining methods, and production methods

Using our advantage of developing NC controllers in-house, as well as the performance of machines with extremely high-accuracy stability and machining capabilities, we provide the most suitable machines, machining methods, and production methods flexibly and quickly for a wide range of industries and applications.

Offering comprehensive manufacturing services to help customers create value

LB EX III Series

For the realization of a sustainable society

More powerful solutions for addressing societal challenges



Decrease in skilled workers and transmission of skills

Thermo-Friendly Concept P9

The Okuma Intelligent Technology that enables machines to autonomously maintain high accuracy stability

Machining Navi P12

Cutting condition search

AI Machine Diagnosis P20

Detects signs of failure

Collision Avoidance System P16

Collision prevention


Smart OSP Operation P31

Very easy for even a beginner to use

Increase in cyber-attacks

OSP-VPSII P32

Robust security

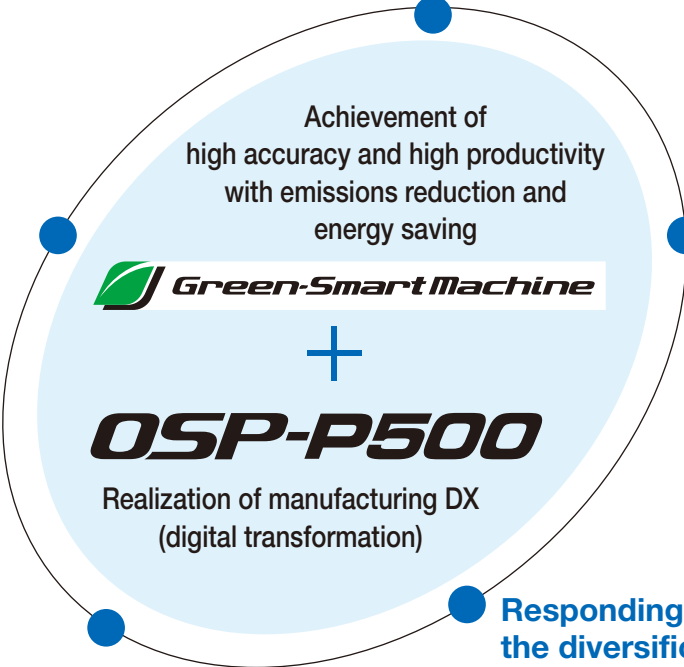

Decrease in the working population

Sludgeless Tank P20

Reduction of the burden of tank cleaning

Automated system P21

Solution to labor shortage and increase in productivity

Climate change mitigation

Thermo-Friendly Concept P9

The Okuma Intelligent Technology that enables machines to autonomously maintain high accuracy stability

Sludgeless Tank P20

Reduction of coolant needing disposal

ECO suite plus P33

A system for an energy-saving society

Responding to the diversification of needs and improving operating rates

Automated system P21

Useful for a wider range of workpieces

Digital twin P29

Faithful digital reproduction of machines and processes

Achieving high accuracy and high productivity while achieving decarbonization and energy saving




Reducing energy consumption while maintaining stable high accuracy and high productivity

To work toward the realization of a carbon-free society, the industrial world is required to consider resources and the environment, and strengthen efforts to reduce emission.

Okuma will contribute to the realization of a carbon-free society and help make society sustainable by working to improve the basic performance of machine tools, such as high accuracy and high productivity, as well as energy efficiency.

We chose the name “**Green-Smart Machine**” for our machine tool that achieves high accuracy and reduced energy consumption autonomously and realizes high productivity. With Green-Smart Machines, we will contribute to the solution of social issues faced by the global manufacturing industry, together with our customers.

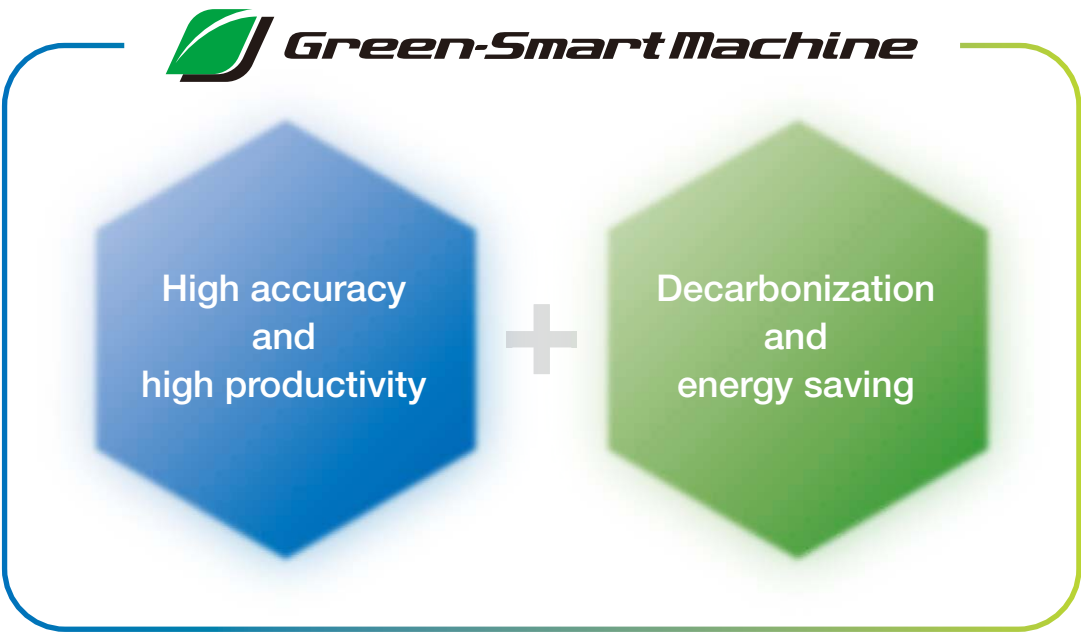

 **Thermo-Friendly Concept**
The Okuma Intelligent Technology that enables machines to autonomously maintain high accuracy stability

ECO suite plus
A system for an energy-saving society

The innovation that accepts temperature changes



Thermo-Friendly Concept



The Okuma Intelligent Technology that enables machines to autonomously maintain high accuracy stability

Integrated machine design and control technology

In the Thermo-Friendly Concept, machine designs play the principal role. With simple machine construction and machine designs that equalize ambient temperatures, the machine deforms in a manageable manner and complex torsion or tilting is controlled to make the deformation predictable. Moreover, thermal deformation caused by changes in the room temperature, frequent spindle speed changes, and the temperature of the coolant are all controlled precisely with the highly accurate control technology by OSP, a controller developed by Okuma in-house. With the Thermo-Friendly Concept, manageable thermal deformation is accurately controlled to limit the behavior of dimensional changes, behavior which also matches the intuition of skilled workers, within a stable range with high accuracy.

High accuracy can be achieved in normal factory environments

The machining accuracy of workpieces changes significantly due to the ambient temperature around the machine, heat generated by the machine, and heat generated in machining. The Thermo-Friendly Concept is a unique concept to “accept” such temperature changes so that high accuracy stability can be achieved in normal factory environments with no special measures taken by the user.

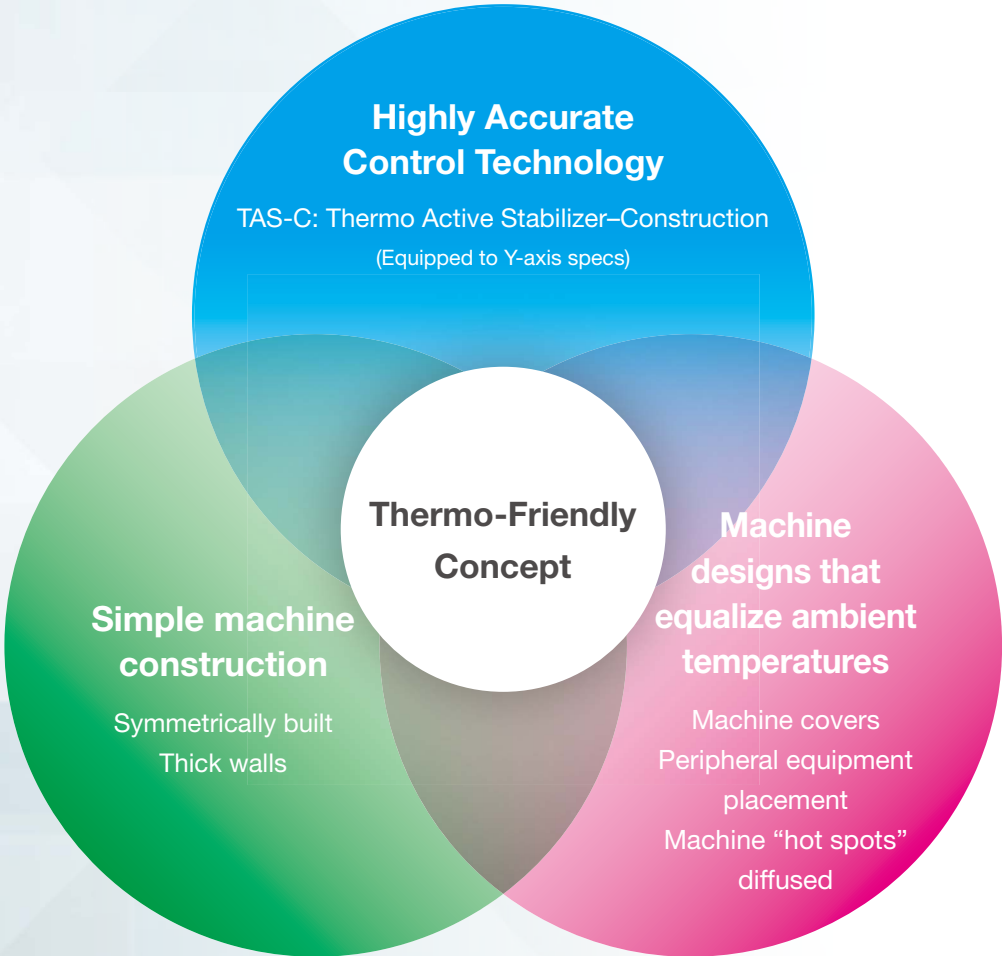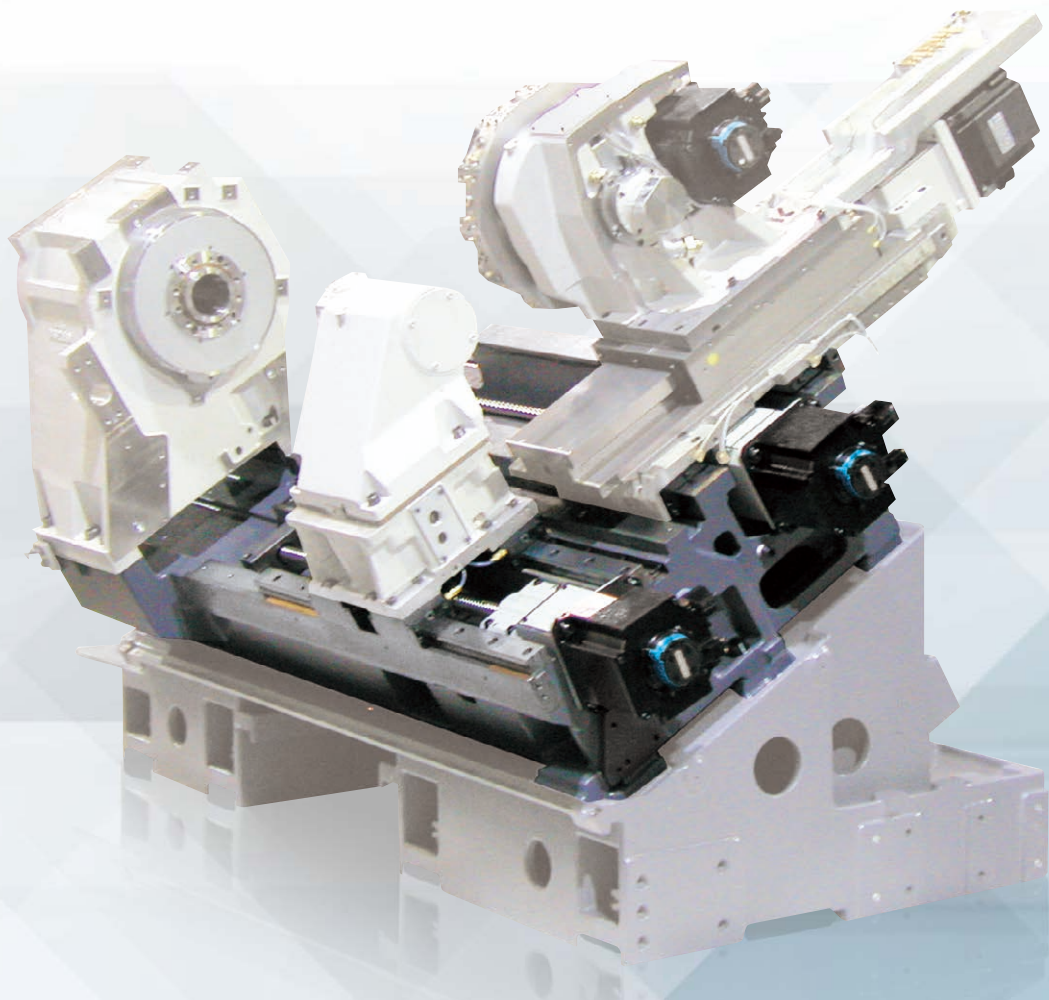

We pursue our goal of seeing how much benefit we can bring to machine shops

With the aim of creating products that satisfy our customers worldwide, over more than 30 years Okuma has conducted a wide variety of testing in environmental test rooms, which can accommodate not only small machines but also large double-column machining centers. The massive amount of test data accumulated in those rooms served as the foundation of the Thermo-Friendly Concept, which has been applied to more than 70,000 machines. We will continue to pursue our goal of seeing how much benefit we can bring to machine shops, and work to develop products that can achieve high machining accuracy in all kinds of usage environments.

High accuracy

Secured accuracy enables to reduce workload in controlling dimensions and realize stable machining over long hours

The whole machine is designed to achieve high accuracy. Outstanding dimensional stability enables stable machining of high-accuracy parts and stable operation over long hours

Unparalleled outstanding dimensional stability


The Thermo-Friendly Concept is Okuma Intelligent Technology intended to achieve amazing machining accuracy with unique structural design and thermal deformation control technology. It eliminates the need for cumbersome dimensional compensation and warm-up and demonstrates outstanding dimensional stability in long-term continuous machining, multitasking machining, front and back side machining with a sub spindle, and Y-axis machining.



Thermo-Friendly Concept

The Okuma Intelligent Technology that enables machines to autonomously maintain high accuracy stability

Machining dimensional change over time (actual data)

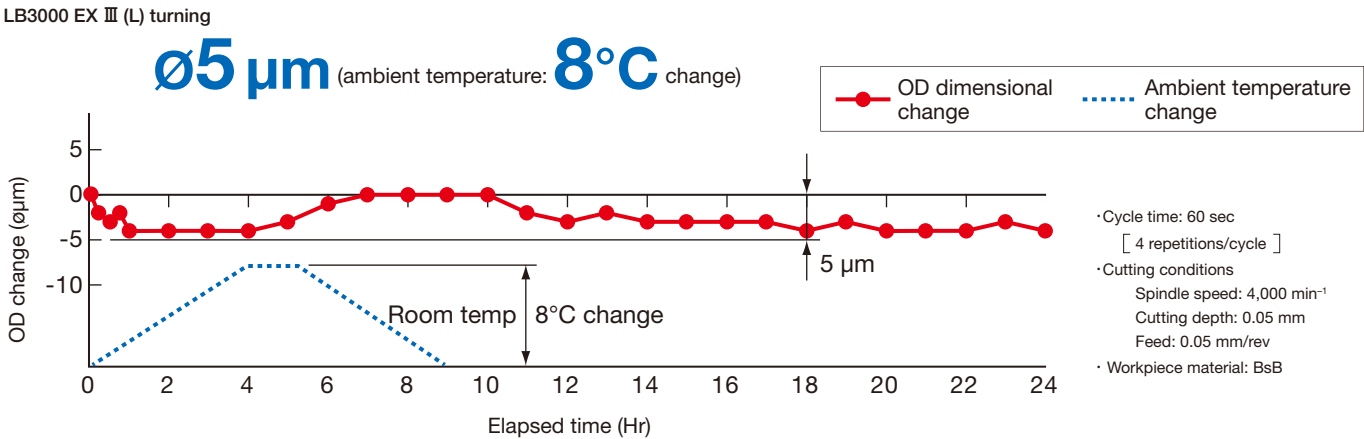

Note: The "actual data" referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting and other conditions.

Significant reduction of the need for warm-up and dimensional compensation

Due to outstanding dimensional stability, warm-up is not required and, if the dimensions are checked in the morning before operation, it is not necessary to compensate later, even when the ambient temperature has changed or the machine has been temporarily stopped.

Effect of the Thermo-Friendly Concept

Ordinary lathe

Lathe to which the Thermo-Friendly Concept is applied

Time of warm-up and dimensional compensation in a day

68 min

→

3 min

Finished goods


226 workpieces

→

260 workpieces


15% UP

A daily schedule of machining

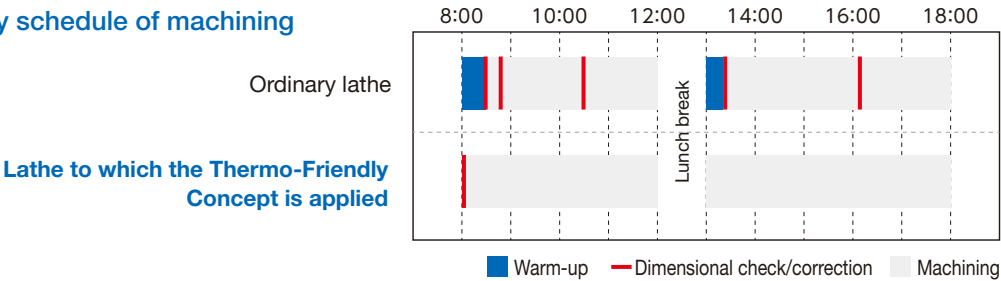

Superior construction and rigidity—slanted-box bed configuration

The slanted-box bed construction is used in the machine. In this structure, which is highly praised as a robust construction unique to Okuma, the primary units of headstock and turret on a box bed are optimally placed for outstanding dimensional stability and high rigidity. It provides stable machining accuracy even in heavy-duty cutting.

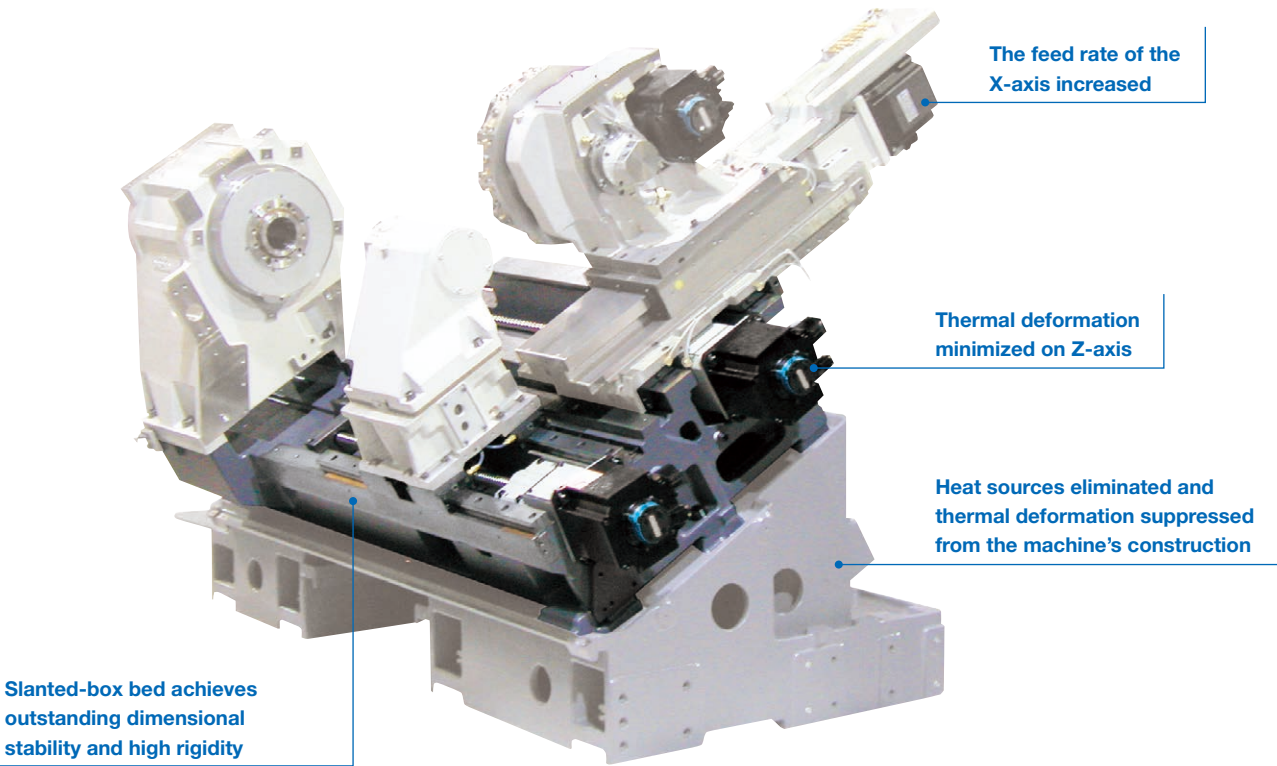

The feed rate of the X-axis increased


Thermal deformation minimized on Z-axis

Heat sources eliminated and thermal deformation suppressed from the machine's construction


Slanted-box bed achieves outstanding dimensional stability and high rigidity

Achieving high-accuracy machining

Roundness [Actual data]

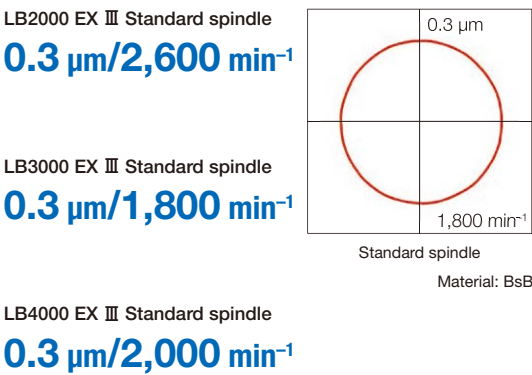


Tool nose uniformity (for better surface roughness) [Actual data]

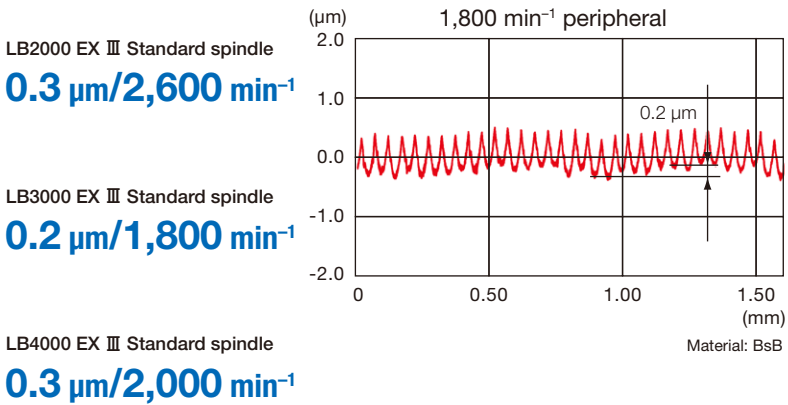

Note: The "actual data" referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting and other conditions.

Productivity is increased with powerful machining and quick machine movements

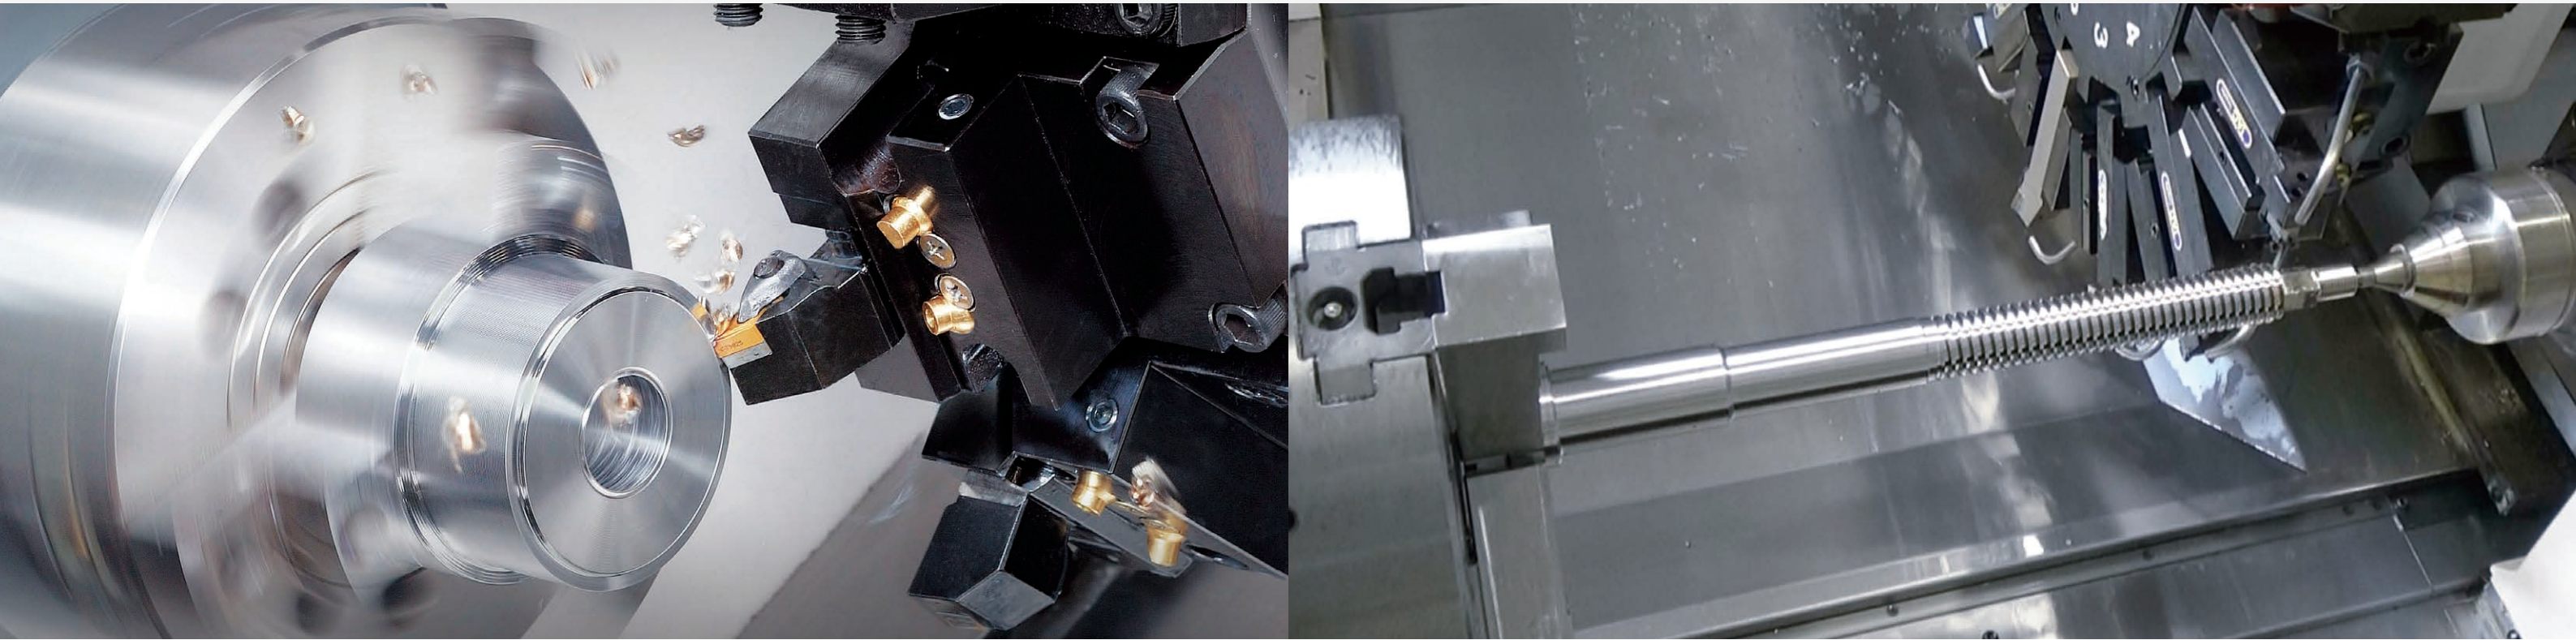

Turning (Workpiece material: S45C)

2.7 mm²
(0.004 in²)

4.4 mm²
(0.007 in²)

6.3 mm²
(0.010 in²)

LB2000 EX III [Actual data]	LB3000 EX III [Actual data]	LB4000 EX III [Actual data]
Heavy-duty cutting	Heavy-duty cutting	Heavy-duty cutting
2.7 mm ²	4.4 mm ²	6.3 mm ²
Cutting speed V: 150 m/min	Cutting speed V: 150 m/min	Cutting speed V: 150 m/min
Cutting depth t: 5.0 mm	Cutting depth t: 8.0 mm	Cutting depth t: 10.0 mm
Cutting feed f: 0.54 mm/rev	Cutting feed f: 0.55 mm/rev	Cutting feed f: 0.63 mm/rev

Drilling	Drilling	Drilling
ø30 carbide insert drill	ø63 carbide insert drill	ø63 carbide insert drill
Cutting speed V: 150 m/min	Cutting speed V: 150 m/min	Cutting speed V: 179 m/min
Cutting feed f: 0.24 mm/rev	Cutting feed f: 0.25 mm/rev	Cutting feed f: 0.25 mm/rev

Note: The "actual data" referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting and other conditions.

Non-cutting time is shortened with high-speed movements, resulting in increased productivity

	LB2000 EX III	LB3000 EX III	LB4000 EX III
Rapid traverse	X: 30 m/min (1,181 ipm) 20% shorter cycle time* Z: 30 m/min (1,181 ipm)		
Spindle start/stop	3.4 sec (6,000 min ⁻¹)	3.0 sec (5,000 min ⁻¹)	4.4 sec (4,200 min ⁻¹)
Turret index time	0.1 sec/1 index	0.1 sec/1 index	0.2 sec/1 index
NC tailstock rapids	12 m/min		

* Previous machine comparison

A powerful motor is used to achieve high productivity

Equipped with a high-speed, wide-area, full-power integral motor, this machine can achieve stable, high-quality machining for both heavy-duty and high-speed cutting.

	LB2000 EX III	LB3000 EX III	LB4000 EX III
Spindle size	Bearing ID ø100 mm (ø3.94 in) (bore ø62 mm (ø2.44 in))	Bearing ID ø120 mm (ø4.72 in) (bore ø80 mm (ø3.15 in))	Bearing ID ø140 mm (ø5.51 in) (bore ø91 mm (ø3.58 in))
Spindle speed	6,000 min ⁻¹	5,000 min ⁻¹	4,200 min ⁻¹
Max output	11 kW (15 hp)	22 kW (30 hp)	30 kW (40 hp)
Max torque	160 N-m (118 ft-lbf)	427 N-m (314 ft-lbf)	700 N-m (515 ft-lbf)


Suppressing chatter during turning

Machining Navi L-gII

Cutting condition search function for turning

option

Varying the spindle speed in accordance with the best amplitude and period makes it possible to suppress chatter during turning. The use of optimum cutting conditions can extend the tool life and shorten the machining time, which is effective for deep hole boring bars and grooving.

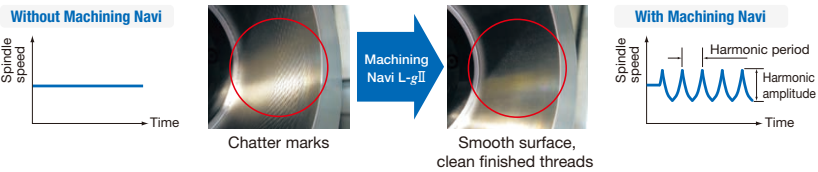


Suppressing chatter during threading

Machining Navi T-g Threading

Cutting condition search function for threading

option


The spindle speed is changed for each threading pass to interrupt the vibration periodicity and make it possible to suppress chatter during threading.

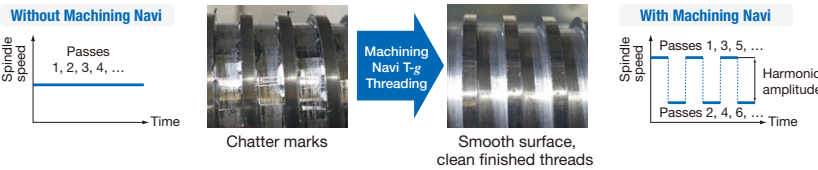

More efficient turning of long workpieces with auto follower rest


By synchronizing with turret in NC part program, support is always provided near the place being cut, even with long or cantilevered workpieces.

(Optional specification for LB3000 EX III with 1300 DBC L/M spec and 1200 DBC MY spec)

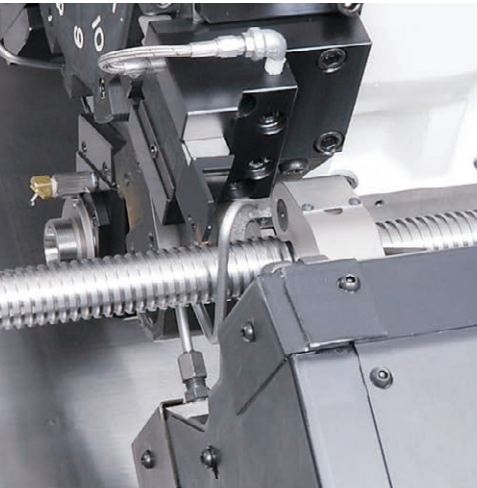

The auto follower rest uses rack-and-pinion movement.

Highest milling performance in the class with high-speed movements and high accuracy

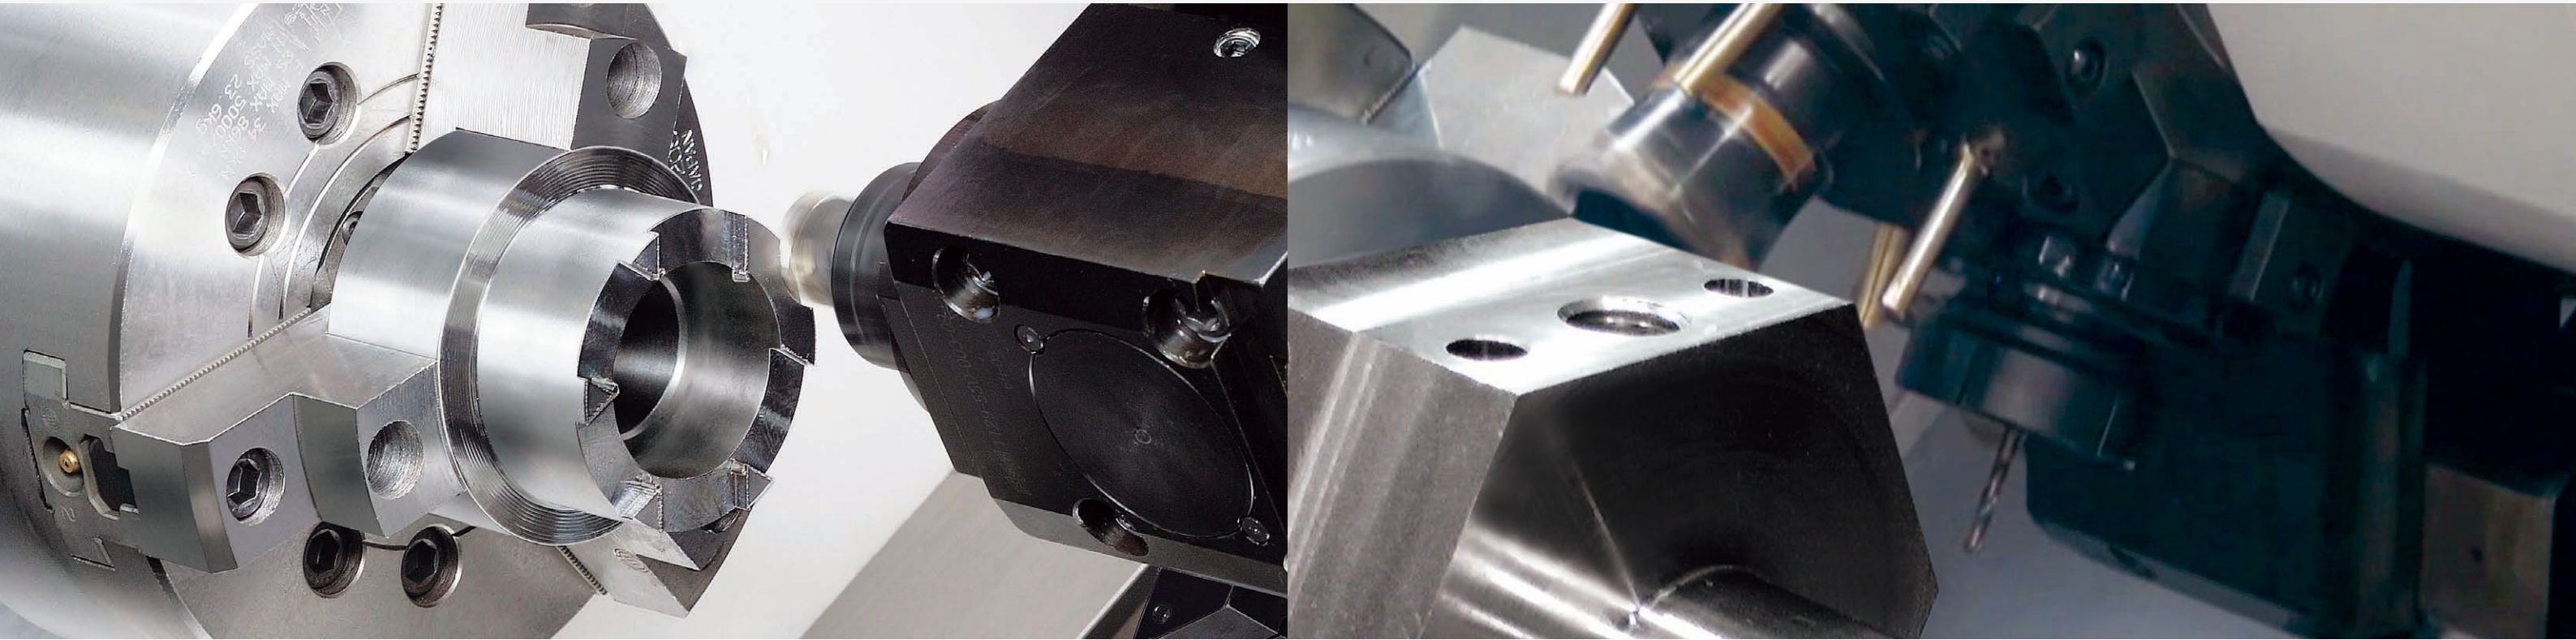

Milling capacity (Workpiece material: S45C)

200 cm³/min (12.2 in³/min)

LB2000 EX III [Actual data]	LB3000 EX III [Actual data]	LB4000 EX III [Actual data]
End milling	End milling	End milling
Cutting volume 144 cm³/min	Cutting volume 200 cm³/min	Cutting volume 200 cm³/min
ø20 7-flute carbide	ø20 7-flute carbide	ø20 7-flute carbide
Cutting speed V: 200 m/min	Cutting speed V: 200 m/min	Cutting speed V: 200 m/min
Cutting depth x cutting width t: 1.8 x 20 mm	Cutting depth x cutting width t: 2.5 x 20 mm	Cutting depth x cutting width t: 2.5 x 20 mm
Feed rates f: 4,010 mm/min	Feed rates f: 4,010 mm/min	Feed rates f: 4,010 mm/min
Drilling	Drilling	Drilling
ø20 carbide solid drill	ø20 carbide solid drill	ø28 carbide insert drill
Cutting speed V: 135 m/min	Cutting speed V: 135 m/min	Cutting speed V: 90 m/min
Cutting feed f: 0.18 mm/rev	Cutting feed f: 0.3 mm/rev	Cutting feed f: 0.2 mm/rev
Tapping	Tapping	Tapping
M16 P2 (Synchronized tapping)	M20 P2.5 (Synchronized tapping)	M24 P3 (Synchronized tapping)

Note: The "actual data" referred to above for this brochure represent examples, and may not be obtained due to differences in specifications, tooling, cutting and other conditions.

Non-cutting time is shortened with high-speed movements, resulting in increased productivity

	LB2000 EX III	LB3000 EX III	LB4000 EX III
Turret index time	0.1 sec/ 1 index	0.1 sec/ 1 index	0.2 sec/ 1 index
M-spindle start/stop	0.4 sec (6,000 min ⁻¹)	0.3 sec (6,000 min ⁻¹)	0.4 sec (6,000 min ⁻¹)
M-M switch	1.2 sec	0.7 sec	1.5 sec

The main spindle (C-axis) positioning accuracy is further improved to 20 seconds (0.0056 degrees) or less


The C-axis indexing accuracy is significantly improved to respond to workpieces with higher accuracy. The accuracy of milling and gear cutting will be further increased.

Note: The actual data above are values obtained by testing methods in accordance with ISO230-2 in our factories. Their accuracy is not guaranteed.


Compact PREX motor that realizes high productivity

Compact, high-power, high-torque PREX motor also used for milling spindle of the multitasking V12 radial turret. This combined with a powerful, highly rigid bolt clamp system greatly increases multitasking speed.


	LB2000 EX III	LB3000 EX III	LB4000 EX III
M-spindle speed	6,000 min ⁻¹	6,000 min ⁻¹	6,000 min ⁻¹
Max output	5.5 kW (7.5 hp)	7.1 kW (9.5 hp)	7.5 kW (10 hp)
Max torque	31.3 N-m (23 ft-lbf)	40.4 N-m (29.7 ft-lbf)	58.1 N-m (42.7 ft-lbf)

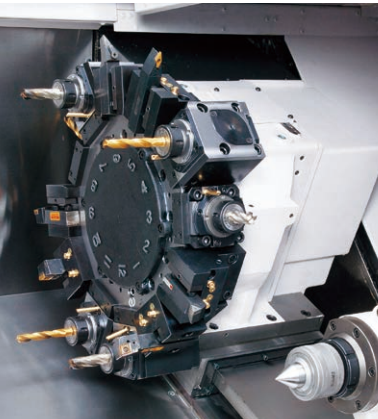

The spindle lineup

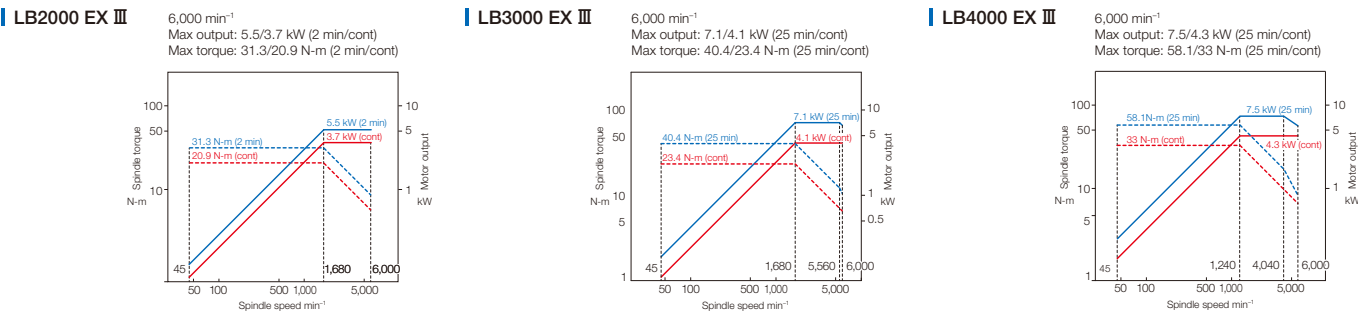

The introduction cost is reduced and productivity is increased

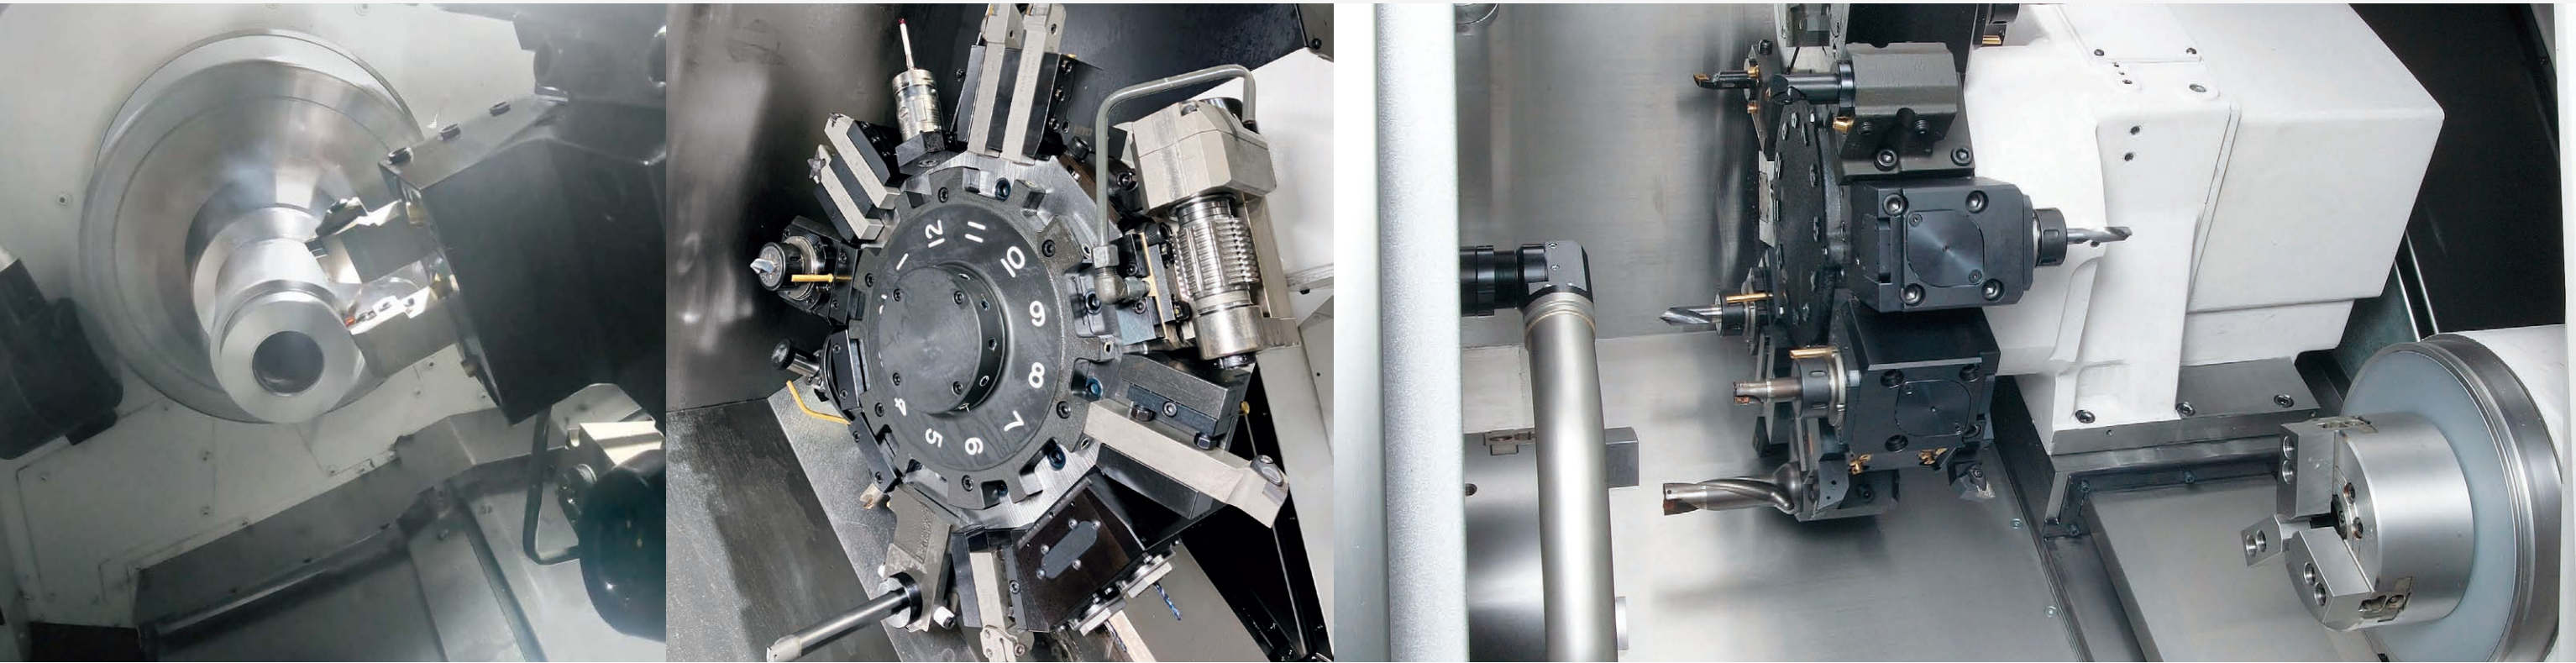


Using the Y-axis function, machining processes conventionally done on a machining center can be performed on a lathe

(Y-axis specs)

A variety of milling operations can be accommodated with high-accuracy, wide-range Y-axis travel using a double slide system. Process-intensive machining in a lathe/machining center is achieved with a single chucking.

		LB2000 EX III		LB3000 EX III	LB4000 EX III
		Distance between centers: 250		Distance between centers: 450	
Y-axis travel	MY specs	100 mm (+50 to -50) (3.94 in (+1.97 to -1.97))	120 mm (+70 to -50) (4.72 in (+2.76 to -1.97))	120 mm (+70 to -50) (4.72 in (+2.76 to -1.97))	140 mm (+70 to -70) (5.51 in (+2.76 to -2.76))
	MYW specs	—	115 mm (+70 to -45) (4.53 in (+2.76 to -1.77))	115 mm (+70 to -45) (4.53 in (+2.76 to -1.77))	140 mm (+70 to -70) (5.51 in (+2.76 to -2.76))
Y-axis rapid traverse		15 m/min (591 ipm)		20% shorter cycle time*	

* Previous machine comparison

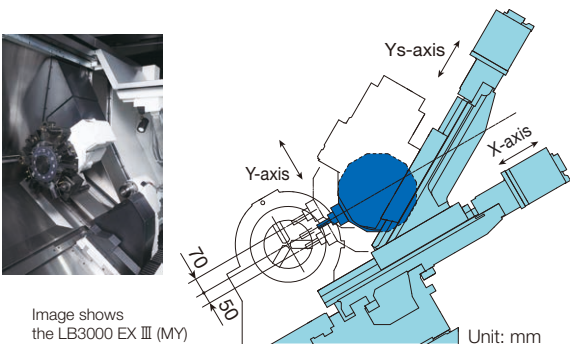

Gear cutting and hobbing, each of which requires a special-purpose machine, are also consolidated

With high-accuracy synchronous control of the workpiece spindle and the tool spindle, gear cutting, which is conventionally handled with a special-purpose machine, is consolidated.

Plate cam

Size	ø215 × 30 mm
Material	SCM440
Modules	2.5



Consolidation of grinding achieved with high-rigidity Y-axis functions

Hard skiving achieves excellent surface roughness by high-speed feeding of flat cutting edges, and consolidates grinding processes with high efficiency. The high-rigidity Y-axis functions also enable hard skiving with large cutting resistance.

Shaft

Size	ø46 × 150 mm	Cutting speed	V: 300 m/min
Material	SCM440 hardened steel	Cutting depth	t: 0.1 mm
Surface roughness	Rz1.0	Feed rate	f: 0.2 mm/rev




Process-intensive machining with a sub spindle
Front and back side machining can be completed with one machine

(W-axis specs)

While front and back side machining conventionally needs two machines, a machine with a sub spindle can complete it alone. The spindles deliver workpieces to each other automatically to enable continuous machining of the front and back sides. Space is saved with a machine that can handle the jobs of two machines.

First operation
(main spindle)



Second operation
(sub spindle)



Wheel hub

Size	ø100 × 90 mm	Material	S45C
------	--------------	----------	------


Allowing operators to focus on making parts



Collision Avoidance System
Collision prevention

option


NC controller (OSP) with 3D model data of workpiece, tool, chuck, fixture and machine components such as headstock, turret, tailstock performs real time simulation just ahead of actual machine movements. It checks for interference or collisions, and stops the machine movement immediately before collision. Operators (novice or pro) will benefit from reduced setup and first-part cycle time, and the confidence to focus on manufacturing parts.

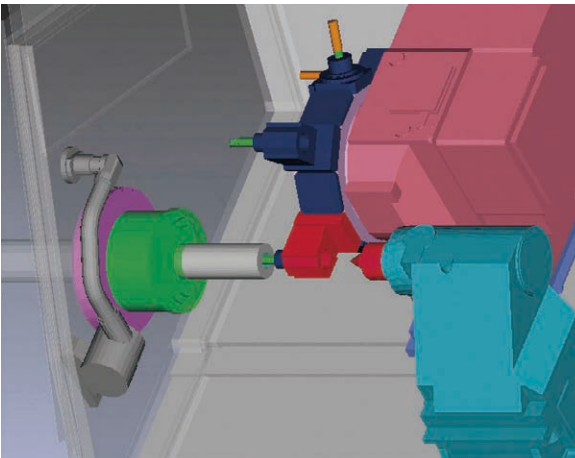

Ease of use with consideration of harmony between people and machines

Ease of operation with the spindle positioned at an appropriate height and good accessibility to the machine

The operator's setup workload is reduced thanks to the easy-to-operate height of the spindle center and good machine accessibility because of the distance of the spindle center from the machine front.

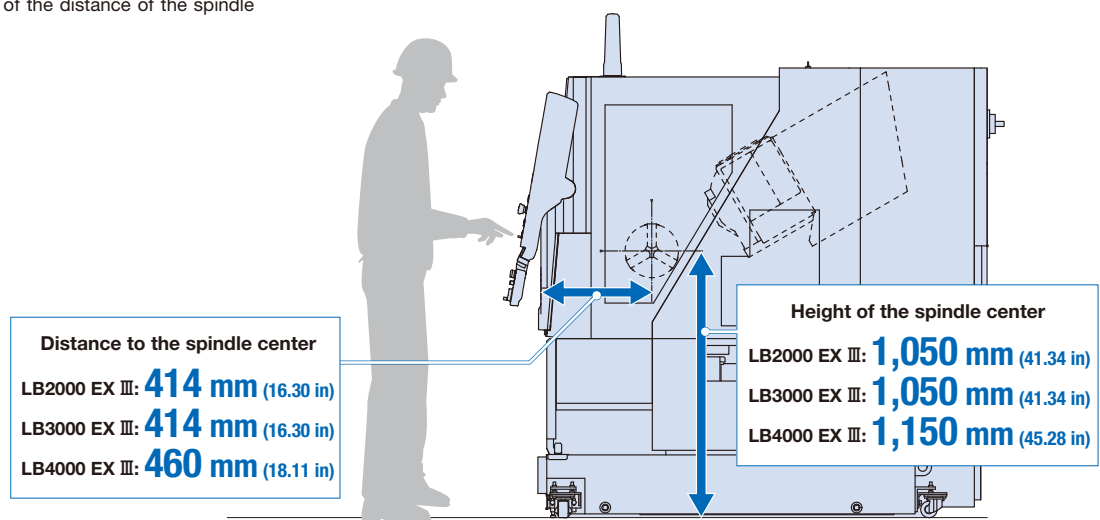

The opening is wide for easy operation.
Heavy workpieces and chucks can be delivered with a crane


Even workpieces of the maximum work length can be loaded and unloaded without tilting. With easy access to the inside of the machine, operators can easily perform setup changes and similar tasks. Heavy workpieces and chuck replacement can be handled with a crane from above.



Photo shows the LB3000 EX III
*1. May vary according to the specifications.
*2. 523 mm (20.59 in) for 250 DBC.

Easy-to-use operation panel with tilt mechanism

A swivel 15-inch operation panel that can be tilted is adopted as a standard to allow it to be operated smoothly according to the body height of the operator.

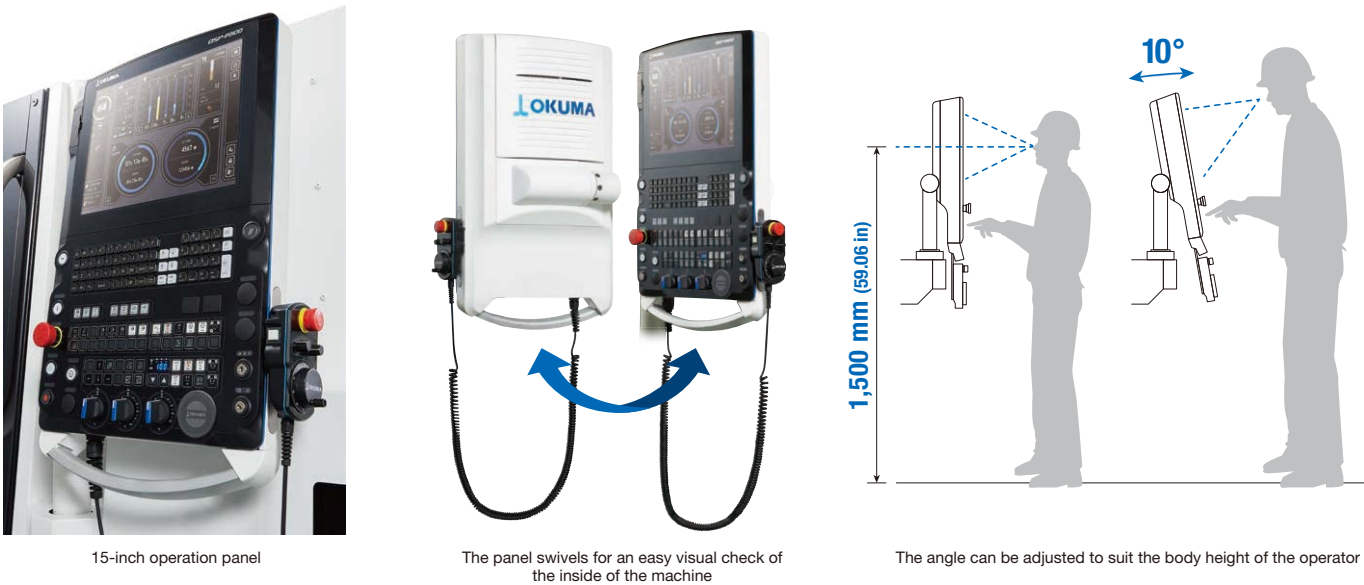

Good maintainability to make daily operations easier while also considering the environment




Various solutions are offered to reduce the operator's workload

Shortened setup and automation of center workpieces

NC tailstock		
Up to 10 pairs of tailstock positions can be set, enabling continuous machining of workpieces with 10 different lengths without setup. In addition, thrust can be switched between high and low without resetting the workpiece. (Tailstock thrust high/low switch: Optional) High accuracy positioning is also possible with a high speed linear guide employing a ball-screw drive.		
Tailstock thrust	LB2000 EX III	LB3000 EX III
	0.5 to 3 kN (Distance between centers: 300)	0.5 to 3 kN (Distance between centers: 250)
	0.5 to 5 kN (Distance between centers: 500)	0.5 to 5 kN (option: 1 to 7.5 kN) (Distance between centers: 500, 1000, 1300)
	(option: 1.5 to 10 kN)	
Rapid traverse	12 m/min (472 ipm)	
Approach	10 m/min (394 ipm)	
Retract	12 m/min (472 ipm)	

Note: Please select a hydraulic quill for face driver machining applications.

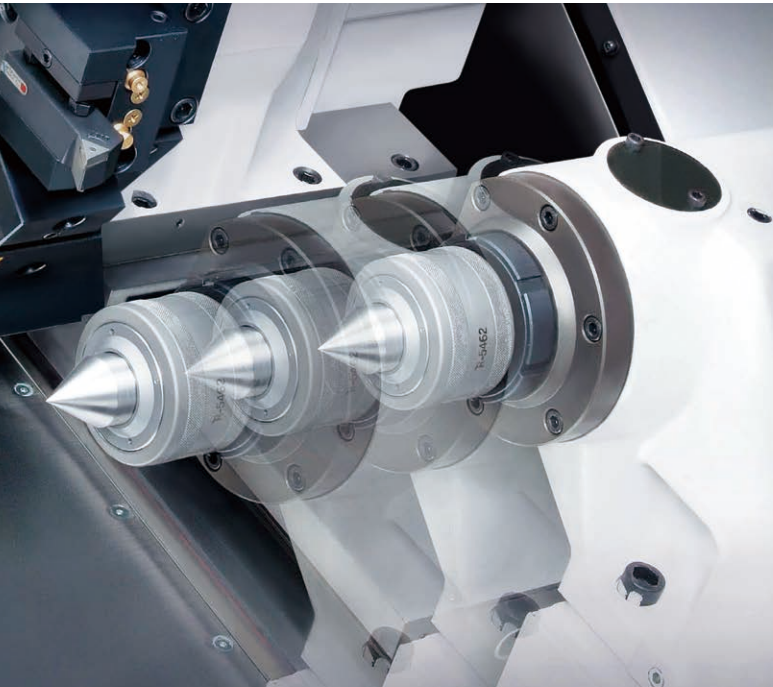

Chucking warp is minimized

NC command for chuck clamp pressure	option
Chuck clamp pressure can be changed by NC command. If the command is given in the program, machining can be performed with the optimum chuck pressure even during automatic operation, which minimizes chucking warp and achieves high-accuracy machining and high-efficiency production.	

Stable machining is maintained over many hours

In-process gauging	option
--------------------	--------

The in-process gauging device automates the measurement and compensation of workpiece dimensions to achieve long-term stable machining.



This photo shows measurements taken along the Y-axis by an LB3000 EX III with Y-axis specs.

Power consumption of the automatic doors is reduced to one-fifth

Automatic open/close electric doors on the front	option
A servo drive is adopted to reduce the power consumption to one-fifth in comparison with air-driven doors.	
Carbon dioxide emissions	47 kg-CO ₂ /year
Power consumption	80% Less
Conditions: Opened/closed 150,000 times a year (operated 24 hours for 300 days a year, operating rate 70%, opening/closing interval 2 minutes)	

Breaking chips with oscillating motion of feed axis

Oscillation cutting	option
---------------------	--------

The feed axis oscillates back and forth, resulting in empty passes where the cutting path crosses over to forcibly break chips. When cutting materials or when using machining methods that produce difficult-to-break chips, oscillation cutting prevents these chips from wrapping around the workpiece and tool. This prevents the machined surface from getting scratched, reduces the operator's workload, and improves productivity by eliminating problems caused by long chips.



Detect signs of ball-screw failure, and reduce downtime

AI Machine Diagnosis Function	option
Detects signs of failure	


Machine tool self-diagnosis technology “AI machine diagnosis function” can detect signs of failure. Machine downtime can be reduced by preventing machine shutdown. The OSP-AI installed in the CNC identifies the presence or absence of any abnormality in the feed axis and the location of the abnormality and detects damage to the ball-screw support bearing and wear of the ball-screw*.

* Ball-screw wear can be detected in the case of AbsoScale detection specification.

Notes: AI diagnostic models are already installed, and diagnoses can be performed by the machine itself.

AI diagnostic models can be updated to the newest version through a computer connected to the internet.

Execute diagnostic tests from the screen guidelines

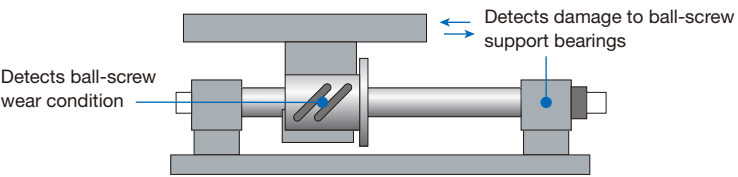

Diagnosis by OSP-AI

Diagnostic results per lamp color

Version	Axis	Acquisition date	Result
2023/02/11	X	16:36:45.240	Normal
2023/02/11	Y	16:31:45.472	Normal
2023/02/11	Z	16:28:35.512	Normal
2023/02/11	X	16:21:49.024	Normal
2023/02/11	Y	16:19:06.160	Normal
2023/02/11	Z	16:15:52.576	Normal
2022/11/13	X	11:31:10.112	Normal

Inspection results
Normal
Progress : 0%
(Certainty : 98)
Send to PC
Save to MD1

Inspection results
Observe
Bearing/Screw
Progress : 50%
(Certainty : 80)
Send to PC
Save to MD1
There are signs of the state change. Please check workpiece.

Inspection results
Scrutiny
Bearing/Screw
Progress : 100%
(Certainty : 100)
Send to PC
Save to MD1
The state change is deteriorating. Please contact OKUMA.


Coolant maintenance work is significantly reduced
The environmental impact of coolant disposal is also minimized

Sludgeless Tank	option
-----------------	--------

The Sludgeless Tank continuously circulates cutting fluid within the tank, efficiently collecting sludge to prevent accumulation and significantly reducing issues and maintenance work. This significantly reduces the frequency of tank cleaning, enabling stable operation over long periods and improving productivity. It also extends the cutting fluid's lifespan, helps prevent spoilage and odors, and creates a better working environment. Furthermore, reducing the frequency of cutting fluid changes decreases industrial waste and lessens the environmental impact.

Sludge removal rate	99% (when the material is casting and aluminum) Notes: After secondary filtration (cyclone filter) permeation Okuma evaluated removal rate
No tank cleaning for 3 years (Okuma equipment actual data)	
No coolant replacement for 3 years (Okuma equipment actual data)	

Note: It is necessary to select a chip conveyor with hinges + scraper (with drum filter) if the Sludgeless Tank option is chosen.

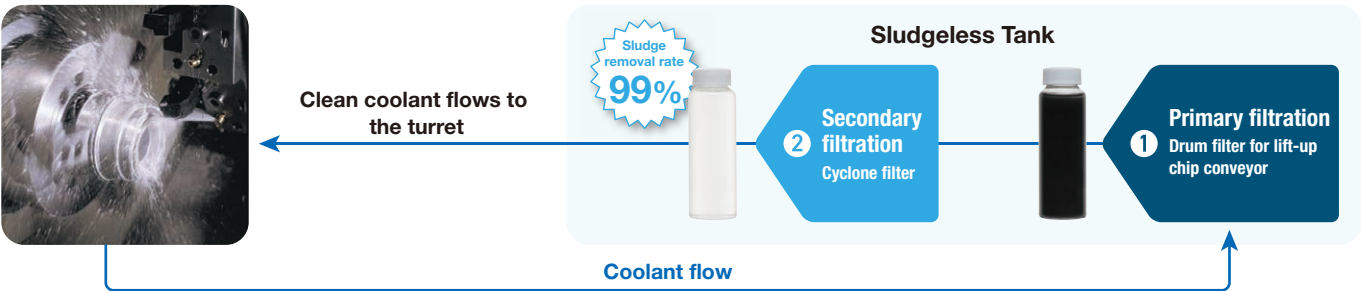

Stable dimensional accuracy increases the productivity of the automated system



Thermo-Friendly Concept

The Okuma Intelligent Technology that enables machines to autonomously maintain high accuracy stability

The Thermo-Friendly Concept is applied to LB EX III Series for outstanding accuracy stability, and also enables the machine to achieve stable dimensional accuracy in long continuous machining. Even in an automated system composed of multiple machines, dimensional variation between the machines is small, saving labor for dimensional management and helping increase productivity.

Advantages of automation

It increases the operating rate of machines for higher productivity, stabilizes quality, and saves manpower.

Optimal cell for mass-production machining of similar parts

Loader

- It is effective for mass-production machining of similar parts
- The workflow line in front of the machine is secured by using the space above it
- It is possible to load/unload in a short time and achieve machining with a short takt time



Compact, flexible, and manpower-saving cell

LB3000 EX III ARMROID

- Automation is possible in existing spaces
- Ability to switch between automatic and manual operations depending on the production situation



Highly versatile and applicable to irregularly shaped parts and high-mix workpieces

Stand-alone articulated robot

- Highly versatile and applicable to irregularly shaped parts and high-mix workpieces
- Layout of peripheral devices is freely configurable
- Transfer between different machines, such as a lathe and a machining center, is possible



Photo shows the LB3000 EX III

Workpiece transfer and load/unload are automated. Combined with standardized peripheral devices, the machine can be operated automatically over many hours.

Loader


option

Workpiece transfer and load/unload are automated. The workpiece transfer and load/unload device is suitable for medium to mass production of workpieces with similar shapes. By effectively utilizing the space above the machine, the workflow line in front of the machine is secured. Combined with standardized peripheral devices, the machine can be operated automatically over many hours.

Examples of a loader system


We propose line configurations that meet customer needs, from one machine with one loader to multi-machine lines.

Automated material supply and product discharge

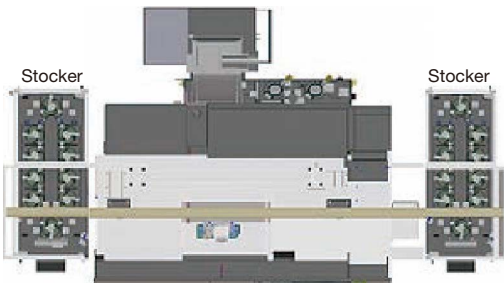


Onboard loader		LB2000 EX III OGL5-OII	LB3000 EX III OGL5-OII	LB4000 EX III OGL10-O
Max workpiece size		ø150 × L100 mm (ø5.91 × L3.94 in)		ø250 × L150 mm (ø9.84 × L5.91 in)
Max carrying load		3 kg (6.6 lb) × 2 pts		5 kg (11.0 lb) × 2 pts
Axis movement	Carrier traveling	180 m/min (7,087 ipm)		120 m/min (4,724 ipm)
	Arm vertical	100 m/min (3,937 ipm)		80 m/min (3,150 ipm)
Hand type		Vertical drop double gripper, 3-jaw air chuck		Rotary-swivel double hand, 3-jaw air chuck
Gripper open/close travel		ø20 mm (ø0.79 in) (effective travel: ø14 mm (ø0.55 in))		

Automation with peripheral devices such as washing and gauging devices

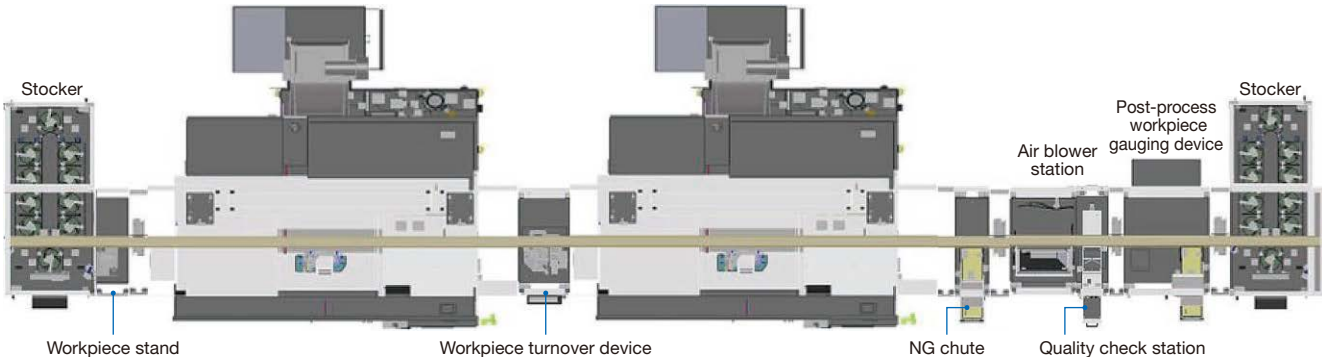

Examples of a loader gripper

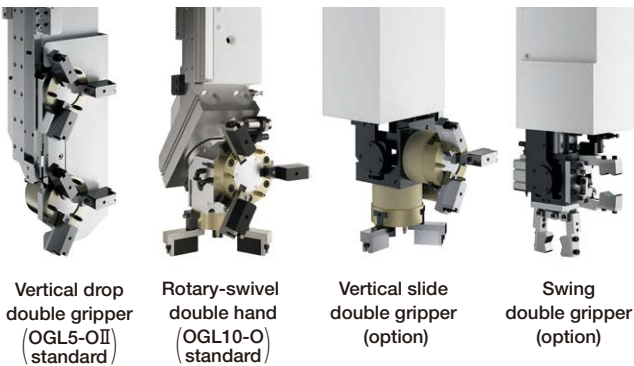

Examples of a workpiece stocker

	Elevating worktable (standard)	Pitch-feed conveyor
Drawings		
Applicable workpieces	For flange	For shaft
Blanks and/or finished parts	Combinable	Dedicated
Variations	3 types of station • 6 stations • 20 stations	Conveyor length 2 types • 1.5 m (59.06 in) • 2 m (78.74 in)

No space to install the robot is needed. Automation can be achieved with minimal space


Automation systems that are easy to operate and easy to install

LB3000 EX III ARMROID

This articulated robot is “built-in” to the workspace area. ROID Navi (interactive robot programming tool) provides in-machine processing support that cannot be achieved with externally installed robots. The operating tools of ARMROID have been developed on the premise that they will be used by machine tool operators, and do not require complicated robot programming. The switch from a single machine to an automated cell is easy by simply attaching the mobile workpiece stocker in front of the machine. Customers can perform production flexibly according to their production plans and work styles. For example, during the daytime they can remove the workpiece stocker and have operators manually loading/unloading for small lot machining, and at night they can use robots to operate automatically.


Additional robot floor space not required

With built-in robot arms, ARMROID requires only the space for the workpiece stocker for automation, which enables the factory space to be used effectively. It is also easy to relocate.

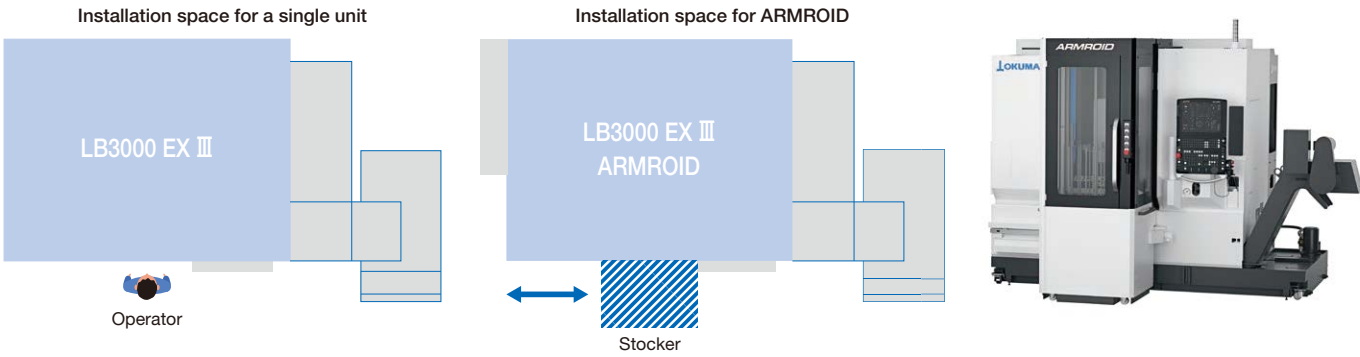

Enabling work sharing by humans and robots

With the built-in robot and a mobile stocker, the human and robot can work with the machine and share their tasks. A variety of production applications can be configured.

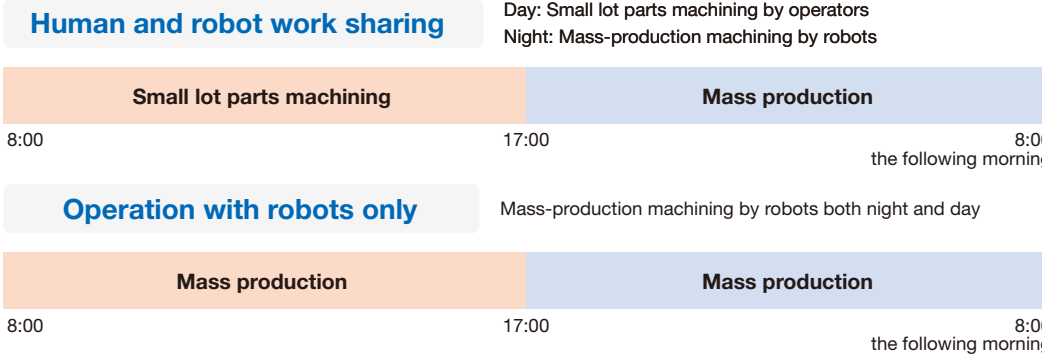

Excellent operability and cost effectiveness


Since machine and robot are controlled by one operation panel, they can be easily handled with similar operations. Once the movements are set according to the guidance of ROID Navi (interactive robot programming tool), the robot automatically generates the optimal movement path. As the machine operator controls the robot, the cost and time for introduction and startup can be reduced dramatically. Setup changes can also be handled in-house, meaning less downtime and lower costs.

Easy machine tool or robot operation by any operator

ROID Navi and the collision avoidance system allow machining to resume easily even after a setup change or item change, which is especially suitable for flexible high-mix, low-volume production.


ROID Navi
(interactive robot programming tool)

The robot's motion program automatically generates an optimal motion path that does not collide, simply by displaying the input start and end points and the parameters according to guidance prompts. Even beginners in robotics can learn the ropes to operate from day one.

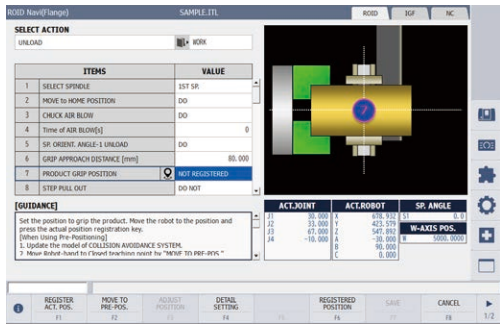

Collision Avoidance System
Collision prevention

The NC controller (OSP) with 3D model data of mechanical structures performs simulation in real-time prior to actual machine operation. Regardless of automatic or manual operation, it is possible to check in advance whether there is any interference due to robot operation.

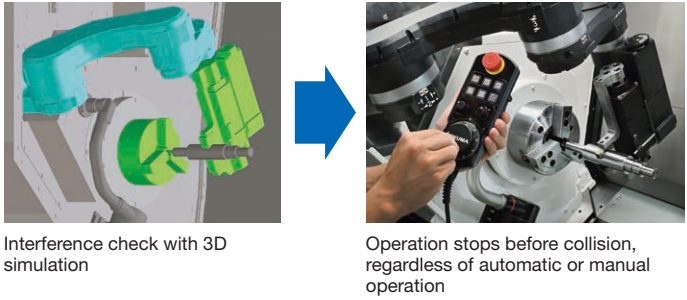

Achieve high-level processing support possible only with built-in robots

Providing in-process support in the machining chamber that is impossible with conventional robots.


Chip removal/In-machine cleaning



Chatter suppression



Part load/unload

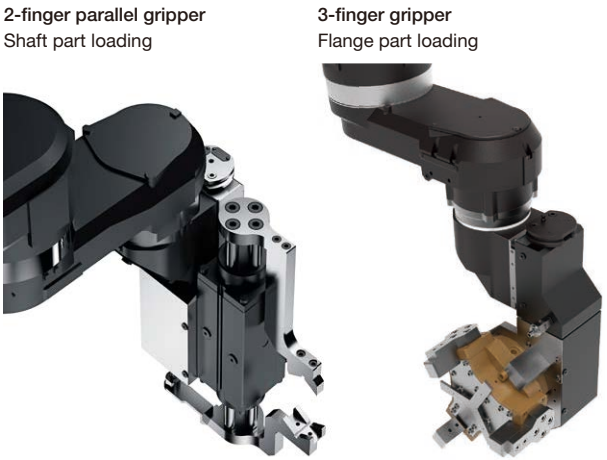

Automated system that meets various needs

Highly versatile and applicable to irregularly shaped parts and high-mix workpieces

Stand-alone articulated robot

option

This stand-alone articulated robot meets the needs of customers who want to automate work, even high-mix, low-volume production, or want to automate measurement, cleaning, and other tasks in addition to workpiece loading and unloading. With high versatility, the robot is widely applicable to odd-shaped or high-mix workpieces. The layout of peripheral devices can be set freely, and it is possible to transfer workpieces between different types of machines such as a lathe and a machining center. An automated cell with a high degree of freedom can be configured according to the customer's production operation.



Photo shows the LB3000 EX III

Example of connecting multiple machines using a robot with a traveling axis (parallel)



Photo shows the LB3000 EX III

Notes: The images in the catalog are for illustrative purposes.
The design and specifications may differ from the actual products.

A wide range of peripheral devices (option) can be included in the automated system to achieve flexible production

The automation and manpower saving of production lines is supported by workpiece turnover and other devices that are indispensable for connecting processes. An optimal system can be configured with a wide variety of peripheral devices according to the customer's needs.


Workpiece stand

The stand is used to adjust the posture of the material to be grasped by the hand. Re-grasping workpieces that tilt during stacking enables workpieces to be transported in a stable posture.



Workpiece turnover device

This device turns workpieces over onto the reverse side. The gripper rotates 90 degrees and the table moves up and down to transfer workpieces. Reversing workpieces allows both sides to be machined.

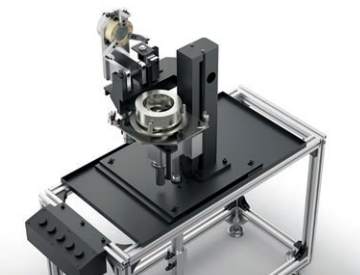


NG chute

This device discharges materials and unmachined workpieces judged to be NG by chucking error detection. Each NG item is carried off on the inclined chute and its own weight causes it to be ejected.



Air blower station

This device performs air-blowing cleaning of machined products. It cleans workpieces inside the device while gripping them with air-blowing to remove coolant and chips adhering to machined items.

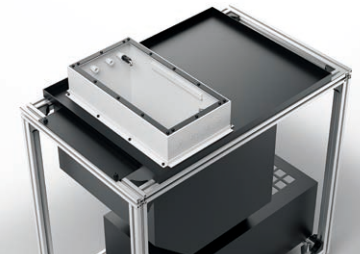

Phase determination device

This device detects the phase reference parts (spikes, notches, holes, grooves, etc.) on the outer periphery of workpieces, and stabilizes the workpiece supply phase to the machine. It is used for avoiding interference of the jaw part stop during chucking and for workpieces that require phasing during milling and other operations.



Quality check station

This device discharges machined products for quality check.



Material supply is automated

Bar feeder

option

Bar materials are supplied into the spindle.



Photo shows the LB3000 EX III

The discharge of machined workpieces is automated

Parts catcher

option

This device discharges workpieces automatically with a simple mechanism.



A next-generation CNC that makes customer manufacturing DX (digital transformation) a reality

OSP-P500

Improved productivity and stable production

As Your Single Source for M-E-I-K (Mechanics - Electronics - IT - Knowledge) merging technologies, Okuma offers this CNC to build an advanced “digital twin” that faithfully reproduces machine control and machining operations and creates new value. Featuring ease of use that allows anyone to easily start machining and create a program with high productivity, the product helps improve productivity and realize stable production. Additional features are: control technology that achieves high-speed and high-accuracy machining and robust security functions to protect against the increasing threat of cyber attacks.


15-inch operation panel




Home screen



Virtual machining

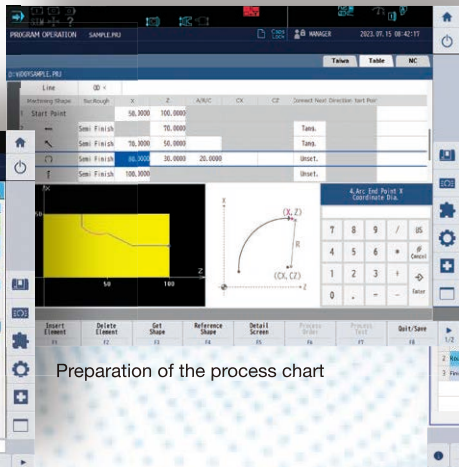


Preparation of the process chart

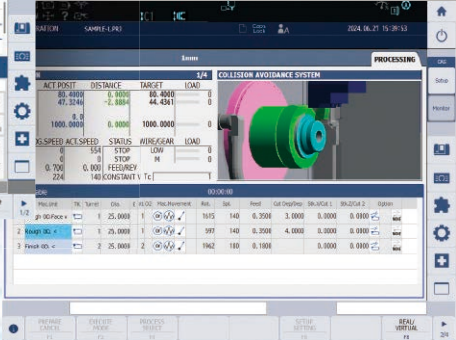

Operation with the process chart

- 1 Faithful digital reproduction of machines and processes
- 2 Easily create high-productivity programs — no programming knowledge required
- 3 Realizing high-speed and high-accuracy machining
- 4 Increasing cyber resilience

- Ground-breaking concept of a digital twin
- Innovative operability
- Revolutionary control technology
- Robust security

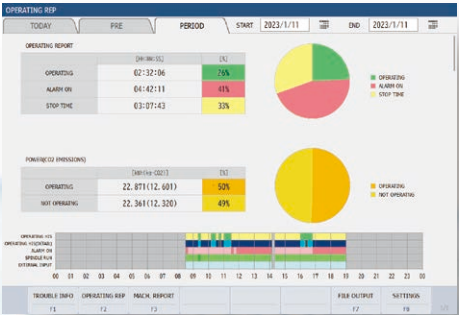

MacMan plus

OSP-P500

A next-generation CNC that makes customer manufacturing DX (digital transformation) a reality

1

Faithful digital reproduction of machines and processes

Digital Twin

option

I

Ground-breaking concept of a digital twin

Okuma's digital twin faithfully simulates a virtual machine, offering control equivalent to that in a real environment, by using the latest machine operation data and 3D models. Through super high-speed and high-accuracy simulation based on the features of Okuma, which is a machine tool manufacturer that produces NC control in-house, the digital twin calculates cycle time, machining shape, and electricity consumption. It supports accurate estimates of cycle time, development of the machining schedule, and quick and accurate estimates of delivery time and costs when an order is received.

■

Two digital twin systems are made possible by using an office PC and OSP-P500

Simulation using the latest machine information can be achieved with an office PC and OSP-P500 installed on the physical machine. This enables preparation for machining in advance in the office environment (front loading). Preparing machining for the next part while continuing machining can reduce the preparation time for the physical machine. When a problem occurs on the shop floor, it can be solved quickly on site without going back to the office.

Okuma's 2

digital twin systems

Digital Twin On PC *

Simulate shop machines in the office

Front loading is performed with the actual status matched with the data on the office PC to further improve productivity. Highly accurate pre-verification minimizes trial and error in first part machining, and reduces machine downtime to the minimum.
* The PC software is to be used with one package for one machine.


Digital Twin On Machine

Simulating the CNC of a real machine

Super-fast and super-accurate machining simulations are performed with the CNC of a real machine on-site to minimize machining preparation work. Actual machining can be started immediately, greatly improving the operating rate of the machine.

Front loading

Reducing work on the physical machine to increase the operating rate

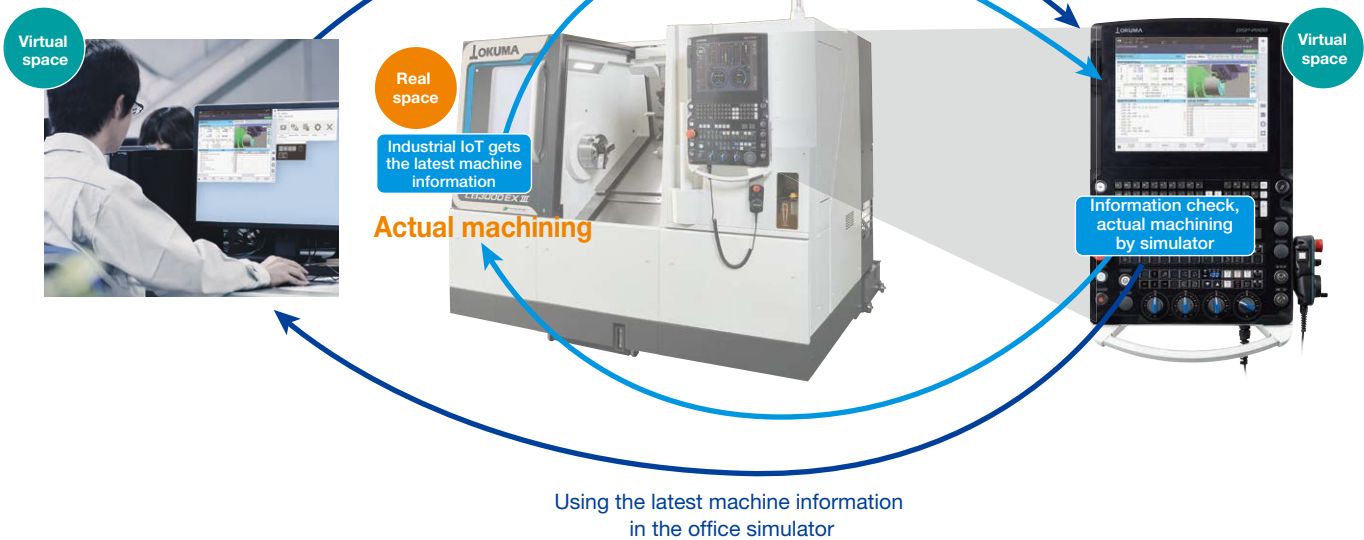


■

Using the latest machine information to support the production plan with high-speed, high-accuracy machining time estimation

Time is estimated accurately to support customer production plans and also solve machining problems quickly in the digital sphere.

Virtual machining

Time is estimated accurately by considering not only axis movements but also peripheral units such as auto tool changers, and collecting real drive data on physical machine movements to give feedback to the virtual machine. In addition, power consumption and carbon dioxide emissions are displayed.

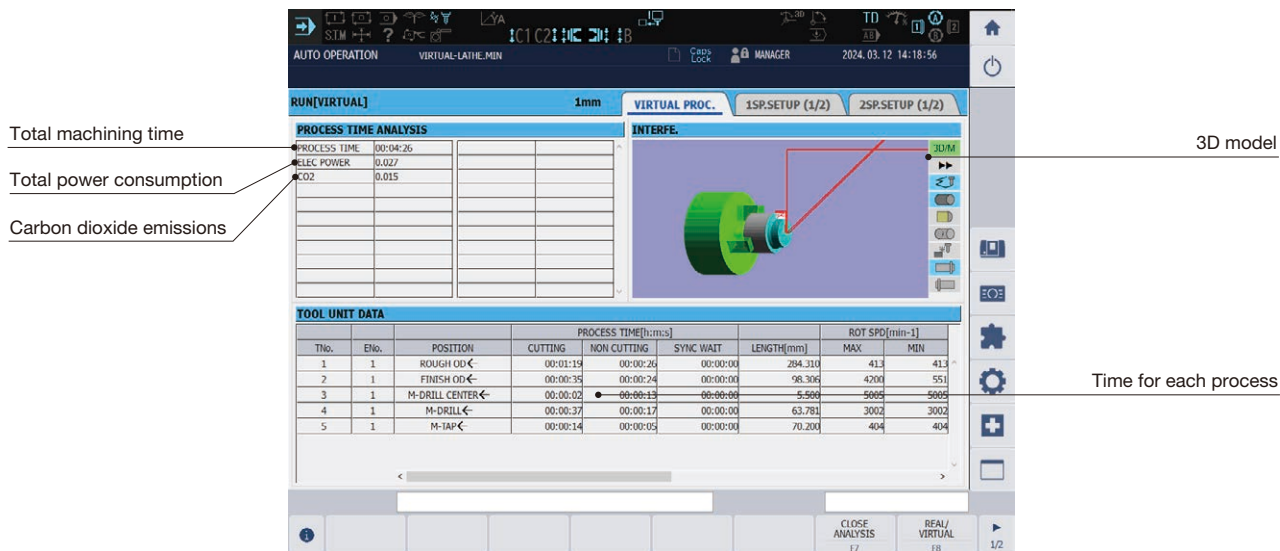


■

Reducing the burden of the operator with variously 3D models and easy modeling of fixtures and materials

A virtual space for simulation is easily set up.

Quick modeling

Modeling of tools for simulation can be easily prepared. With over 1,000 types of 3D models available, tool models that were previously created using easy modeling can now be prepared quickly and effortlessly. Create a tool to be used by selecting from the variously 3D models according to the guide and set the NC tool data at the same time. For shapes with simple fixtures and materials, you can prepare models easily just by entering the dimensions.

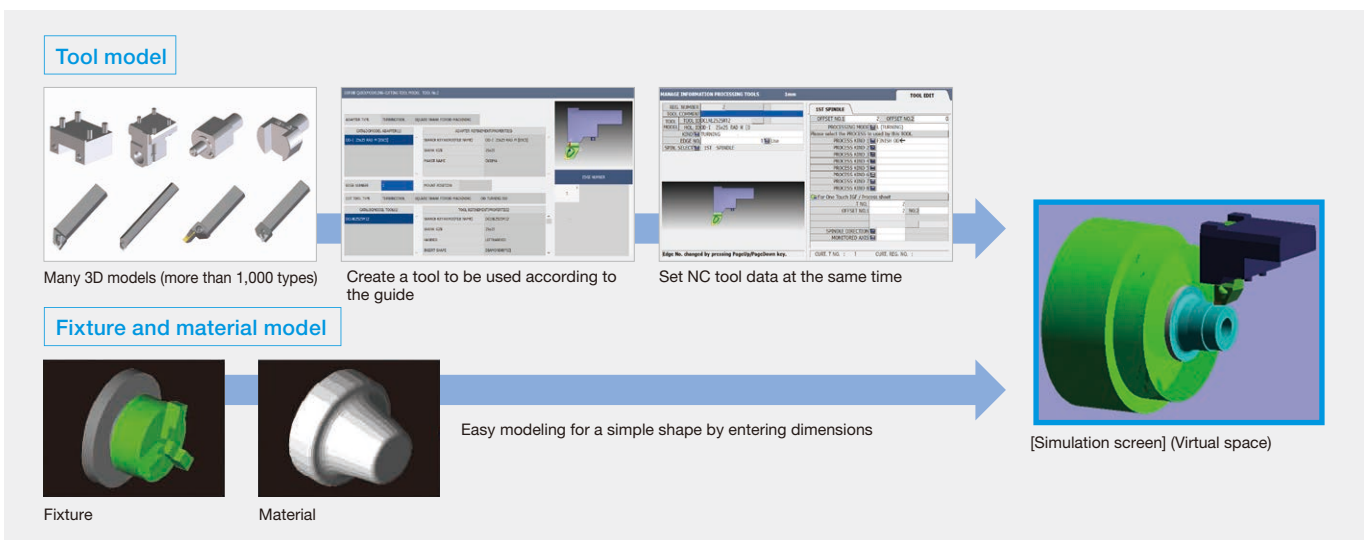

OSP-P500 A next-generation CNC that makes customer manufacturing DX (digital transformation) a reality

2 Easily create high-productivity programs — no programming knowledge required



Smart OSP Operation option

Innovative operability

Conventionally, machining operations are programmed with G-/M-code based on drawings. With OSP-P500, however, you only have to follow the guidance to enter drawing information. So you can prepare for machining quickly, even if you have no familiarity at all with the NC program language.

Programs can be created intuitively through interactive operation without using G-/M-codes


Simply following the guide and entering drawing information automatically creates a machining process. For example, in the case of tapping, three machining processes - center hole, drilling, and tapping - are generated all at once.

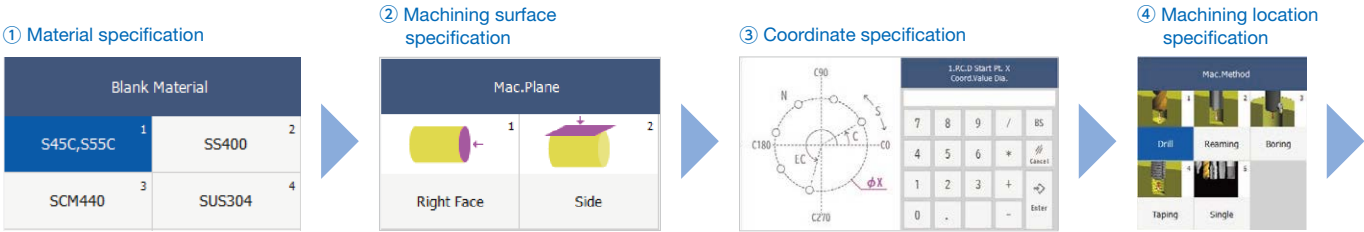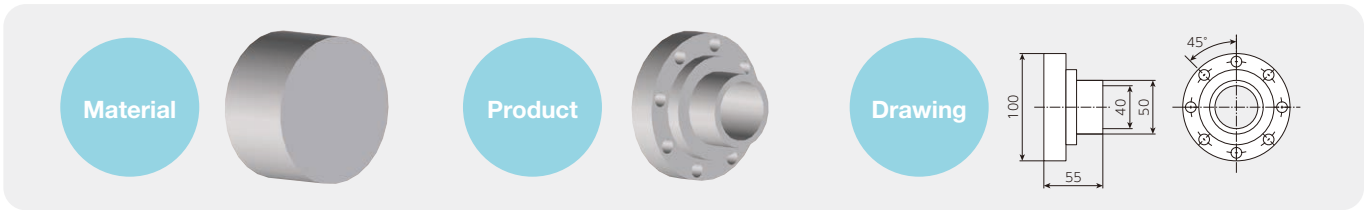

5 Machining units are automatically expanded and machining conditions are automatically output.

Mac.Unit	TK	Turret No.	Dia.	E	O1	O2	Mac.Movement	Rot.	Spd.	FEED/rev	Dep.	Dep. 1	Dep. 2	Option
1.Center DrillC<		1	4. 000	1					2502	31	0. 024	2. 500		
2.DrillC<		2	6. 900	2					1442	31	0. 021	17. 081	1. 380	6. 900
3.TapC<		3	2. 000	3					784	5	0. 400	16. 200		

High-productivity programs that utilize your know-how are easy to create

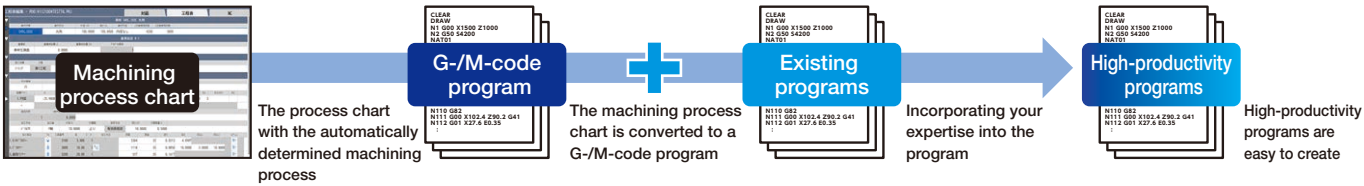

3 Realizing high-speed and high-accuracy machining

Revolutionary control technology

CNC operation performance has been doubled compared to the conventional model (OSP-P300A). The processing capacity and the response speed between control modules have been improved to shorten the machining time. The time for machining general parts can be shortened if the machining program and machining conditions are the same as before.

4 Protecting the operation of machines and precious assets such as part programs from cyber attacks

Robust security that increases cyber resilience

As digital networks develop and servers are increasingly connected to factory machines, the threat of cyber attacks increases, making it ever more important to protect against them. OSP-P500 is equipped with robust security functions for defense against and protection from cyber attacks, along with data restoration, to protect the operation of machines and precious assets such as part programs in the event of a cyber attack.

Defense	Prevent unauthorized access and connection	Identification of operators and communications, authentication function, etc.
Protection	Control damage	Anti-virus measures based on the allowlist, functions to prevent falsification and detect abnormalities, etc.
Data restoration	Preparation for emergencies	Control software and data backup function, etc.



OSP-VPSII (Virus Protection System II)

OSP-VPSII (Virus Protection System II) incorporates allowlisting**1 antivirus functions into the Okuma CNC (OSP) to prevent infection by viruses via networks and USB devices.

OSP-VPSII-STD

OSP-VPSII-STD [Standard] includes antivirus functions developed exclusively for Okuma's numerically controlled machines. Machines can be used safely, as only software tested by Okuma can be run.

Note: Because the allowlist is locked, only Okuma software can be run.

OSP-VPSII-EX (option)

OSP-VPSII-EX [Expert] includes antivirus functions made by TXOne Networks**2. The allowlist can be edited by the customer, so any software can be installed**3.

Note: Incorrectly editing the allowlist may prevent OSP from operating normally, so specialized knowledge of allowlisting antivirus functions is required.

*1. Allowlisting is a method in which safe software is listed and software not included in the list is prevented from running.
*2. TXOne Networks is a registered trademark of TXOne Networks Inc.
*3. This does not guarantee the operation of any software on OSP. Note that installed software may prevent OSP from operating properly.


Connect Plan

Get Connected, Get Started, and Get Innovative with Okuma "Monozukuri"

option

Connect, Visualize, Improve

Okuma's Connect Plan is a system that provides analytics for improved utilization by connecting machine tools and visual control of factory operation results and machining records. Simply connect the OSP and a PC and install Connect Plan on the PC to see the machine operation status from the shop floor, from an office, from anywhere. The Connect Plan is an ideal solution for customers trying to raise their machine utilization.

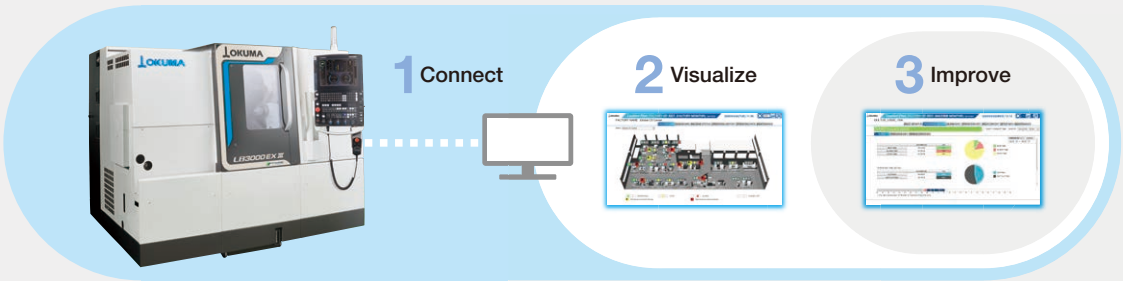

Energy-saving technology

Energy-saving solutions that reduce environmental impact

ECO suite plus

A system for an energy-saving society

The “ECO suite plus” retains the concept of achieving both high machining accuracy stability and energy savings (less carbon dioxide emissions) achieved by the Thermo-Friendly Concept and the “ECO suite” that was put into practical use in 2014. It is an energy-saving system with enhanced high-accuracy/-productive functionality and advanced eco-friendly support.

Actively turn off unnecessary peripherals

ECO Idling Stop

All auxiliary equipment when not needed (most of factory power consumption), can be turned off. The ECO Idling Stop button enables diligent idle stop operations even during machining and maintenance work. With ECO suite plus, the machine automatically detects the operating status, eliminating the need to push buttons while reducing carbon dioxide emission as much as possible without operator awareness.

Peripheral equipment runs only when needed

ECO Operation

By using only the required peripherals (chip conveyor, mist collector), energy-saving operations that also maintain high productivity are possible. ECO suite plus enables more detailed tuning of operations to thoroughly support carbon dioxide emission reduction activities that do not reduce productivity.

ECO PARAMETER		ECO IDLE STOP (114)		ECO OPERATION	
ECO IDLE STOP ELAPSED TIME		000:00:00		REMAINING TIME UNTIL ECO IDLE STOP READY	
				12:45	
Chip conveyor interval control		PARAMETER		UNIT	
Chip conveyor interval:active time		OFF		[min]	
Chip conveyor interval:suspended time		100		[min]	
		200		[min]	


Confirming energy savings and analyzing reductions

ECO Power Monitor

Making it possible for the OSP control to analyze the operating status of each device. The decarbonization cycle on the shop floor is supported through the three phases, 1. View, 2. Record, and 3. Analyze.

1 Check carbon dioxide emissions on the spot

With ECO suite plus, you can also check the power consumption of each device.



2 Simultaneously records operating status and carbon dioxide emissions


With ECO suite plus, recording carbon dioxide emissions for each device, and data output is possible.



3 Analyze carbon dioxide emissions and improve machine tool operation

With ECO suite plus, not only the display on the machine but data analysis for each device is also possible on a PC, to see a more detailed carbon dioxide emission analysis.

Example of utilizing One-Touch Spreadsheet (option) to creative visual feedback of machine's power consumption and carbon dioxide emissions.

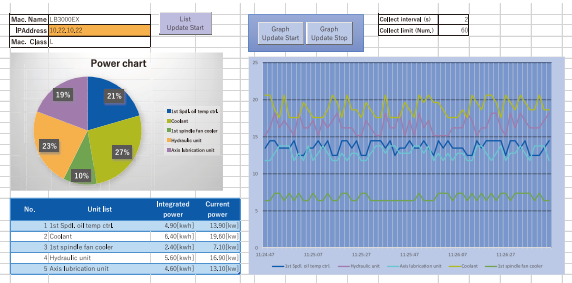

Environmental effects

The product has excellent environmental performance to reduce power consumption and help mitigate climate change (decarbonization)



Achievement of high accuracy and high productivity with emissions reduction and energy saving

Shortening machine operation time to minimize power consumption while maintaining machining accuracy

High accuracy and high productivity

Thermo-Friendly Concept

The Okuma Intelligent Technology that enables machines to autonomously maintain high accuracy stability

Daily warm-ups, dimensional compensations **68 min → 3 min**

LB2000 EX III

Yearly: **0.4 t-CO₂/unit Less**

LB3000 EX III

Yearly: **0.6 t-CO₂/unit Less**

LB4000 EX III

Yearly: **0.7 t-CO₂/unit Less**

Shorter warm-up and dimensional compensation times. Note: Comparing a conventional machine with a lathe of the same size



Emissions reduction and energy saving

ECO suite plus


A system for an energy-saving society

Further reductions in carbon dioxide emissions from energy-saving machine tools

LB2000 EX III
16% Less

LB3000 EX III / LB4000 EX III
15% Less

[Calculations]
60% utilization
(8 hours per day, 220 days per year)
Assuming 68% of non-operation time used ECO Idling Stop

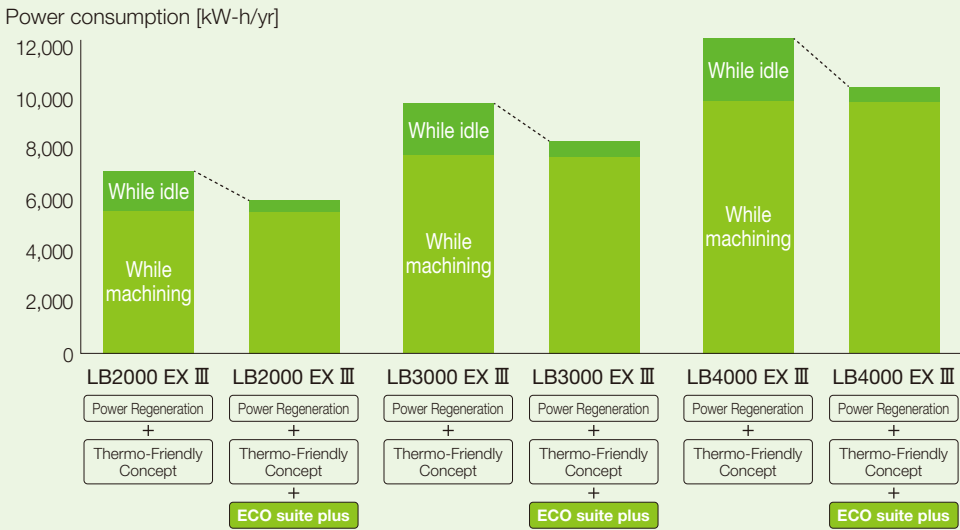

Machine Specifications

			LB2000 EX Ⅲ (L)			LB2000 EX Ⅲ (M)		
			T	C × 300	C × 500	T	C × 300	C × 500
Capacity	Swing over bed	mm (in)	ø580 (ø22.83)					
	Swing over saddle	mm (in)	ø470 (ø18.50)					
	Distance between centers (W specs: DBN)	mm (in)	—	300 (11.81)	540 (21.26)	—	300 (11.81)	540 (21.26)
	Max turning dia	mm (in)	ø430 (ø16.93)			ø360 (ø14.17)		
	Max work length	mm (in)	150 (5.91)	300 (11.81)	500 (19.69)	150 (5.91)	300 (11.81)	500 (19.69)
Travels	X-axis	mm (in)	260 (10.24)					
	Z-axis	mm (in)	390 (15.35)		565 (22.24)	390 (15.35)		565 (22.24)
	Y-axis	mm (in)	—					
	W-axis	mm (in)	—					
	C-axis (minimum control angle)	deg	—			360 (0.001)		
Spindle	Speed	min ⁻¹	50 to 6,000 {45 to 5,000}					
	Speed ranges		Infinitely variable × 2 auto ranges (2 range motor coil switching)					
	Nose shape		ø140 flat {JIS A2-6}					
	Bore dia	mm (in)	ø62 {ø80} (ø2.44 {ø3.15})					
	Front bearing dia	mm (in)	ø100 {ø120} (ø3.94 {ø4.72})					
Sub spindle	Speed	min ⁻¹	—					
	Speed ranges		—					
	Nose shape		—					
	Bore dia	mm (in)	—					
	Front bearing dia	mm (in)	—					
Turret	Type		V12			M-V12		
	No. of tools		L: 12			L / M: 12		
	OD tool shank	mm (in)	□20 (3/4 × 3/4)					
	ID tool shank dia	mm (in)	ø32 (ø1-1/4)					
	Turret index time	sec/index	0.1					
Milling tool	Spindle speed	min ⁻¹	—			45 to 6,000		
	Speed range		—			Infinitely variable		
Feed rates	Rapid traverse	m/min (ipm)	X: 30, Z: 30 (X: 1,181, Z: 1,181)					
	Tailstock rapids	m/min (ipm)	—	12 (472)		—	12 (472)	
	Rapid traverse (W)	m/min (ipm)	—					
	Rapid traverse (C)	min ⁻¹	—			200		
Tailstock	Tapered bore type		—	MT No. 4 (revolving center)		—	MT No. 4 (revolving center)	
	Travels	mm (in)	—	415 (16.34)	515 (20.28)	—	415 (16.34)	515 (20.28)
Motors	Main spindle	kW (hp)	11/7.5 (15/10) (20 min/cont) [15/11 (20/15) (15 min/cont)] [22/15 (30/20) (30 min/cont)]					
	Sub-spindle	kW (hp)	—					
	Milling tool spindle	kW (hp)	—			5.5/3.7 (7.5/5) (2 min/cont) [7.1/4.1 (9.5/5.5) (25 min/cont)]		
	Axis drive	kW (hp)	X: 2.8, Z: 3.5 (X: 3.7, Z: 4.7)					
	Tailstock travel	kW (hp)	—	2.9 (3.9)		—	2.9 (3.9)	
	Sub-spindle travel	kW (hp)	—					
	Coolant pump (50/60 Hz)	kW (hp)	SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)					
Machine size	Height	mm (in)	1,770 (69.69)					
	Floor space*1 (side discharge L type tank)	mm (in)	2,374 × 1,899 (93.46 × 74.76)		2,714 × 1,899 (106.85 × 74.76)	2,374 × 1,899 (93.46 × 74.76)		2,714 × 1,899 (106.85 × 74.76)
	Floor space*1 (side discharge I type tank)	mm (in)	1,980 × 1,899 (77.95 × 74.76)		2,290 × 1,899 (90.16 × 74.76)	1,980 × 1,899 (77.95 × 74.76)		2,290 × 1,899 (90.16 × 74.76)
	Mass (w/ CNC)	kg (lb)	3,250 (7,150)	3,400 (7,480)	4,300 (9,460)	3,350 (7,370)	3,500 (7,700)	4,400 (9,680)
CNC		OSP-P500L						

SD: side discharge, RD: rear discharge, DBN: Distance between noses

LB2000 EX Ⅲ (MY)			LB2000 EX Ⅲ (W)	LB2000 EX Ⅲ (MW)	LB2000 EX Ⅲ (MYW)
T	C × 250	C × 450	W × 500	W × 500	W × 450
ø580 (ø22.83)					
ø470 (ø18.50)					
—	250 (9.84)	490 (19.29)	791 (31.14)		
ø360 (ø14.17)			ø430 (ø16.93)	ø360 (ø14.17)	
150 (5.91)	250 (9.84)	450 (17.72)	—		
260 (10.24)					
356 (14.02)		510 (20.08)	565 (22.24)	550 (21.65)	
100 (+50 to -50) (3.94 (+1.97 to -1.97))		120 (+70 to -50) (4.72 (+2.76 to -1.97))	—	115 (+70 to -45) (4.53 (+2.76 to -1.77))	
—			595 (23.43)		
360 (0.001)			—	360 (0.001)	
50 to 6,000 {45 to 5,000}					
Infinitely variable × 2 auto ranges (2 range motor coil switching)					
ø140 flat {JIS A2-6}					
ø62 {ø80} (ø2.44 {ø3.15})					
ø100 {ø120} (ø3.94 {ø4.72})					
—			50 to 6,000		
—			Infinitely variable × 2 auto ranges (2 range motor coil switching)		
—			ø140 flat		
—			ø62 (ø2.44)		
—			ø100 (ø3.94)		
M-V12			V12	M-V12	
L / M: 12			L: 12	L / M: 12	
□20 (3/4 × 3/4)					
ø32 (ø1-1/4)					
0.1					
45 to 6,000			—	45 to 6,000	
Infinitely variable			—	Infinitely variable	
X: 30, Z: 30, Y: 15 (X: 1,181, Z: 1,181, Y: 591)			X: 30, Z: 30 (X: 1,181, Z: 1,181)		X: 30, Z: 30, Y: 15 (X: 1,181, Z: 1,181, Y: 591)
—	12 (472)		—		
—			30 (1,181)		
200			—	200	
—	MT No. 4 (revolving center)		—		
—	415 (16.34)	515 (20.28)	—		
11/7.5 (15/10) (20 min/cont) [15/11 (20/15) (15 min/cont)] [22/15 (30/20) (30 min/cont)]					
—			11/7.5 (15/10) (20 min/cont)		
5.5/3.7 (7.5/5) (2 min/cont) [7.1/4.1 (9.5/5.5) (25 min/cont)]			—	5.5/3.7 (7.5/5) (2 min/cont) [7.1/4.1 (9.5/5.5) (25 min/cont)]	
X: 3.5, Z: 4.6, Y: 3.5 (X: 4.7, Z: 6.1, Y: 4.7)			X: 2.8, Z: 3.5 (X: 3.7, Z: 4.7)		X: 3.5, Z: 4.6, Y: 3.5 (X: 4.7, Z: 6.1, Y: 4.7)
—	2.9 (3.9)		—		
—			2.8 (3.7)		
SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)					
2,250 (88.58)			1,770 (69.69)		2,250 (88.58)
2,374 × 1,899 (93.46 × 74.76)		2,714 × 1,899 (106.85 × 74.76)	3,164 × 1,959 (124.57 × 77.13)		3,274 × 1,959 (128.90 × 77.13)
2,020 × 1,899 (79.53 × 74.76)		2,290 × 1,899 (90.16 × 74.76)	2,740 × 1,959 (107.87 × 77.13)		2,850 × 1,959 (112.20 × 77.13)
4,050 (8,910)	4,200 (9,240)	4,900 (10,780)	4,550 (10,010)	4,650 (10,230)	5,150 (11,330)
OSP-P500L					

[]: High power spindle specs { }: Big-Bore spindle specs
*1. Standard spindle, chip conveyor side discharge specs; including tank

Machine Specifications

			LB3000 EX III (L)					
			T × 250	C × 250	T × 500	C × 500	C × 1000	C × 1300
Capacity	Swing over bed	mm (in)	ø580 (ø22.83)					
	Swing over saddle	mm (in)	ø470 (ø18.50)					
	Distance between centers (W specs: DBN)	mm (in)	—	270 (10.63)	—	520 (20.47)	1,020 (40.16)	1,335 (52.56)
	Max turning dia	mm (in)	ø410 (ø16.14)					
	Max work length	mm (in)	150 (5.91)	250 (9.84)	250 (9.84)	500 (19.69)	1,000 (39.37)	1,300 (51.18)
Travels	X-axis	mm (in)	260 (10.24)					
	Z-axis	mm (in)	390 (15.35)		565 (22.24)		1,065 (41.93)	1,380 (54.33)
	Y-axis	mm (in)	—					
	W-axis	mm (in)	—					
	C-axis (minimum control angle)	deg	—					
Spindle	Speed	min ⁻¹	45 to 5,000 {42 to 4,200} <30 to 3,000>*1					
	Speed ranges		2 auto ranges (2 range motor coil switching)					
	Nose shape		JIS A2-6 {JIS A2-8} <JIS A2-11>*1					
	Bore dia	mm (in)	ø80 {ø91} <ø110> {ø3.15 {ø3.58} <ø4.33>)*1					
	Front bearing dia	mm (in)	ø120 {ø140} <ø150> {ø4.72 {ø5.51} <ø5.91>)*1					
Sub spindle	Speed	min ⁻¹	—					
	Speed ranges		—					
	Nose shape		—					
	Bore dia	mm (in)	—					
	Front bearing dia	mm (in)	—					
Turret	Type		V12					
	No. of tools		12 tools					
	OD tool shank	mm (in)	□25 (1 × 1)					
	ID tool shank dia	mm (in)	ø40 (ø1-1/2)					
	Turret index time	sec/index	0.1					
Milling tool	Spindle speed	min ⁻¹	—					
	Speed range		—					
Feed rates	Rapid traverse	m/min (ipm)	X: 30, Z: 30 {X: 1,181, Z: 1,181}					
	Tailstock rapids	m/min (ipm)	—	12 (472)	—	12 (472)		
	Rapid traverse (W)	m/min (ipm)	—					
	Rapid traverse (C)	min ⁻¹	—					
Tailstock	Tapered bore type		—	MT No. 4 (revolving center)	—	MT No. 5 (revolving center)		
	Travels	mm (in)	—	415 (16.34)	—	515 (20.28)	1,015 (39.96)	1,330 (52.36)
Motors	Main spindle (30 min/cont)	kW (hp)	22/15 (30/20) [30/22 (40/30)] {30/22 (40/30)} <22/15 (30/20)>*1					
	Sub-spindle	kW (hp)	—					
	Milling tool spindle	kW (hp)	—					
	Axis drive	kW (hp)	X: 2.8, Z: 3.5 {X: 3.7, Z: 4.7}					
	Tailstock travel	kW (hp)	2.9 (3.9)					
	Sub-spindle travel	kW (hp)	—					
	Coolant pump (50/60 Hz)	kW (hp)	SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)					SD: 0.55/0.75 (0.73/1.00)
Machine size	Height	mm (in)	1,770 (69.69)				1,820 (71.65)	
	Floor space*2 (side discharge L type tank)	mm (in)	2,449 × 1,899 (96.42 × 74.76)		2,764 × 1,899 (108.82 × 74.76)		3,844 × 2,083 (151.34 × 82.01)	4,344 × 2,083 (171.02 × 82.01)
	Floor space*2 (side discharge I type tank)	mm (in)	2,055 × 1,899 (80.91 × 74.76)		2,340 × 1,899 (92.13 × 74.76)		3,420 × 2,083 (134.65 × 82.01)	—
	Mass (w/ CNC)	kg (lb)	3,350 (7,370)	3,500 (7,700)	4,250 (9,350)	4,400 (9,680)	6,000 (13,200)	6,700 (14,740)
CNC		OSP-P500L						

SD: side discharge, RD: rear discharge, DBN: Distance between noses

LB3000 EX III (M)					
T × 250	C × 250	T × 500	C × 500	C × 1000	C × 1300
ø580 (ø22.83)					
ø470 (ø18.50)					
—	270 (10.63)	—	520 (20.47)	1,020 (40.16)	1,335 (52.56)
ø340 (ø13.39)					
150 (5.91)	250 (9.84)	250 (9.84)	500 (19.69)	1,000 (39.37)	1,300 (51.18)
260 (10.24)					
390 (15.35)		565 (22.24)		1,065 (41.93)	1,380 (54.33)
—					
—					
360 (0.001)					
45 to 5,000 {42 to 4,200} <30 to 3,000>*1					
2 auto ranges (2 range motor coil switching)					
JIS A2-6 {JIS A2-8} <JIS A2-11>*1					
ø80 {ø91} <ø110> {ø3.15 {ø3.58} <ø4.33>)*1					
ø120 {ø140} <ø150> {ø4.72 {ø5.51} <ø5.91>)*1					
—					
—					
—					
—					
—					
M-V12					
L / M: 12					
□25 (1 × 1)					
ø40 (ø1-1/2)					
0.1					
45 to 6,000					
Infinitely variable					
X: 30, Z: 30 (X: 1,181, Z: 1,181)					
—	12 (472)	—	12 (472)		
—					
200					
—	MT No. 4 (revolving center)	—	MT No. 5 (revolving center)		
—	415 (16.34)	—	515 (20.28)	1,015 (39.96)	1,330 (52.36)
22/15 (30/20) [30/22 (40/30)] {30/22 (40/30)} <22/15 (30/20)>*1					
—					
7.1/4.1 (9.5/5.5) (25 min/cont)					
X: 2.8, Z: 3.5 (X: 3.7, Z: 4.7)					
2.9 (3.9)					
—					
SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)					SD: 0.55/0.75 (0.73/1.00)
1,770 (69.69)			1,820 (71.65)		
2,449 × 1,899 (96.42 × 74.76)		2,764 × 1,899 (108.82 × 74.76)		3,844 × 2,083 (151.34 × 82.01)	4,344 × 2,083 (171.02 × 82.01)
2,055 × 1,899 (80.91 × 74.76)		2,340 × 1,899 (92.13 × 74.76)		3,420 × 2,083 (134.65 × 82.01)	—
3,450 (7,590)	3,600 (7,920)	4,350 (9,570)	4,500 (9,900)	6,100 (13,420)	6,800 (14,960)
OSP-P500L					

[]: High power spindle specs { } : Big-Bore spindle specs < >: Super Big-Bore spindle specs

*1. For 250 DBC, Big-Bore spindle specs and Super Big-Bore spindle specs cannot be selected

*2. Standard spindle, chip conveyor side discharge specs; including tank

Machine Specifications

			LB3000 EX III (MY)					
			T × 200	C × 200	T × 450	C × 450	C × 950	C × 1200
Capacity	Swing over bed	mm (in)	ø580 (ø22.83)					
	Swing over saddle	mm (in)	ø470 (ø18.50)					
	Distance between centers (W specs: DBN)	mm (in)	—	220 (8.66)	—	470 (18.50)	970 (38.19)	1,220 (48.03)
	Max turning dia	mm (in)	ø340 (ø13.39)					
	Max work length	mm (in)	150 (5.91)	200 (7.87)	250 (9.84)	450 (17.72)	950 (37.40)	1,200 (47.24)
Travels	X-axis	mm (in)	260 (10.24)					
	Z-axis	mm (in)	356 (14.02)		510 (20.08)		1,010 (39.76)	1,255 (49.41)
	Y-axis	mm (in)	120(+70 to -50) (4.72 (+2.76 to -1.97))					
	W-axis	mm (in)	—					
	C-axis (minimum control angle)	deg	360 (0.001)					
Spindle	Speed	min ⁻¹	45 to 5,000 {42 to 4,200} {30 to 3,000}*1					
	Speed ranges		2 auto ranges (2 range motor coil switching)					
	Nose shape		JIS A2-6 {JIS A2-8} {JIS A2-11}*1					
	Bore dia	mm (in)	ø80 {ø91} {ø110} {ø3.15 {ø3.58} {ø4.33}}*1					
	Front bearing dia	mm (in)	ø120 {ø140} {ø150} {ø4.72 {ø5.51} {ø5.91}}*1					
Sub spindle	Speed	min ⁻¹	—					
	Speed ranges		—					
	Nose shape		—					
	Bore dia	mm (in)	—					
	Front bearing dia	mm (in)	—					
Turret	Type		M-V12					
	No. of tools		L / M: 12					
	OD tool shank	mm (in)	□25 (1 × 1)					
	ID tool shank dia	mm (in)	ø40 (ø1-1/2)					
	Turret index time	sec/index	0.1					
Milling tool	Spindle speed	min ⁻¹	45 to 6,000					
	Speed range		Infinitely variable					
Feed rates	Rapid traverse	m/min (ipm)	X: 30, Z: 30, Y: 15 (X: 1,181, Z: 1,181, Y: 591)					
	Tailstock rapids	m/min (ipm)	—	12 (472)	—	12 (472)		
	Rapid traverse (W)	m/min (ipm)	—					
	Rapid traverse (C)	min ⁻¹	200					
Tailstock	Tapered bore type		—	MT No. 4 (revolving center)	—	MT No. 5 (revolving center)		
	Travels	mm (in)	—	415 (16.34)	—	515 (20.28)	1,015 (39.96)	1,330 (52.36)
Motors	Main spindle (30 min/cont)	kW (hp)	22/15 (30/20) [30/22 (40/30)] {30/22 (40/30)} {22/15 (30/20)}*1					
	Sub-spindle	kW (hp)	—					
	Milling tool spindle	kW (hp)	7.1/4.1 (9.5/5.5) (25 min/cont)					
	Axis drive	kW (hp)	X: 3.5, Z: 4.6, Y: 3.5 (X: 4.7, Z: 6.1, Y: 4.7)					
	Tailstock travel	kW (hp)	2.9 (3.9)					
	Sub-spindle travel	kW (hp)	—					
	Coolant pump (50/60 Hz)	kW (hp)	SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)					RD: 0.55/0.75 (0.73/1.00)
Machine size	Height	mm (in)	2,250 (88.58)				2,300 (90.55)	
	Floor space*2 (side discharge L type tank)	mm (in)	2,449 × 1,899 (96.42 × 74.76)		2,764 × 1,899 (108.82 × 74.76)		3,844 × 2,083 (151.34 × 82.01)	4,344 × 2,083 (171.02 × 82.01)
	Floor space*2 (side discharge I type tank)	mm (in)	2,055 × 1,899 (80.91 × 74.76)		2,340 × 1,899 (92.13 × 74.76)		3,420 × 2,083 (134.65 × 82.01)	—
	Mass (w/ CNC)	kg (lb)	4,150 (9,130)	4,300 (9,460)	4,850 (10,670)	5,000 (11,000)	6,600 (14,520)	7,400 (16,280)
CNC		OSP-P500L						

SD: side discharge, RD: rear discharge, DBN: Distance between noses

LB3000 EX Ⅲ (W)		LB3000 EX Ⅲ (MW)		LB3000 EX Ⅲ (MYW)	
W × 500	W × 800	W × 500	W × 800	W × 450	W × 800
ø580 (ø22.83)					
ø470 (ø18.50)					
785 (30.91)	1,085 (42.72)	785 (30.91)	1,085 (42.72)	785 (30.91)	1,085 (42.72)
ø410 (ø16.14)		ø340 (ø13.39)			
—					
260 (10.24)					
565 (22.24)	1,065 (41.93)	550 (21.65)	995 (39.17)	510 (20.08)	1,010 (39.76)
—				115 (+70 to -45) (4.53 (+2.76 to -1.77))	
595 (23.43)	825 (32.48)	595 (23.43)	825 (32.48)	595 (23.43)	825 (32.48)
—		360 (0.001)			
45 to 5,000 {42 to 4,200} <30 to 3,000>					
2 auto ranges (2 range motor coil switching)					
JIS A2-6 {JIS A2-8} <JIS A2-11>					
ø80 {ø91} <ø110> {ø3.15 {ø3.58} <ø4.33>}					
ø120 {ø140} <ø150> {ø4.72 {ø5.51} <ø5.91>}					
50 to 6,000					
2 auto ranges (2 range motor coil switching)					
ø140 flat					
ø62 (ø2.44)					
ø100 (ø3.94)					
V12		M-V12			
L: 12		L / M: 12			
□25 (1 × 1)					
ø40 (ø1-1/2)					
0.1					
—		45 to 6,000			
—		Infinitely variable			
X: 30, Z: 30 (X: 1,181, Z: 1,181)				X: 30, Z: 30, Y: 15 (X: 1,181, Z: 1,181, Y: 591)	
—					
30 (1,181)					
—		200			
—					
—					
22/15 (30/20) [30/22 (40/30)] {30/22 (40/30)} <22/15 (30/20)>					
11/7.5 (15/10) (20 min/cont)					
—		7.1/4.1 (9.5/5.5) (25 min/cont)			
X: 2.8, Z: 3.5 (X: 3.7, Z: 4.7)				X: 3.5, Z: 4.6, Y: 3.5 (X: 4.7, Z: 6.1, Y: 4.7)	
—					
2.8 (3.7)					
SD: 0.25/0.25 (0.33/0.33)					
RD: 0.55/0.75 (0.73/1.00)					
1,770 (69.69)	1,820 (71.65)	1,770 (69.69)	1,820 (71.65)	2,250 (88.58)	2,300 (90.55)
3,164 ×1,959 (124.57 × 77.13)	3,844 × 2,083 (151.34 × 82.01)	3,164 ×1,959 (124.57 × 77.13)	3,844 × 2,083 (151.34 × 82.01)	3,274 × 1,959 (128.90 × 77.13)	3,844 × 2,083 (151.34 × 82.01)
2,740 × 1,959 (107.87 × 77.13)	3,420 × 2,083 (134.65 × 82.01)	2,740 × 1,959 (107.87 × 77.13)	3,420 × 2,083 (134.65 × 82.01)	2,850 × 1,959 (112.20 × 77.13)	3,420 × 2,083 (134.65 × 82.01)
4,650 (10,230)	6,250 (13,750)	4,750 (10,450)	6,350 (13,970)	5,250 (11,550)	6,850 (15,070)
OSP-P500L					

[]: High power spindle specs { } : Big-Bore spindle specs < >: Super Big-Bore spindle specs

*1. For 200 DBC, Big-Bore spindle specs and Super Big-Bore spindle specs cannot be selected

*2. Standard spindle, chip conveyor side discharge specs; including tank

Machine Specifications

			LB4000 EX Ⅲ (L)				LB4000 EX Ⅲ (M)			
			T	C × 750	C × 1500	C × 2000	T	C × 750	C × 1500	C × 2000
Capacity	Swing over bed	mm (in)	ø670 (ø26.38)							
	Swing over saddle	mm (in)	ø480 (ø18.90)							
	Distance between centers (W specs: DBN)	mm (in)	—	770 (30.31)	1,520 (59.84)	2,170 (85.43)	—	770 (30.31)	1,520 (59.84)	2,170 (85.43)
	Max turning dia	mm (in)	ø480 (ø18.90)				ø430 (ø16.93)			
	Max work length	mm (in)	380 (14.96)	750 (29.53)	1,500 (59.06)	2,150 (84.65)	380 (14.96)	750 (29.53)	1,500 (59.06)	2,150 (84.65)
Travels	X-axis	mm (in)	300 (11.81)							
	Z-axis	mm (in)	840 (33.07)		1,590 (62.60)	2,240 (88.19)	840 (33.07)		1,590 (62.60)	2,240 (88.19)
	Y-axis	mm (in)	—							
	W-axis	mm (in)	—							
	C-axis (minimum control angle)	deg	—				360 (0.001)			
Spindle	Speed	min ⁻¹	42 to 4,200 {30 to 3,000} <12 to 1,400>							
	Speed ranges		2 auto ranges (2 range motor coil switching) <Infinitely variable>							
	Nose shape		JIS A2-8 {JIS A2-11} <JIS A2-15>							
	Bore dia	mm (in)	ø91 {ø112} <ø185> {ø3.58 {ø4.41} <ø7.28>}							
	Front bearing dia	mm (in)	ø140 {ø160} <ø240> {ø5.51 {ø6.30} <ø9.45>}							
Sub spindle	Speed	min ⁻¹	—							
	Speed ranges		—							
	Nose shape		—							
	Bore dia	mm (in)	—							
	Front bearing dia	mm (in)	—							
Turret	Type		V12				M-V12			
	No. of tools		L: 12				L / M: 12			
	OD tool shank	mm (in)	□25 (1 × 1)							
	ID tool shank dia	mm (in)	ø40 (ø1-1/2)							
	Turret index time	sec/index	0.2							
Milling tool	Spindle speed	min ⁻¹	—				45 to 6,000			
	Speed range		—				Infinitely variable			
Feed rates	Rapid traverse	m/min (ipm)	X: 30, Z: 30 {X: 1,181, Z: 1,181}							
	Tailstock rapids	m/min (ipm)	—	12 (472)			—	12 (472)		
	Rapid traverse (W)	m/min (ipm)	—							
	Rapid traverse (C)	min ⁻¹	—				200			
Tailstock	Tapered bore type		—	MT No. 5 (revolving center)			—	MT No. 5 (revolving center)		
	Travels	mm (in)	—	780 (30.71)	1,530 (60.24)	2,180 (85.83)	—	780 (30.71)	1,530 (60.24)	2,180 (85.83)
Motors	Main spindle (30 min/cont)	kW (hp)	30/22 (40/30) {37/30 (50/40)} <37/30 (50/40)>							
	Sub-spindle	kW (hp)	—							
	Milling tool spindle	kW (hp)	—				7.5/4.3 (10/5.7) (25 min/cont)			
	Axis drive	kW (hp)	X: 3.5, Z: 4.6 {X: 4.7, Z: 6.1}							
	Tailstock travel	kW (hp)	—	2.9 (3.9)			—	2.9 (3.9)		
	Sub-spindle travel	kW (hp)	—							
	Coolant pump (50/60 Hz)	kW (hp)	SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)	SD: 0.25/0.25 (0.33/0.33)	SD: 0.55/0.75 (0.73/1.00)	SD: 0.25/0.75 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)	SD: 0.25/0.25 (0.33/0.33)	SD: 0.25/0.25 (0.33/0.33)	SD: 0.55/0.75 (0.73/1.00)	
Machine size	Height	mm (in)	1,955 (76.97)		2,025 (79.72)	2,025 (79.72)	1,955 (76.97)		2,025 (79.72)	2,025 (79.72)
	Floor space*1 (side discharge L type tank)	mm (in)	3,534 × 2,059 (139.13 × 81.06)		4,549 × 2,249 (179.09 × 88.54)	5,855 × 2,530 (230.51 × 99.61)	3,534 × 2,059 (139.13 × 81.06)		4,549 × 2,249 (179.09 × 88.54)	5,855 × 2,530 (230.51 × 99.61)
	Floor space*1 (side discharge I type tank)	mm (in)	3,100 × 2,059 (122.05 × 81.06)		4,175 × 2,249 (164.37 × 88.54)	5,515 × 2,530 (217.13 × 99.61)	3,100 × 2,059 (122.05 × 81.06)		4,175 × 2,249 (164.37 × 88.54)	5,515 × 2,530 (217.13 × 99.61)
	Mass (w/ CNC)	kg (lb)	6,000 (13,200)	6,300 (13,860)	8,200 (18,040)	11,000 (24,200)	6,100 (13,420)	6,400 (14,080)	8,200 (18,040)	11,000 (24,200)
CNC			OSP-P500L							

SD: side discharge, RD: rear discharge, DBN: Distance between noses

LB4000 EX Ⅲ (MY)				LB4000 EX Ⅲ (MW)	LB4000 EX Ⅲ (MYW)
T	C × 750	C × 1500	C × 2000	W × 720	W × 720
ø670 (ø26.38)					
ø480 (ø18.90)					
—	770 (30.31)	1,520 (59.84)	2,170 (85.43)	1,098 (43.23)	
ø430 (ø16.93)					
380 (14.96)	750 (29.53)	1,500 (59.06)	2,150 (84.65)	—	
300 (11.81)					
840 (33.07)		1,590 (62.60)	2,240 (88.19)	840 (33.07)	
140 (+70 to -70) (5.51 (+2.76 to -2.76))				—	140 (+70 to -70) (5.51 (+2.76 to -2.76))
—				800 (31.50)	
360 (0.001)					
42 to 4,200 {30 to 3,000} <12 to 1,400>					
2 auto ranges (2 range motor coil switching) <Infinitely variable>					
JIS A2-8 {JIS A2-11} <JIS A2-15>					
ø91 {ø112} <ø185> {ø3.58 {ø4.41} <ø7.28>}					
ø140 {ø160} <ø240> {ø5.51 {ø6.30} <ø9.45>}					
—				50 to 5,000	
—				2 auto ranges (2 range motor coil switching)	
—				JIS A2-6	
—				ø80 {ø3.15}	
—				ø120 {ø4.72}	
M-V12					
L / M: 12					
□25 (1 × 1)					
ø40 {ø1-1/2}					
0.2					
45 to 6,000					
Infinitely variable					
X: 30, Z: 30, Y: 15 {X: 1,181, Z: 1,181, Y: 591}				X: 30, Z: 30 {X: 1,181, Z: 1,181}	X: 30, Z: 30, Y: 15 {X: 1,181, Z: 1,181, Y: 591}
—	12 (472)			—	
—				30 (1,181)	
200					
—	MT No. 5 (revolving center)			—	
—	780 (30.71)	1,530 (60.24)	2,180 (85.83)	—	
30/22 (40/30) {37/30 (50/40)} <37/30 (50/40)>					
—				22/15 (30/20) (5 min/cont)	
7.5/4.3 (10/5.7) (25 min/cont)					
X: 3.5, Z: 4.6, Y: 3.5 {X: 4.7, Z: 6.1, Y: 4.7}				X: 3.5, Z: 4.6 {X: 4.7, Z: 6.1}	X: 3.5, Z: 4.6, Y: 3.5 {X: 4.7, Z: 6.1, Y: 4.7}
—	2.9 (3.9)			—	
—				3.5 (4.7)	
SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)		SD: 0.25/0.25 (0.33/0.33)	SD: 0.55/0.75 (0.73/1.00)	SD: 0.25/0.25 (0.33/0.33) RD: 0.55/0.75 (0.73/1.00)	
2,320 (91.34)		2,390 (94.09)	2,390 (94.09)	1,955 (76.97)	2,320 (91.34)
3,534 × 2,059 (139.13 × 81.06)		4,549 × 2,249 (179.09 × 88.54)	5,855 × 2,530 (230.51 × 99.61)	4,134 × 2,119 (162.76 × 83.43)	4,134 × 2,119 (162.76 × 83.43)
3,110 × 2,059 (122.44 × 81.06)		4,225 × 2,249 (166.34 × 88.54)	5,515 × 2,530 (217.13 × 99.61)	3,700 × 2,119 (145.67 × 83.43)	3,700 × 2,119 (145.67 × 83.43)
6,400 (14,080)	6,700 (14,740)	8,600 (18,920)	12,000 (26,400)	6,800 (14,960)	7,100 (15,620)
OSP-P500L					

{ }: Big-Bore spindle specs < >: Super Big-Bore spindle specs
*1. Standard spindle, chip conveyor side discharge specs; including tank

Standard Specifications & Accessories

	LB2000 EX III								
Specifications	L		M		MY		W	MW	MYW
	T	C	T	C	T	C			
Spindle	ø140 flat 50 to 6,000 min ⁻¹ 11/7.5 kW (20 min/cont)								
Sub spindle	—						ø140 flat 50 to 6,000 min ⁻¹ 11/7.5 kW (20 min/cont)		
Turret	NC indexing								
	V12 bolt clamp		M-V12 radial			V12 bolt clamp		M-V12 radial	
Milling tool	—		45 to 6,000 min ⁻¹ 5.5/3.7 kW (2 min/cont)			—		45 to 6,000 min ⁻¹ 5.5/3.7 kW (2 min/cont)	
Tailstock	—	NC travel Dead MT No. 4	—	NC travel Dead MT No. 4	—	NC travel Dead MT No. 4	—		
Standard accessories	Coolant system (water soluble), Work lamp (LED), Full enclosure shielding, Jack screws, Foundation washers, Hand tools								
Standard Specifications	Door interlock, Lube monitor (A-1) + hydraulic source pressure detector								
	Chuck auto open/close confirm						Chuck auto open/close confirm (main/sub) Chuck air blow (main/sub) Chuck open/close during spindle rotation		
CNC	OSP-P500L								

	LB3000 EX III								
Specifications	L		M		MY		W	MW	MYW
	T	C	T	C	T	C			
Spindle	A2-6 45 to 5,000 min ⁻¹ 22/15 kW (30 min/cont)								
Sub spindle	—						ø140 flat, 50 to 6,000 min ⁻¹ 11/7.5 kW (20 min/cont)		
Turret	NC indexing								
	V12 bolt clamp		M-V12 radial			V12 bolt clamp		M-V12 radial	
Milling tool	—		45 to 6,000 min ⁻¹ 7.1/4.1 kW (25 min/cont)			—		45 to 6,000 min ⁻¹ 7.1/4.1 kW (25 min/cont)	
Tailstock	—	NC travel Dead MT No. 5*	—	NC travel Dead MT No. 5*	—	NC travel Dead MT No. 5*	—		
Standard accessories	Coolant system (water soluble), Work lamp, Full enclosure shielding, Jack screws, Foundation washers, Hand tools								
Standard Specifications	Door interlock, Lube monitor (A-1) + hydraulic source pressure detector								
	Chuck auto open/close confirm					Chuck auto open/close confirm (main/sub) Chuck air blow (main/sub) Chuck open/close during spindle rotation			
CNC	OSP-P500L								

* MT No. 4 in the case of 250 DBC L/M and 200 DBC MY specs.

	LB4000 EX Ⅲ							
Specifications	L		M		MY		MW	MYW
	T	C	T	C	T	C		
Spindle	A2-8 42 to 4,200 min ⁻¹ 30/22 kW (30 min/cont)							
Sub spindle	—						A2-6 50 to 5,000 min ⁻¹ 22/15 kW (5 min/cont)	
Turret	NC indexing							
	V12 bolt clamp		M-V12 radial					
Milling tool	—		45 to 6,000 min ⁻¹ 7.5/4.3 kW (25 min/cont)					
Tailstock	—	NC travel Dead MT No. 5	—	NC travel Dead MT No. 5	—	NC travel Dead MT No. 5	—	
Standard accessories	Coolant system (water soluble), Work lamp, Full enclosure shielding, Jack screws, Foundation washers, Hand tools							
Standard Specifications	Door interlock, Lube monitor (A-1) + hydraulic source pressure detector							
	Chuck auto open/close confirm						Chuck auto open/close confirm (main/sub) Chuck air blow (main/sub) Chuck open/close during spindle rotation	
CNC	OSP-P500L							





	LB2000 EX III
Spindle	Big-Bore spindle specs Bore diameter ø80 mm JIS A2-6 45 to 5,000 min ⁻¹ 22/15 kW (30 min/cont) High power spindle specs: 15/11 kW (15 min/cont)
Turret	V12 turret (VDI), M-12 turret (VDI)
Chucking	Chuck high/low pressure switch, Chucking miss detection, Workpiece stopper in spindle, NC command for chuck clamp pressure
Gauges	In-process workpiece gauging, Touch Setter M (manual), A (auto)
Tailstock	Revolving center: MT No. 4, Self-traveling (hydraulic quill) tailstock High thrust specs, Tailstock thrust high/low switch Tailstock taper: Built-in center MT No. 3 / Threaded center MT No. 3 Built-in center MT No. 4 (distance between centers: 500)
Kit specs	Chucking Kit, Tooling Kit
Steady rests	—
Lubrication	Lube monitor B-2, C-1, C-2
Hydraulic unit	Inverter
Coolant	Shower coolant A,B, Spindle ID coolant A,B, Special coolant pump, High/low coolant pressure switch, Sludge control, Flow / Level detection, Mist collector, Workpiece wash gun, High pressure coolant 4 MPa, 7 MPa, Sludgeless Tank, Automatically replenished coolant
Air	Air blow (blast; chuck* ² , tailstock, spindle ID, turret), Air gun mounted
Cover	Auto open/close of the door on the front (air-driven door, electric door)
Chip handling	Chip pan side or rear, Chip conveyor side or rear discharge L / H, Chip bucket L / H
Dustproofing	Air purge, double wiper
Automation	Bar feeder, Parts catcher, workrest, Robots, NC loaders
High accuracy specifications	AbsoScale, Turcite® lining, Temperature regulators (spindle, hydraulic oil, coolant), Z-axis pre-tensioned ball-screw, TAS-C* ⁴ (Thermo Active Stabilizer–Construction)

	LB3000 EX III	LB4000 EX III
Spindle	Big-Bore spindle specs Bore diameter ø91 mm JIS A2-8 42 to 4,200 min ⁻¹ 30/22 kW (30 min/cont)* ¹ Super Big-Bore spindle specs Bore diameter ø110 mm JIS A2-11 30 to 3,000 min ⁻¹ 22/15 kW (30 min/cont)* ¹ High power spindle specs: 30/22 kW (30 min/cont)	Big-Bore spindle specs Bore diameter ø112 mm JIS A2-11 30 to 3,000 min ⁻¹ 37/30 kW (30 min/cont) Super Big-Bore spindle specs Bore diameter ø185 mm JIS A2-15 12 to 1,400 min ⁻¹ 37/30 kW (30 min/cont)
Turret	V12 turret (VDI), M-12 turret (VDI)* ¹	
Chucking	Chuck high/low pressure switch, Chucking miss detection, Workpiece stopper in spindle, NC command for chuck clamp pressure	
Gauges	In-process workpiece gauging, Touch Setter M (manual), A (auto)	
Tailstock	Revolving center: MT No. 5* ⁵ , Self-traveling (hydraulic quill) tailstock High thrust specs* ¹ , Tailstock thrust high/low switch Tailstock taper: Built-in center MT No. 4 / Threaded center MT No. 4* ¹	Tailstock taper: Built-in center MT No. 5 / Threaded center MT No. 5
Kit specs	Chucking Kit, Tooling Kit	
Steady rests* ¹	Rollers (fixed position), Auto steady rest (self-centering)	
Lubrication	Lube monitor B-2, C-1, C-2	
Hydraulic unit	Inverter	
Coolant	Shower coolant A,B, Spindle ID coolant A,B, Special coolant pump, High/low coolant pressure switch, Sludge control, Flow / Level detection, Mist collector, Workpiece wash gun, High pressure coolant 4 MPa, 7 MPa, Sludgeless Tank, Automatically replenished coolant	
Air	Air blow (blast; chuck* ² , tailstock, spindle ID, turret), Air gun mounted	
Cover	Auto open/close of the door on the front (air-driven door, electric door)	
Chip handling	Chip pan side or rear, Chip conveyor* ³ side or rear discharge L / H, Chip bucket L / H	
Dustproofing	Air purge, double wiper	
Automation	Bar feeder, Parts catcher, workrest, Robots, NC loaders ARMROID* ⁶	—
High accuracy specifications	AbsoScale, Turcite® lining, Temperature regulators (spindle, hydraulic oil, coolant), Z-axis pre-tensioned ball-screw, TAS-C* ⁴ (Thermo Active Stabilizer–Construction)	

*1. Cannot be selected for LB3000 EX III 250 DBC L/M and 200 DBC MY specs.
*2. Mounted as standard on Sub-spindle specs.
*3. Rear discharge is not available with the LB3000 EX III C × 1200 and C × 1300 specifications and the LB4000 EX III C × 1500 and C × 2000 specifications.
*4. Mounted as standard on Y-axis specs.
It is recommended to select this when coolant temperature changes substantially due to the selection of a high pressure coolant unit and other reasons.
*5. MT No. 4 in the case of LB3000 EX III 250 DBC L/M and 200 DBC MY specs.
*6. Can only be selected for LB3000 EX III 500 DBC L/M/W/MW and 450 DBC MY/MYW specs.

Various chip conveyors

Chip conveyor types and application

Type	Hinge + Scraper with drum filter	Hinge	Scraper	Magnet scraper
Application	For steel, castings, nonferrous metal	For steel	For castings	For castings
Features	Filtration of long and short chips and coolant	General use	Magnet scraper more effective for sludge disposal Easy maintenance Blade scraper	Effective with sludge Not suited for nonferrous metals
Shape				 Magnet

Notes: The machine may need to be raised (platform) depending on the type of chip conveyor.
Becomes hinge + scraper (with drum filter) if Sludgeless Tank (option) is selected.

Chucking Kit / Tooling Kit

LB2000 EX III												
Specifications	Std Chucking Kit	L Std Tooling Kit	Chucking Kit			M Chucking Kit			Std Chucking Kit	W Std Sub Chucking Kit	Std Tooling Kit	MW Tooling Kit
			BR Kit	E Kit	D Kit	BR Kit	E Kit	D Kit				
Chuck	Solid 6-in N-06		*1	*2	*3	*1	*2	*3	Solid 6-in N-06			
Sub-spindle chuck									Hollow 6-in B206			
Soft jaws, A			5			5						
Soft jaws, B			3			3						
Hard jaws			1			1						
OD-I		4	6			6						
OD-II		2	3			2						
ID-H32		6	6			3						
OD-I-S										2		3
OD-II-S										2		1
OD-III-S										2		
OD-IV-S										1		
ID-I-S (H32)										4		
ID-II-S (H20)										2		
ID-III-S (H20)										1		
ID-H32-S (main)												3
ID-H32-S (sub)												2
DS MT No. 1-H32			1									
DS MT No. 2-H32		1	1			1				1		
DS MT No. 3-H32												
BS 8-H32			2									
BS 10-H32			2			2						
BS 12-H32			2			2						
BS 16-H32		2	2			2				2		2
BS 20-H32		2	2			2				2		2
BS 25-H32			2			2						2
BS 12-H20										1		
BS 16-H20										2		
Axial mill/drill unit						2						2
Radial mill/drill unit						2						2
Dummy holder						3						3
Revolving center*4 MT No. 4						1						





*1. Hollow 6-in BR06 *2. Hollow 6-in B-206-01 *3. Hollow 8-in B-208-01 *4. Tailstock, MT No. 4; not for T specs.
Notes: For BR chucks, it is possible to select Tnut-Plus, a special T nut that can improve the mounting accuracy at the time of attaching and detaching the jaw in comparison with the standard T nut.
(option) (Note that Tnut-Plus does not improve workpiece gripping accuracy.)
No kit is available for LB2000 EX III MY specifications.





	LB3000 EX III														
Specifications	Std Chucking Kit	L Std Tooling Kit	Chucking Kit			M Chucking Kit			MY Chucking Kit			Std Chucking Kit	W Std Sub Chucking Kit	Std Tooling Kit	MW Tooling Kit
			BR Kit	E Kit	D Kit	BR Kit	E Kit	D Kit	BR Kit	E Kit	D Kit				
Chuck	Solid 8-in N-08A6		*1	*2	*3	*1	*2	*3	*1	*2	*3	Solid 8-in N-08A6			
Sub-spindle chuck													Hollow 6-in B206		
Soft jaws, A			5			5			5						
Soft jaws, B			3			3			3						
Convex hard jaws			1			1			1						
Three-step hard jaws				1			1			1					
Two-step hard jaws					1			1			1				
OD-I		4	6			6			4 (T specs: 3)						
OD-II		2	3			2			2						
OD-I-S														2	3
OD-II-S														2	1
OD-III-S														2	
ID-H40		6	6			3			3						
ID-I-S														4	
ID-II-S														2	
ID-III-S														1	
ID-H40-S (main)															3
ID-I-S (H40) (sub)															2
DS MT No. 1-H40			1												
DS MT No. 2-H40			1												
DS MT No. 3-H40		1	1			1			1					1	
DS MT No. 4-H40			1												
BS 10-H40			2			2			2						
BS 12-H40			2			2			2						1
BS 16-H40			2			2			2						2
BS 20-H40		2	2			2			2						2
BS 25-H40		2	2			2			2					2	2
BS 32-H40			2			2			2					2	
BS 12-H20														1	
BS 16-H20														2	
Axial mill/drill unit						2			2						2
Radial mill/drill unit						2			2						2
Dummy holder						3			3						3
Revolving center** MT No. 5						1			1						

*1. Hollow 8-in BR08A6 *2. Hollow 8-in B-208A6 *3. Hollow 10-in B-210A6 *4. MT No. 4 in the case of 250 DBC L/M and 200 DBC MY specs. Not included for T specs.
Note: For BR chucks, it is possible to select Tnut-Plus, a special T nut that can improve the mounting accuracy at the time of attaching and detaching the jaw in comparison with the standard T nut. (option) (Note that Tnut-Plus does not improve workpiece gripping accuracy.)


LB4000 EX III												
Specifications	Std Chucking Kit	L Std Tooling Kit	Chucking Kit			M Chucking Kit			MY Chucking Kit			MW Tooling Kit
			BR Kit	E Kit	D Kit	BR Kit	E Kit	D Kit	BR Kit	E Kit	D Kit	
Chuck	Solid 10-in N-10A8		*1	*2	*3	*1	*2	*3	*1	*2	*3	
Soft jaws, A			5			5			5			
Soft jaws, B			3			3			3			
Three-step hard jaws			1			1			1			
Two-step hard jaws				1	1		1	1		1	1	
OD-I		4	6			6			6			
OD-II		2	3			2			2			
OD-I-S												3
OD-II-S												1
ID-H40		6	6			4			4			
ID-H40-S (main)												4
ID-I-S (H40) (sub)												2
DS MT No. 1-H40			1									
DS MT No. 2-H40			1									
DS MT No. 3-H40		1	1			1			1			
DS MT No. 4-H40			1									
BS 10-H40			2			2			2			2
BS 12-H40			2			2			2			2
BS 16-H40			2			2			2			2
BS 20-H40		2	2			2			2			2
BS 25-H40		2	2			2			2			2
BS 32-H40			2			2			2			2
Axial mill/drill unit						2			2			2
Radial mill/drill unit									2			2
Dummy holder									3			3
Revolving center*4 MT No. 5									1			

*1. Hollow 10-in BR10A8 *2. Hollow 10-in B-210A8 *3. Hollow 12-in B-212A8 *4. Tailstock, MT No. 5; not for T specs
Note: For BR chucks, it is possible to select Tnut-Plus, a special T nut that can improve the mounting accuracy at the time of attaching and detaching the jaw in comparison with the standard T nut. (option) (Note that Tnut-Plus does not improve workpiece gripping accuracy.)

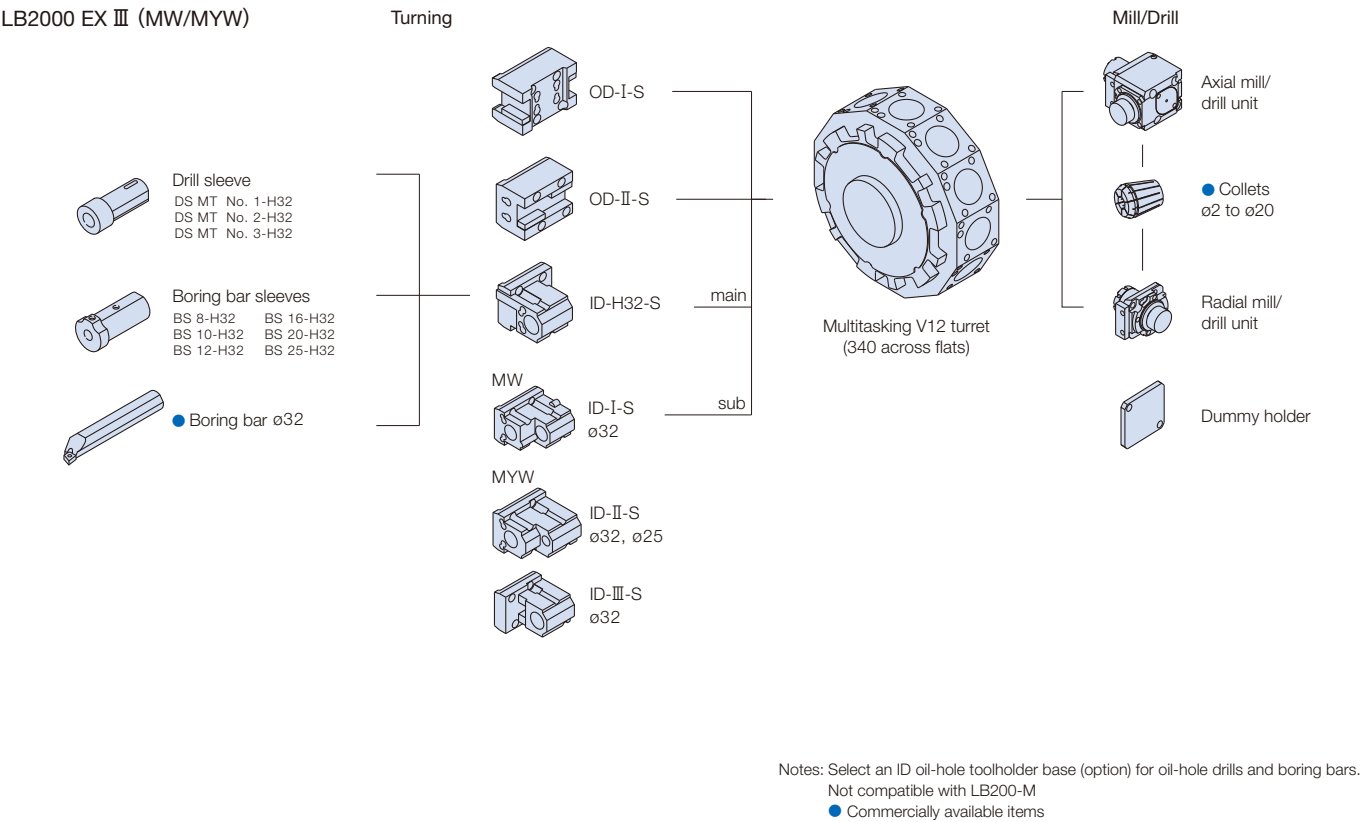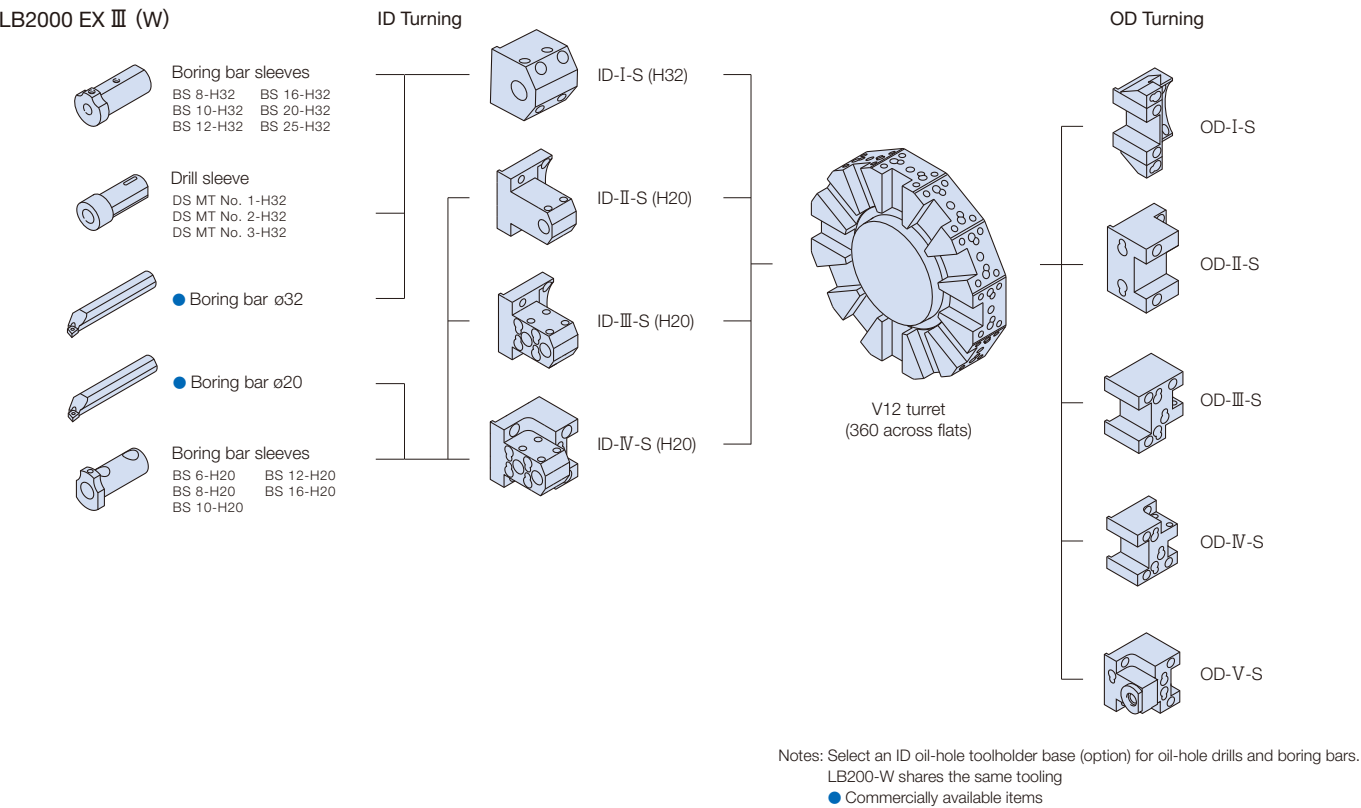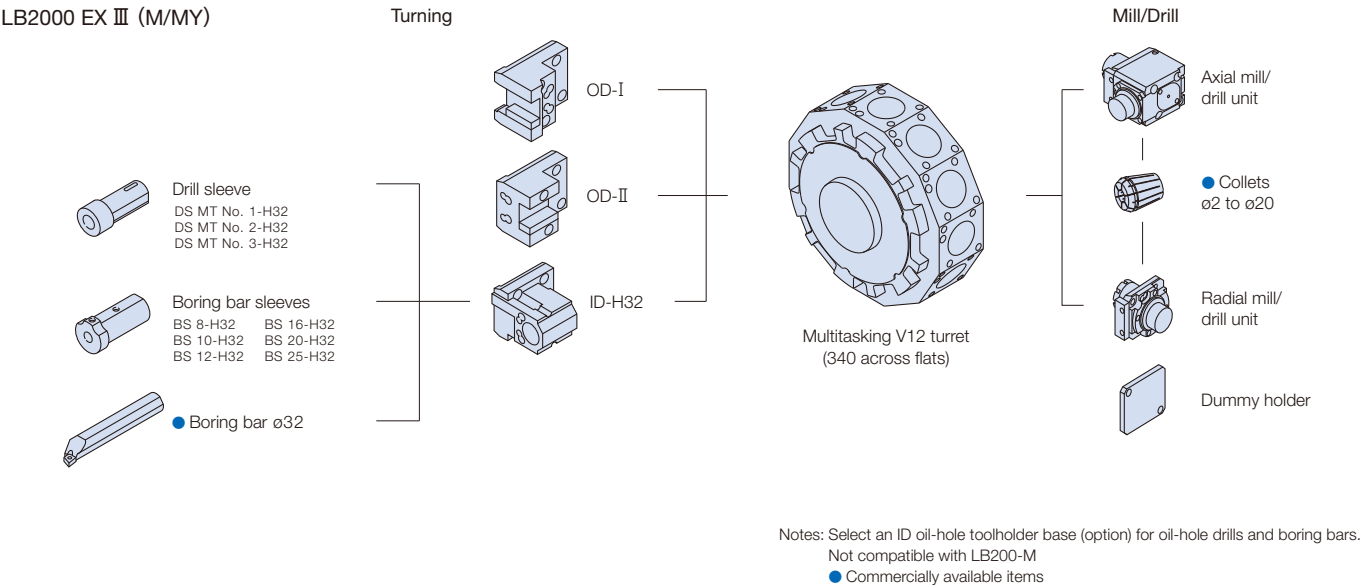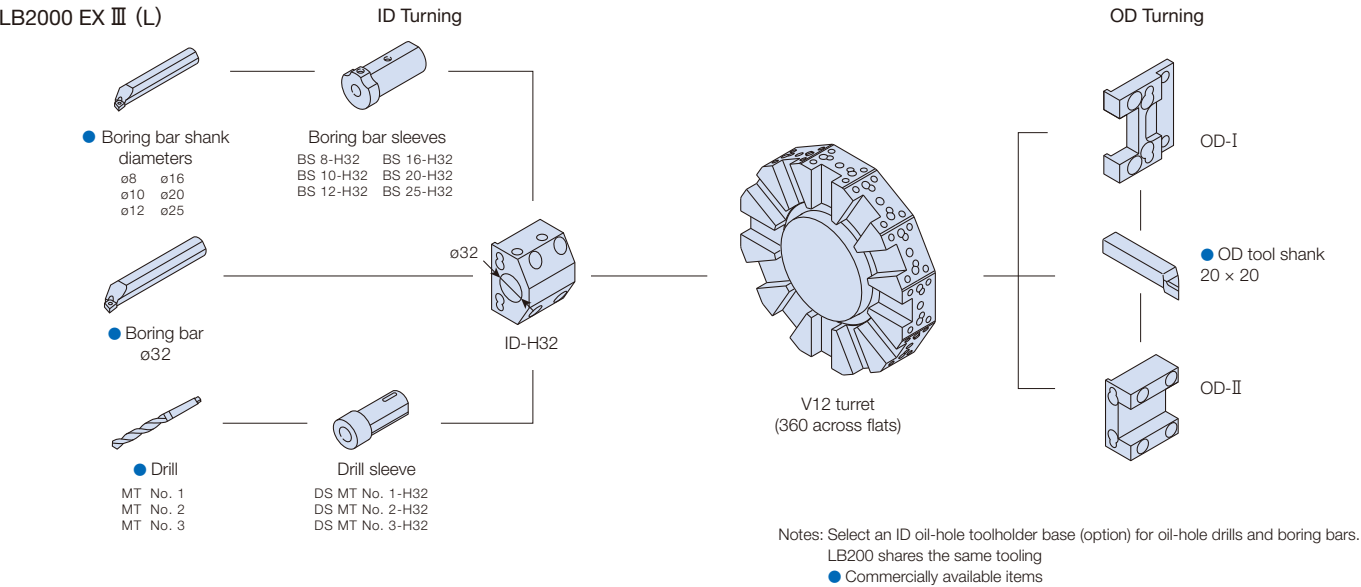


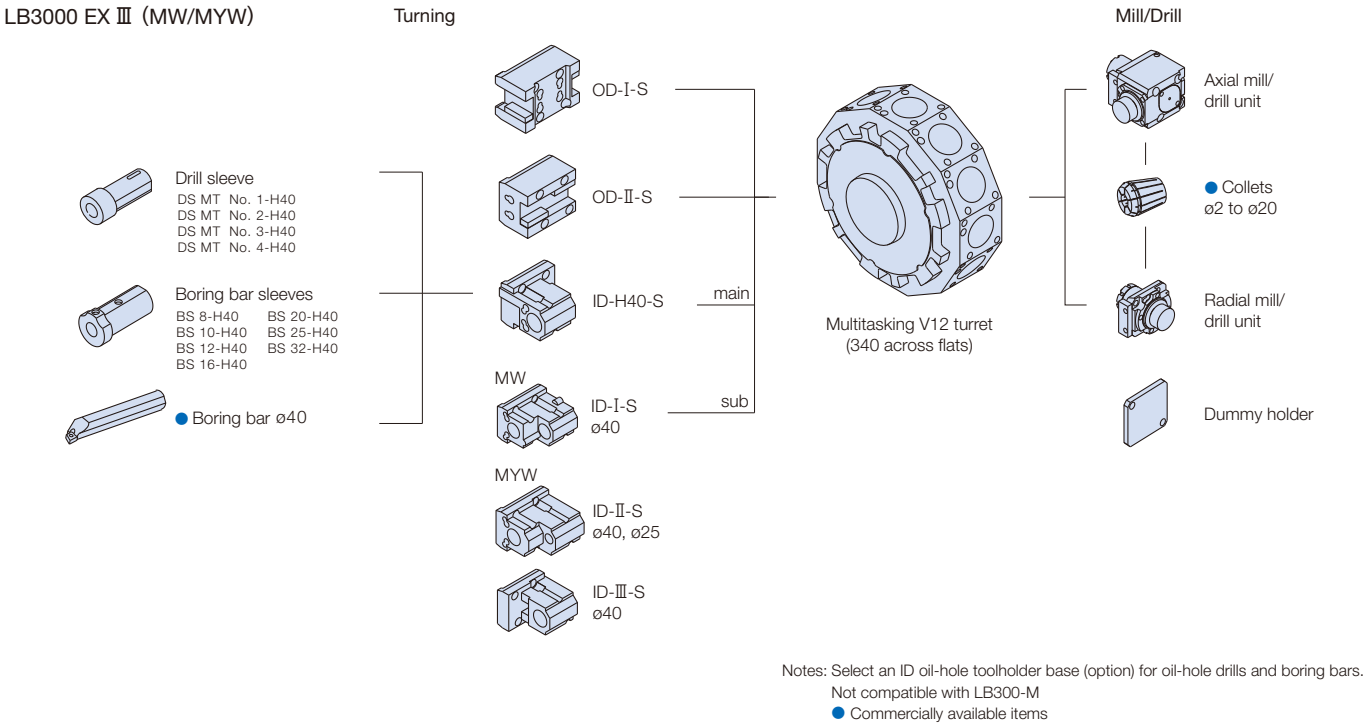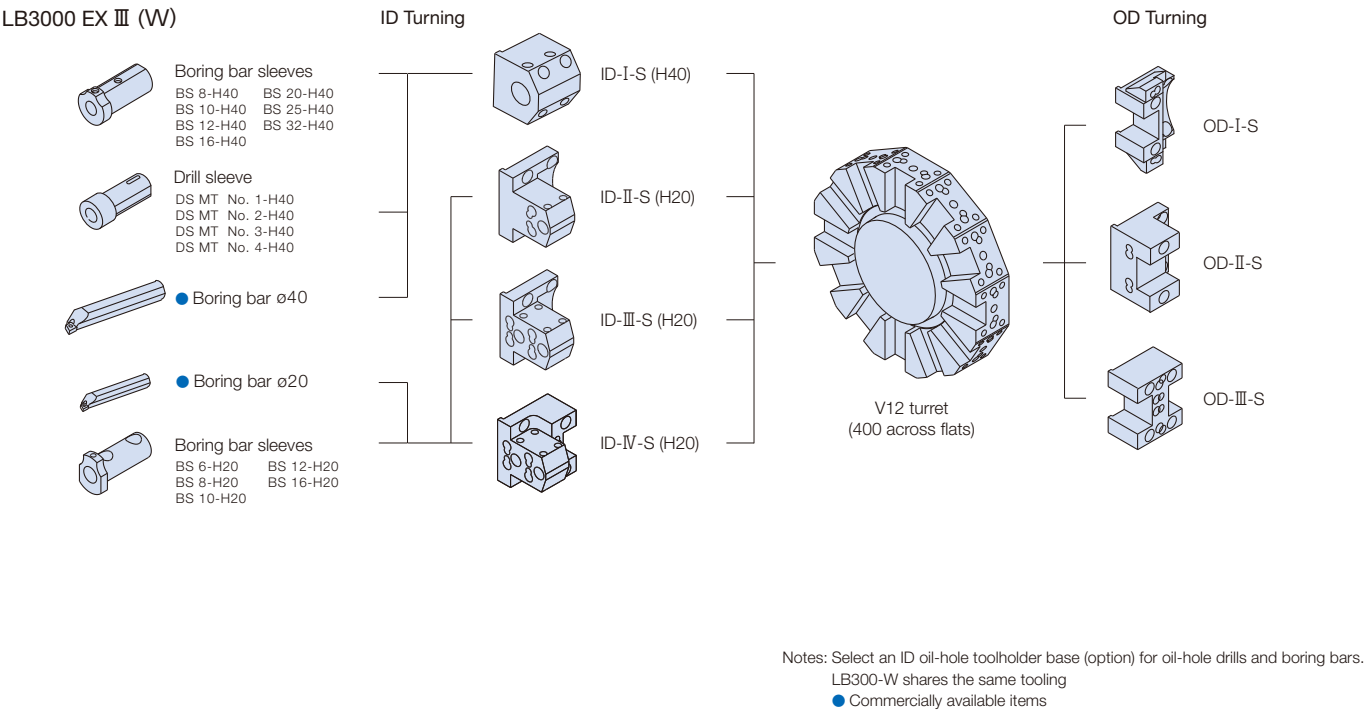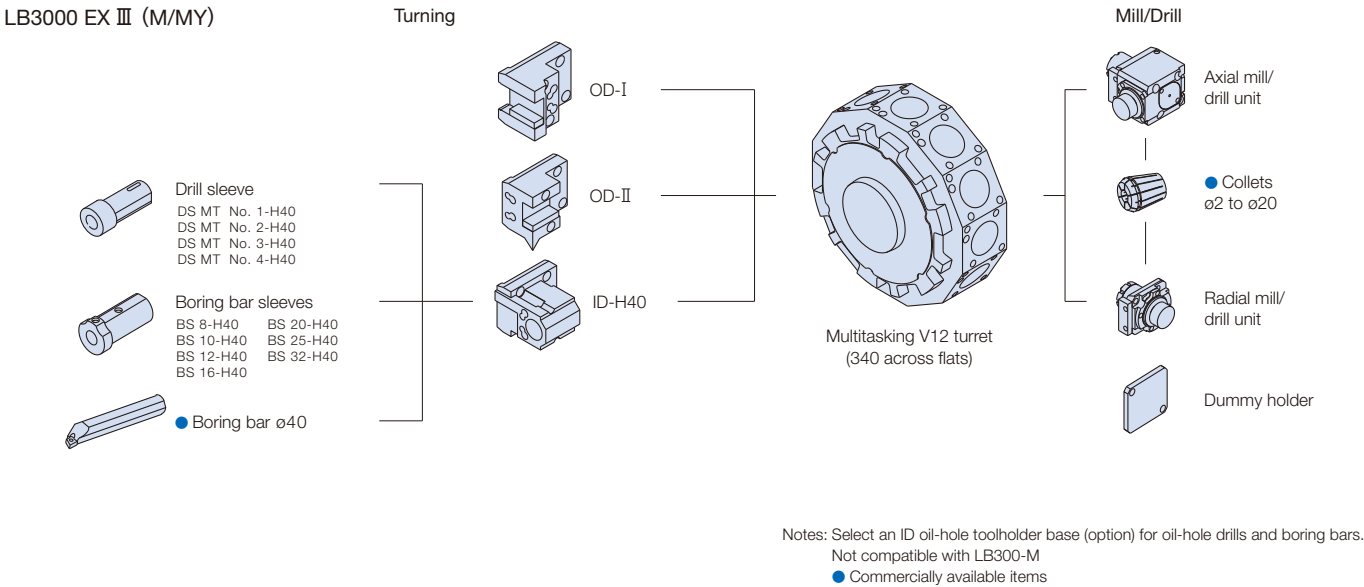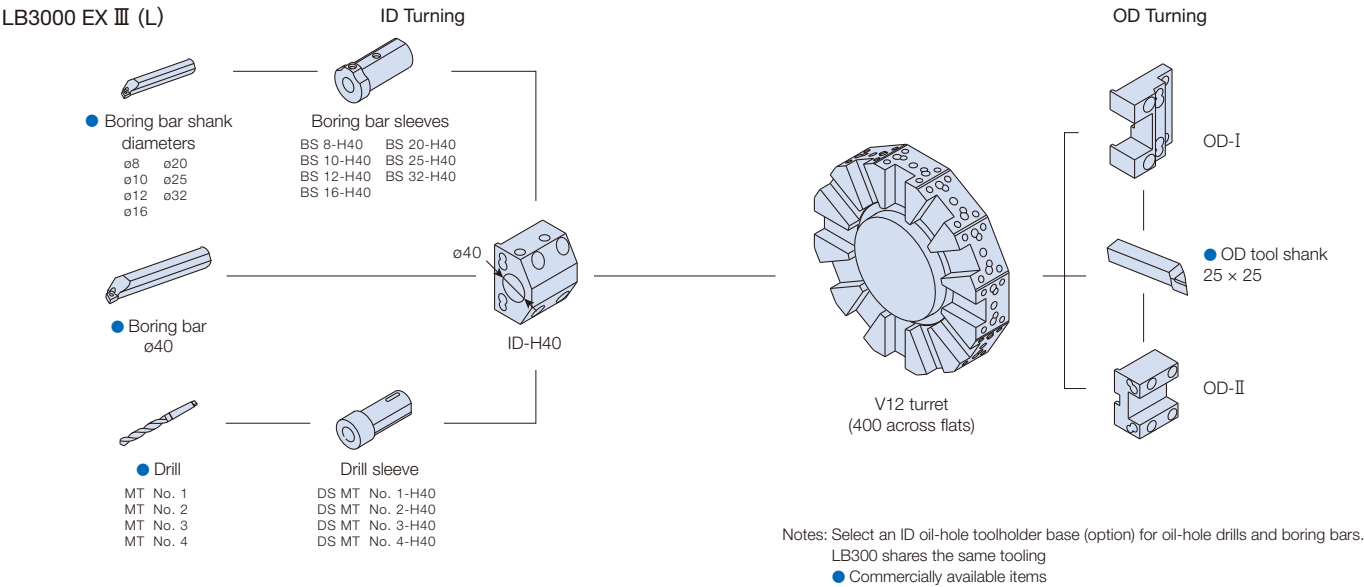


LB4000 EX III (L)

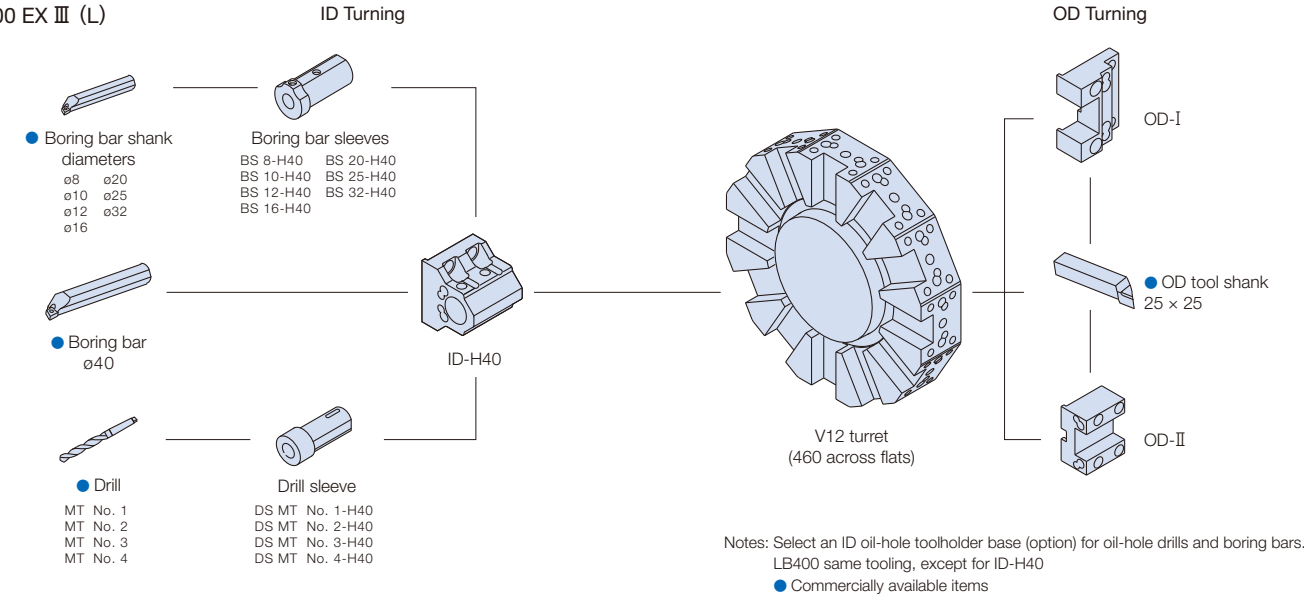




LB4000 EX III (M/MY)

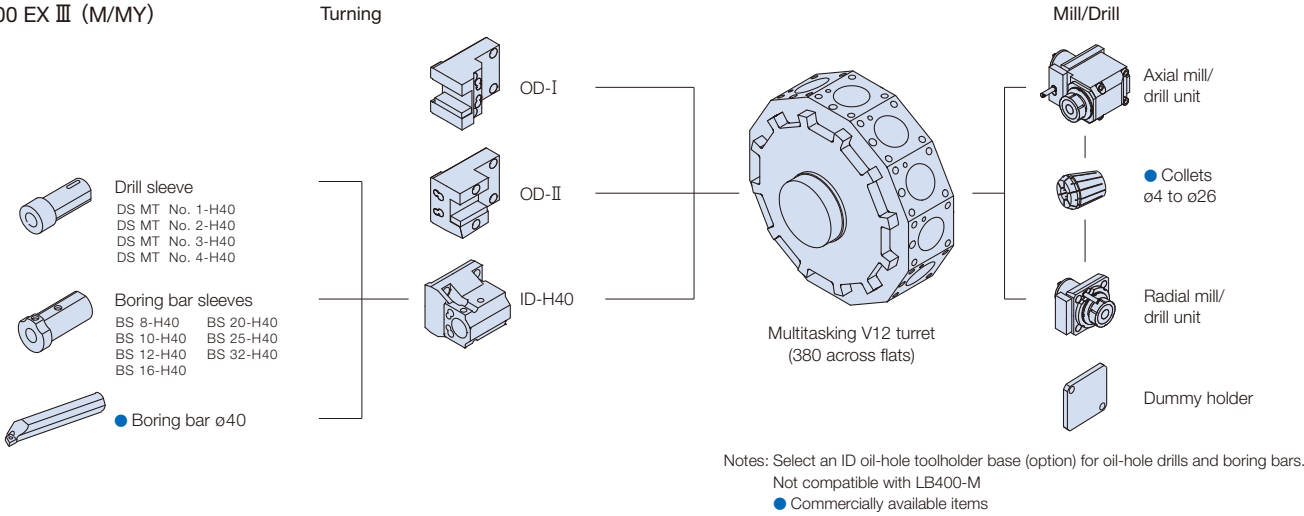


LB4000 EX III (MYW)

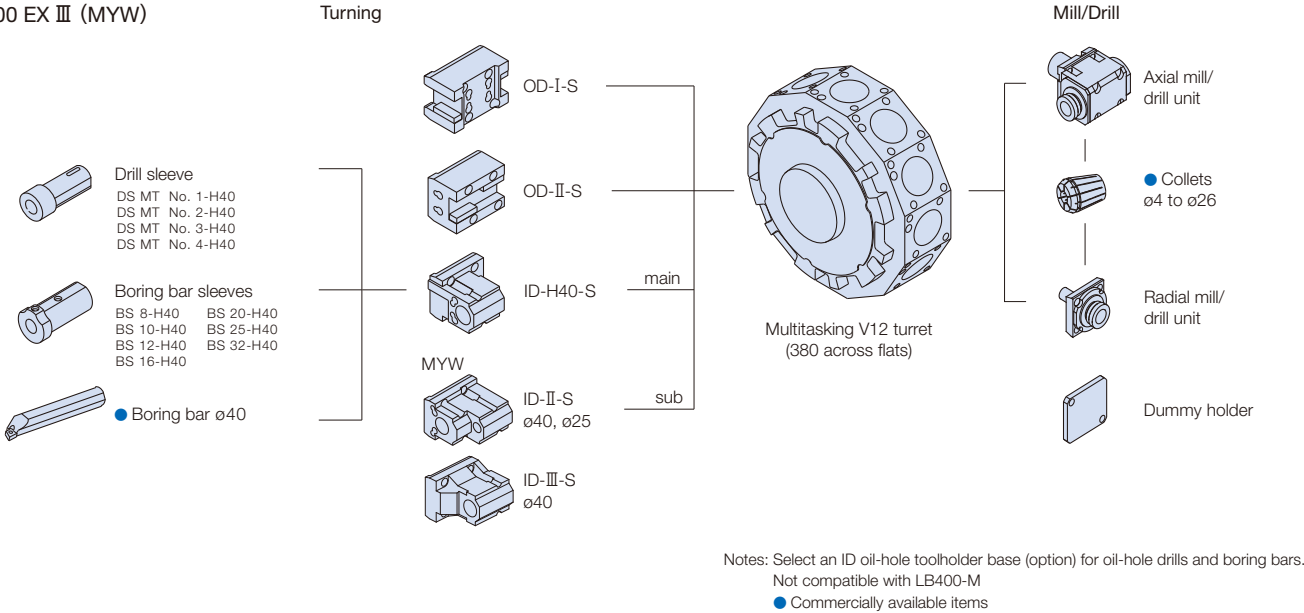

LB2000 EX III


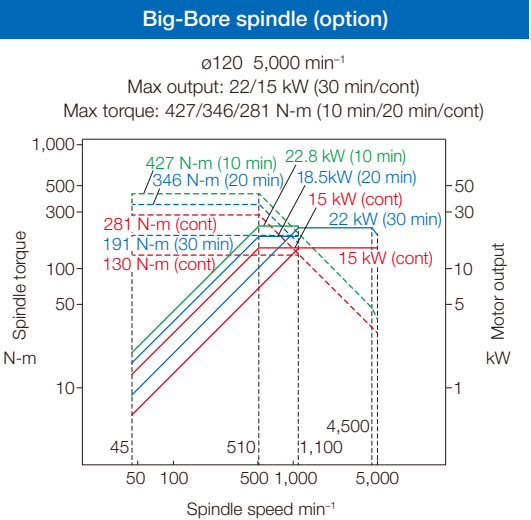
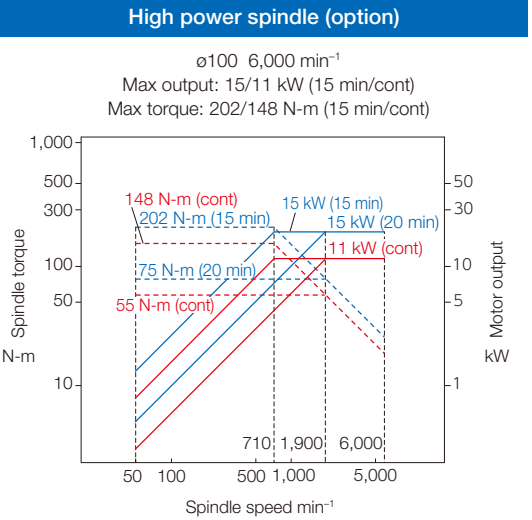
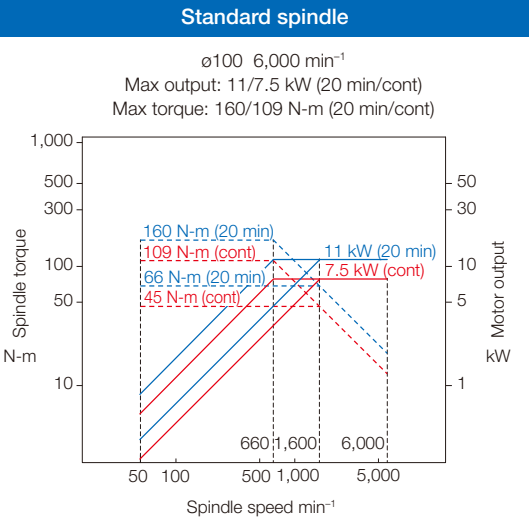


Sub spindle

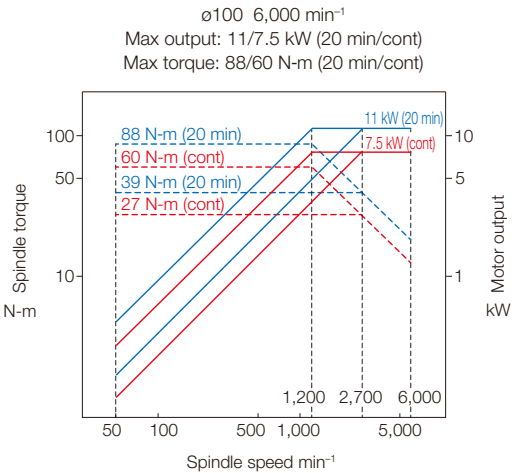


— The spindle lineup

LB3000 EX III

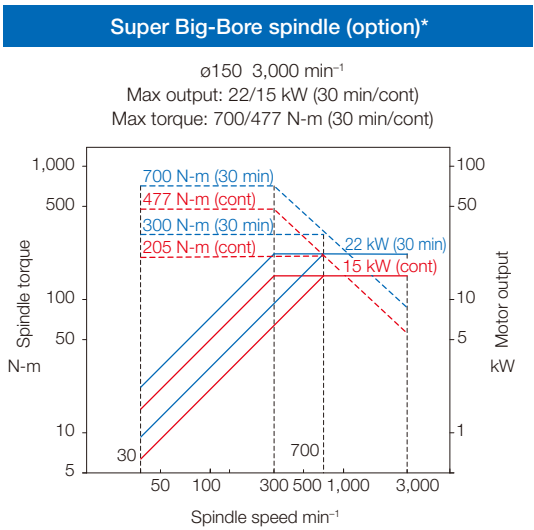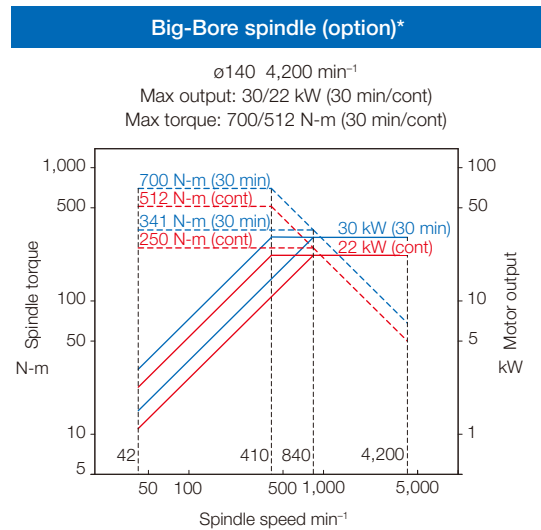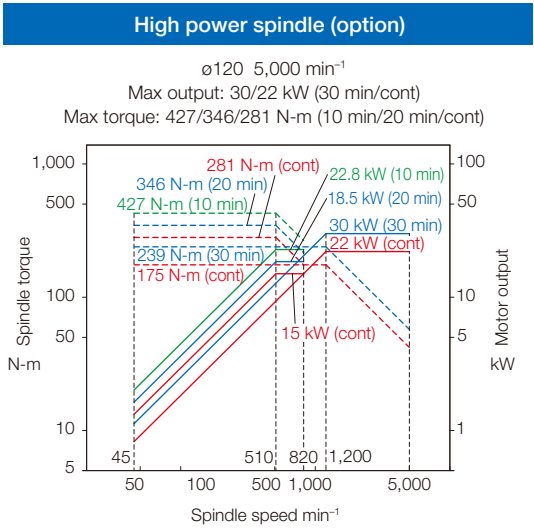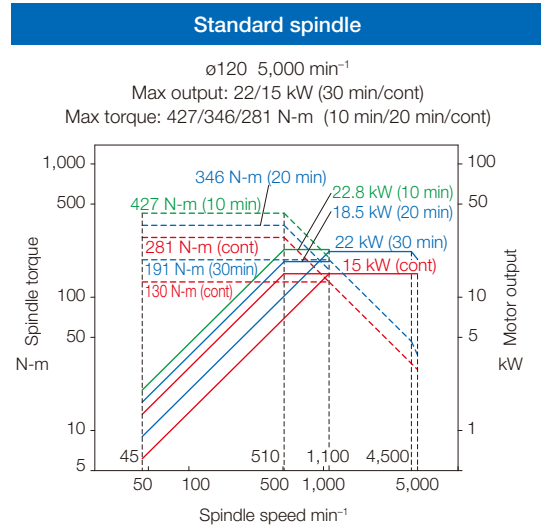




* Big-Bore spindle and Super Big-Bore spindle specs cannot be selected for 250 DBC L/M and 200 DBC MY specs

— Sub spindle

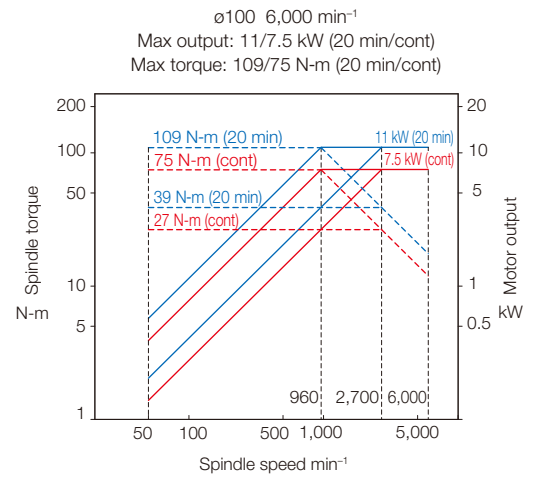


— The spindle lineup

LB4000 EX III

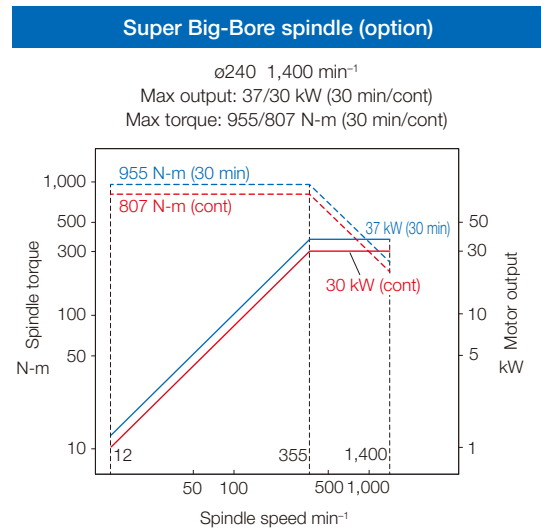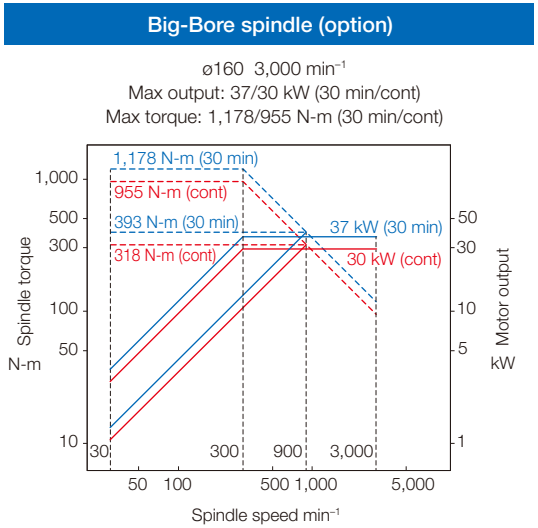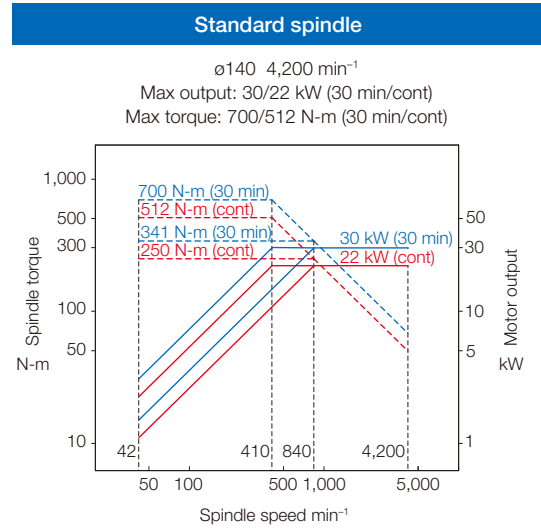

— Sub spindle

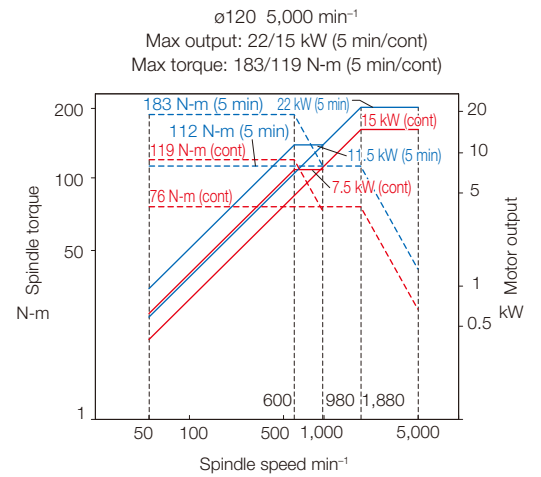

Standard Specifications

Basic Specs	Control	Turning: X, Z simultaneous 2-axis, Multitasking: X, Z, C (or Y) simultaneous 3-axis
	Position feedback	OSP full range absolute position feedback (zero point return not required)
	Min / Max command	±99999.999 mm, ±99999.999° 8-digit decimal, command units: 0.001 mm, 0.01 mm, 1 mm, 0.001°, 0.01°, 1°
	Feed override	Cutting feed override 0 to 200%, rapid traverse override 0 to 100%
	Spindle override	Turning spindle override: 50 to 200%, M-spindle override (milling specs): 30 to 300%
	Tool information management	Compensation, life management, shape data, etc. are collectively managed for each tool (1,000 tools can be registered)
	Tool compensation	Tool offset, nose R compensation (for milling, tool diameter compensation), tool wear compensation, Number of comp sets: 2 sets for each of the registered tools (up to 1,000 tools) However, the maximum number of total sets (standard) is 32
	Operation panel	15-inch operation panel (15-inch XGA screen + multi-touch panel operations), operation panel tilt adjustment, Portable pulse handle (type A), keyboard QWERTY layout, window operation that is optimal on machine shops
Machining programming	Security	Operator authentication, lock screen, OSP-VPSII-STD
	Program capacity	Program storage: 4 GB, operation buffer: 2 MB
	Programming	Program editing, file name index display, scheduled programs, combined use of mm/min, zero shift, basic interpolation, Circular radius designate, taper angle designate, threading (lead thread ridge designate, variable lead thread, Chamfering while threading, multiple threads by specifying phase difference, fixed threading cycle (single cycle, multiple cycles)), Threading slide hold (pause for threading during fixed cycle), auto chamfering, arbitrary angle chamfering, Auto programming for turning (LAP 4), fixed cycle for tapers, groove cutting/spindle drilling cycle, Specs for M-spindle machines (fixed drilling cycles, synchronized tapping, keyway cycle), user task (GOTO statement, IF statement, arithmetic operations, IF/THEN, DO/WHILE, GOTO (variables) statement, functional operations, Logical operations, Inverse trigonometric functions, common variables (Standard: 200 sets), local variables, system variables, Sub-programs, G-/M-code macros (G-code: 20 sets, M-code: 20 sets), READ/WRITE/GET/PUT) Block skip (number of sets: 1), oriented spindle stop, spindle phase synchronizing, programming help
Operations	OSP suite	Various "suite apps" support the series of machining operations, and "suite operation" enables one-touch access to those apps
	Easy Operation	"Single-mode operation" to complete a series of operations, "Setup data" to set the setup data easily, "Soft jaw machining" to automatically machine soft jaws
	Operations	Sequence return, tool restart, sequence number search, manual interrupt & auto return, MDI input, tool compensation change, Library programs, parameter I/O, relative actual position display, PLC monitor, operation help, alarm help
Monitoring, adaptive control		Load meter display, synchronized tapping torque monitor, maintenance monitor, collection of log data for maintenance, SERVO <i>NAVI</i> AP, local variables display, display of remaining machining time
MacMan plus		Aggregation and display of machining records, operating records, operating history and trouble information, Visualization of power consumption, output of records and trouble info file
Communications / Networking		USB3.0 interface (2 ports), Ethernet, DNC-T1, Smart I/F (Connect Plan interface), browser
High-Speed/ High-Accuracy Functions		Hi-G control, cycle time reduction (machining time reduction, easy parameter setting), rapid traverse droop, exact stop check, C-axis pitch error compensation (milling specs), variable lost motion compensation, turret position error comp
Energy-saving functions	ECO suite plus	ECO Idling Stop, ECO Operation, ECO Power Monitor*
	Power Regeneration System	Regenerative power is used when the spindle and feed axes decelerate to reduce energy waste

* The displayed power is an approximate value. If you need an accurate power value, please select the option to attach a wattmeter.

Kit specs

		NML NML-M E D	OT-IGF OTM E D	Digital twin Digital twin-M E D VE VD				Digital twin OT-IGF Digital twin OTM E D VE VD			
Interactive functions	Advanced One-Touch IGF-L (including real 3-D Simulation)										
	(Turning: L, LW Milling: M, MW, MY, MYW)		☐	☐					☐	☐	☐
	Smart OSP Operation Machining process chart preparation, editing and operating functions		●	●	●	●	●	●	●	●	●
	Automatic decision of the turning process in the machining process chart		●	●	●	●	●	●	●	●	●
Digital Twin On Machine	Virtual machining				●	●	●	●	●	●	●
	Quick modeling				●	●	●	●	●	●	●
	OPC UA for Machine Tools				●	●	●	●	●	●	●
	OSP API KIT				●	●	●	●	●	●	●
Digital Twin On PC	Virtual machining					●	●			●	●
	Quick modeling					●	●			●	●
Programming	Program notes		●		●		●		●		●
Machining	Work coordinate system select 10 sets		▲		▲		▲		▲		▲
Operations	Functions for milling specs Change of coordinates	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	Profile generate	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	Threading Circular threading		●		●		●		●		●
	Pause for threading during non-fixed cycle	●	●	●	●	●	●	●	●	●	●
	Harmonic Spindle Speed Control (HSSC)	●	●	●	●	●	●	●	●	●	●
	Mid-block sequence return		●		●		●		●		●
Tool management	Tool life management (including prior notice of tool life)		●		●		●		●		●
Monitoring	Real 3-D Simulation			●	●	●	●	●	●	●	●
	Cycle time over check	●	●	●	●	●	●	●	●	●	●
	Load monitor (spindle, feed axis), Including no-load detection, part number expansion, Workpiece ejection detection			●	●	●	●	●	●	●	●
	NC operation monitor (counter, totaling)	●	●	●	●	●	●	●	●	●	●
	Status indicator (triple lamp) Type C	●	●	●	●	●	●	●	●	●	●
Automation/Untended Operation	Auto power shutoff	●	●	●	●	●	●	●	●	●	●
High-Speed/ High-Accuracy Functions	Hi-Cut Pro	▲	▲	▲	▲	▲	▲	▲	▲	▲	▲
	Cycle time reduction (operation time reduction)	●	●	●	●	●	●	●	●	●	●

☐: Applicable depending on machine specifications (L specs, LW specs, M, MW specs, MY, MYW specs)
▲: Supplied to the -M kit (milling specs of each kit)
Notes: NML = Normal; OT-IGF = One-Touch IGF; OTM = One-Touch M; E = Economy; D = Deluxe;
VE = Virtual Economy; VD = Virtual Deluxe.
For each specification, please refer to Optional Specifications in pp. 59 and 60.


Optional Specifications

Operation panel	Keyboard	Keyboard ABC layout
Interactive functions	Advanced One-Touch IGF-L	With the entry of a unicursal turning shape, the machining method is automatically decided
		Turning: end face, OD, ID, thread, groove, etc.
		Milling: boring, pocket machining, face milling, etc. A wide range of machining types is covered
		Realistic 3D simulated test cuts. Direct from machining order tables (no G-/M-codes)
		Slope machining (available only for slope machining specs)
	Smart OSP Operation	By using the process chart to follow the guidance, rapid preparation for machining operations is possible even without knowing G-/M-code.
	Machining process chart operating	Direct operation from the machining order chart (no G-/M-code).
		Independent operation for each process or from the middle of a process is possible.
Digital Twin	Virtual machining	Automatic decision of the turning process in the machining process chart
		Confirmation tasks are more efficient in a virtual space.
		Machining trajectories, material scraping, interference checks.*1
		High-speed, high-precision machining time estimation
		Power consumption (carbon dioxide emissions) estimation
	Quick modeling	Easy preparation of 3D models of tools, jigs and workpieces
		Supply of affluent 3D model data
		Selecting 3D models of tools allows not only virtual spaces for digital twins but also automated configuration of real space control data.
		Communication specification for machine tools compatible with OPC UA communication
		Compatible with Ver. 1.00 specifications and essential functions
	OPC UA for Machine Tools	API for Windows®-based application development
		API for Windows®-based application development
Programming	Machining Operations	Program notes
		Imperial/metric switch
		Work coordinate system
		Functions for milling specs
		Coordinate change and drawing conversion
		Profile generate
		Coordinate calculation
		NCYL command
		Helical cutting
		Flat Turning
		Hob machining
		Synchronized C-axis control
		Slope machining
		Threading
		Circular threading
		Threading slide hold
		Threading matching
		Oscillation cutting
		Threading override
		Spindle tapping cycle
		Harmonic Spindle Speed Control (HSSC)
		Sequence return
		Manual cutting feed
		User Task
		Block skip
		Home position
		Cutting step feed
		Inverse time feed
		Z-W overlap function
		X-axis radius command for turning
		Spindle dead-slow cut
Tool management		Tool life management (including prior notice of tool life)
		Tool compensation
		Y-axis center height offset
		Multiple simultaneous tool management
		Turret intermediate indexing
		TOOL-ID
		TOOL-IC
External Input Output	Communication Functions	RS-232C interface
		FL-net
		Ethernet/IP
		DNC connection
		DNC-T3
Networking		DNC-C/Ethernet
		DNC-DT
		OSP-MTConnect
		MTConnect I/F for production management systems produced by other companies


Measuring	Touch Setter M (manual)	Manual tool offset compensation using the touch setter	
	Touch Setter A (auto)	Automatic tool offset compensation and breakage detection using the touch setter	
	Tool breakage detection	Tool breakage is automatically detected with Touch Setter gauging	
	Tool breakage detection	The sensor attached to the top of the spindle detects milling tool breakage	
	In-process workpiece gauging	Auto zero offset using a standard ring. Workpieces are automatically gauged to compensate tool offset	
	Z-axis automatic zero offset	Workpieces are automatically gauged to compensate Z-axis zero offset	
	C-axis automatic zero offset	Workpieces are automatically gauged to compensate C-axis zero offset	
	Y-axis gauging	Workpieces are automatically gauged to compensate Y-axis zero offset, tool offset and tool diameter	
	3-point gauging	The cylinder outer diameter and hole inner diameter are gauged at three points to calculate diameters and central positions and set them as variables	
	Post-process workpiece gauging	Measures workpiece outside machine, and compensates for tool offset based on measurement results	
Monitoring, adaptive control	Measured data output to file	Measured data output to file	
	One-Touch Spreadsheet	Excel® files assist machining setups	
	Collision Avoidance System	Interference during automatic, MDI and manual operations is prevented.	
	(Units and actions to prevent interference are limited)	Easy modeling of shape data	
	Real 3-D Simulation	Real time simulation of all machining modes (auto, MDI, manual operation)	
		Solid/cross section/transmission display of workpieces, track line display, tool shape display	
		With cycle time calculator	
		With 2D Simulation	
	Cycle time over check	An alarm goes off and the operation stops when the prescribed cycle time is exceeded	
	Load monitor	CNC monitors and displays load conditions of feed axis and spindle in a graph (machining stops when overloaded)	
		No-load detection, part number expansion, workpiece ejection detection	
	NC operation monitor	NC hour meters for NC start, spindle rotation, cutting, etc. and 4 NC workpiece counters	
	Status indicator	NC running lamp, alarm lamp, machining end lamp	
	Machine Status Logger	Commands, operations and spindle and feed axis loads are recorded to increase, analyze and improve machining traceability	
	AI machine diagnostics (feed axes)*2	AI-based feed axis diagnostic function	
	Machining Navi L-gII	Search function for selecting the machining conditions that best prevent chatter during turning	
	Machining Navi T-g Threading	Search function for selecting the cutting conditions that best prevent chatter during threading	
	Workpiece counters	Counted with M02 and M30 or dedicated M-code	
	(Workpiece counters attached to machine)	[Count only], [Cycle stop when the full count is reached], [Start is disabled when the full count is reached]	
	Hour meter (meter attached to machine)	The power ON time, spindle rotation time and NC running time are counted	
	Operation end buzzer	A buzzer goes off at M02/M30 and M00/M01 and also when an alarm is generated	
	Feed axis retraction	Pull back in axial direction during power failures	
	Tapping retraction	Retract the tapping tool when a power failure occurs during tapping	
	Tool retract cycle	Execute shelter cycle according to interruption signal	
	Adaptive control (AC) using external signals	Interruption program start, pause, feed shaft override using external signals	
	Tool monitoring system	CARON TMAC8 I/F	
	General purpose overload detection	Detect overload in external devices and display an alarm	
	Chucking miss detection	Detect chucking errors during workpiece loading	
	Automation/ unattended operation functions	Auto power shutoff	Power is automatically turned off when machining is completed or an alarm is generated
		Warm-up	Automatically turn on the power to perform warm-up at the preset time
External program		A (pushbutton) 8 types	
		B (rotary switch) 8 types	
		C1 (digital switch) BCD, 2-digit	
Peripheral devices for machining assistance and automation	C2 (external input) BCD, 4-digit		
	Connection with automated devices	Robot loader I/F*3. Okuma loader (OGL) interface. Bar feeder I/F	
	Tailstock	NC/self-traveling	
	NC Tailstock	Specs with improved position detection accuracy, high-accuracy detection of sizing positions, ultra-low thrust specs	
	Steady rest	Auto tow-along/self-traveling (rack-and-pinion)*4	
ROID control system	Opposing spindle - tailstock control	The W-axis of the opposing spindle can be used as an NC tailstock	
	Workpiece support equipment	Self-traveling workpiece support function with W-axis control	
		Easy robot programming with the guidance of ROID Navi	
	ARMROID (LB3000 EX III only)	Automation and support of machining with in-machine robots	
	High-Speed/ High-Accuracy functions	0.1 μm control*3	0.1 μm command increments
AbsoScale detection*3		X-, Z-, Y-axis	
Pitch error compensation		X-Y-Z axis pitch error compensation	
Hi-Cut Pro		High-speed, high-accuracy machining with speed control and acceleration control suitable for parts machining	
Cycle time reduction*3		Shortening of operation time: Skipping of the completion of auxiliary operations such as spindle rotation, turret indexing, and coolant, and simultaneous operation with axis travel	
Energy-saving functions		Chuck open/close and auto tailstock advance/retraction during spindle rotation	
	TAS-C (construction)	Corrects thermal deformation error generated during shop temperature changes affecting machine construction	
	ECO suite plus	ECO Power Monitor (on-machine wattmeter)	
		External output interface of consumed electricity	
		Spindle Power Peak Limiter	
Other functions	Spindle speed setting	Spindle acceleration can be easily changed	
	Holding with C-axis brake	Even if Alarm A occurs during C-axis clamping, the clamp is not released and the workpiece is held	
	M spindle maximum rotation speed limit for each tool	The rotation speed limit is set for each milling tool	
	Earth leakage circuit breaker	Power shutoff with the detection of earth leakage	
	External M-signals	[2 sets, 4 sets, 8 sets, 16 sets]	
	OSP-VPSII-EX	Allowlist-based virus protection system	
	Monitor display language (multi-language)	Language switchable	

*1. If the Collision Avoidance System specs are enabled, then interference checks can be performed for structural components of the machine in addition to workpiece, tools, and fixtures.
*2. With AbsoScale detection specs, ball-screw wear detection is possible.
*3. Engineering discussions required. *4. This is an optional specification for LB3000 EX III 1300 DBC L/M and 1200 DBC MY specs.
Note: Cannot be selected for some machine specifications.


LB2000 EX III (L)

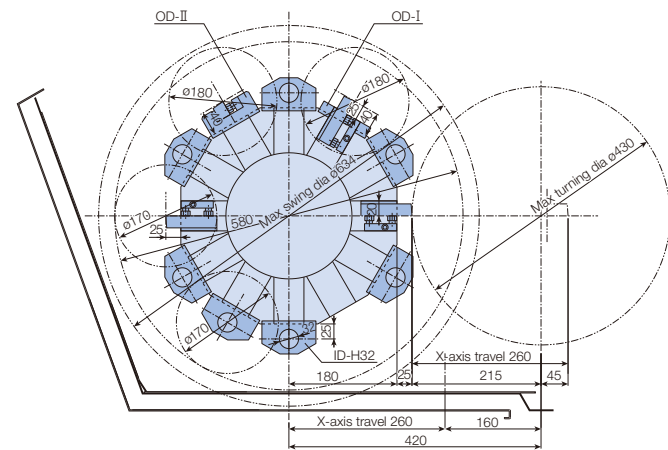


LB2000 EX III (M)

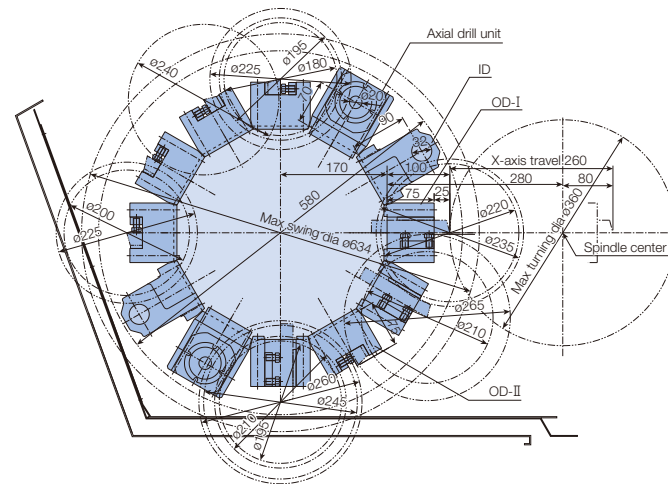


LB2000 EX III (MYW)

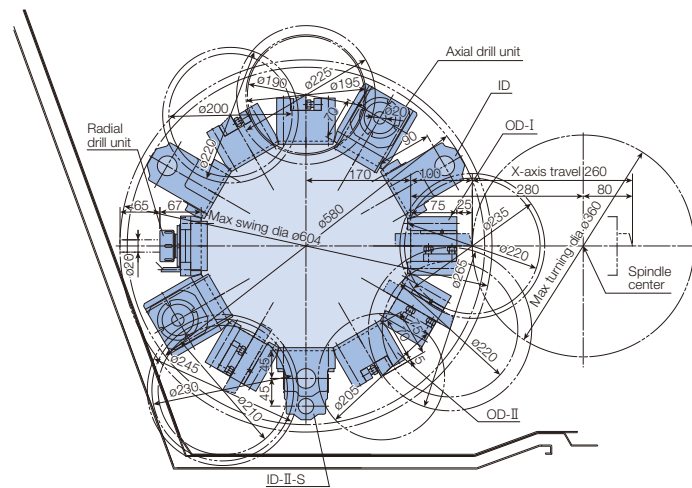


LB3000 EX III (L)

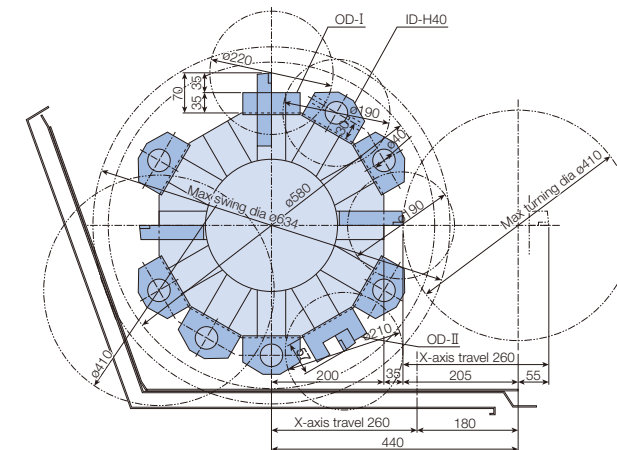

LB3000 EX III (M)

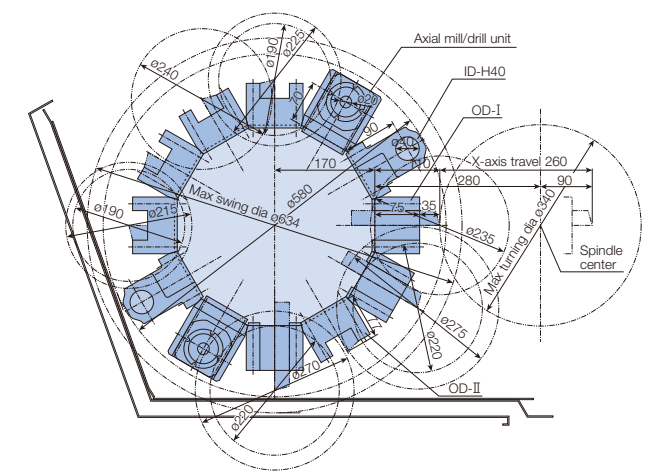


LB3000 EX III (MYW)

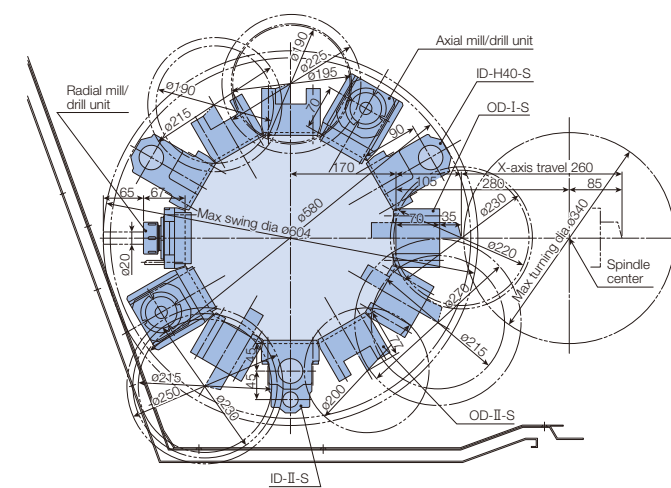


Note: These diagrams are for 250, 500, and 1000 DBC L/M specs and 450 and 800 DBC MYW specs.


LB4000 EX III (L)

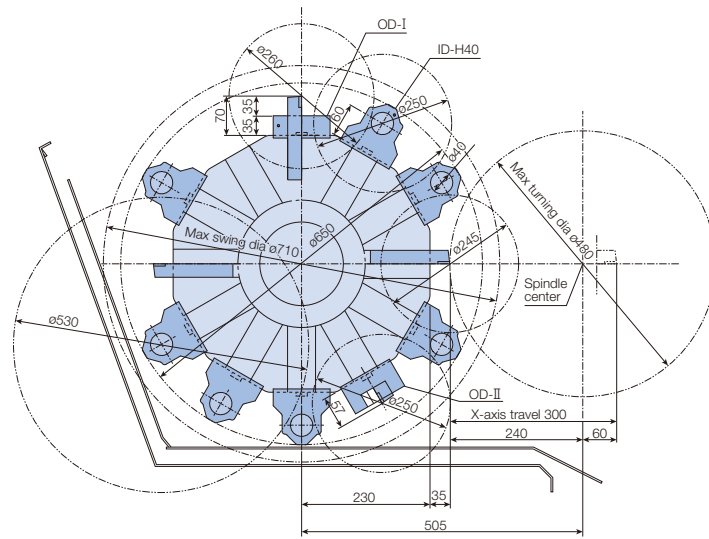

LB4000 EX III (MYW)

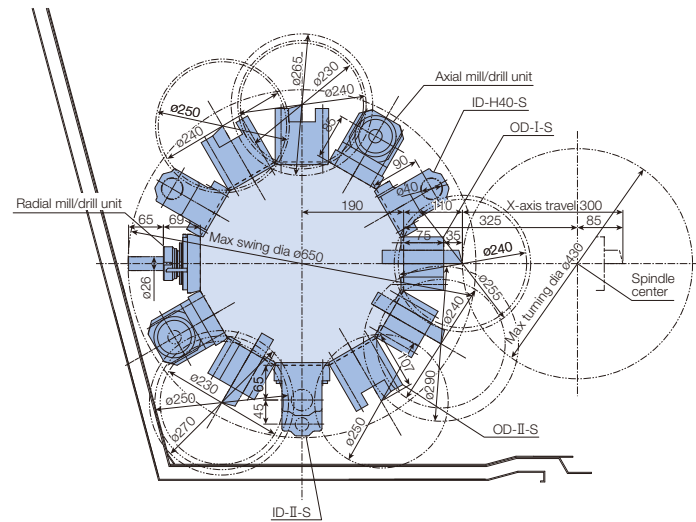


LB4000 EX III (M)

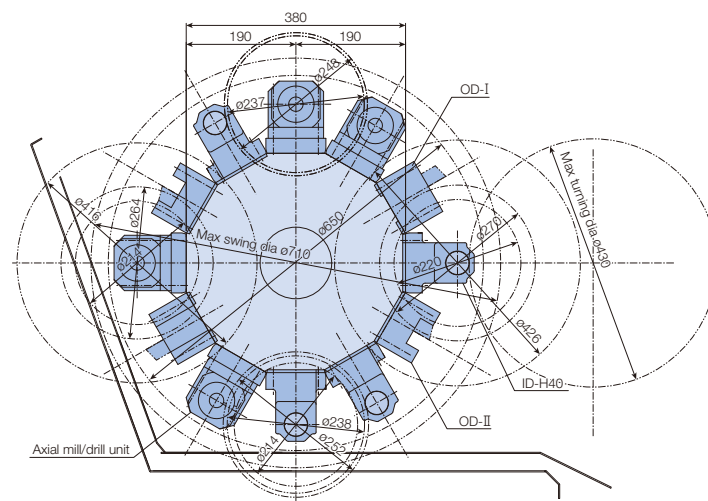


Note: These diagrams are for 750 DBC L/M specs and 720 DBC MYW specs.


LB2000 EX III (L) C x 300
OD-I

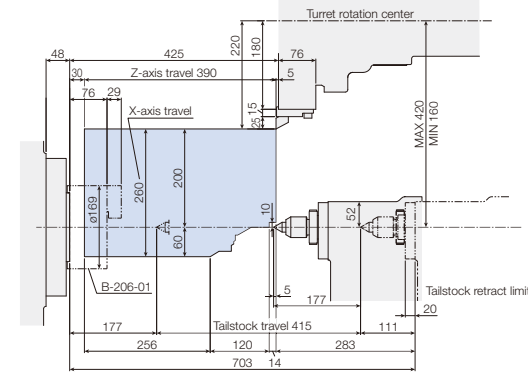

LB2000 EX III (M) C x 300
OD-I

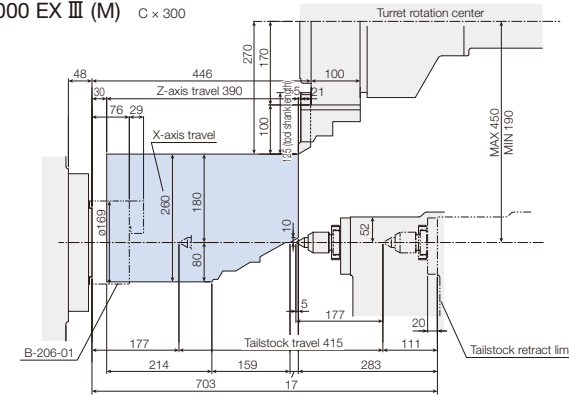


LB2000 EX III (MYW) W x 450
OD-I-S

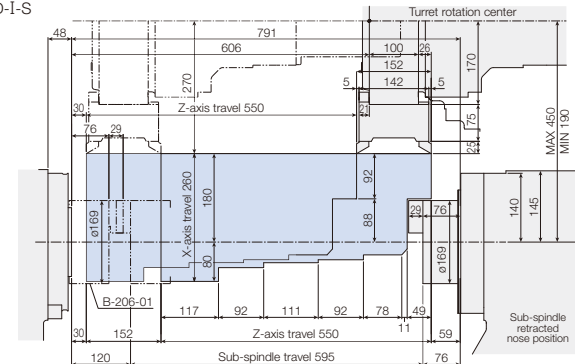


Note: These diagrams show specifications for standard spindles.


ID-H32

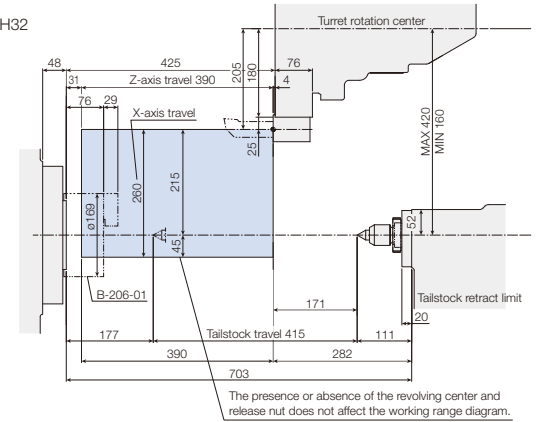


Axial mill/drill unit

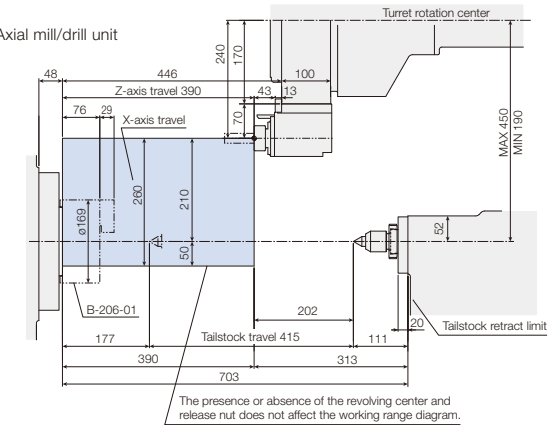


ID-II-S

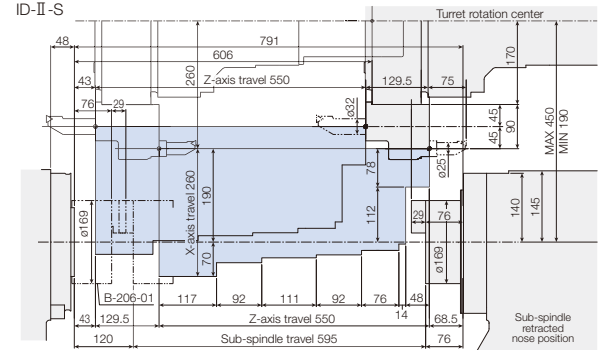


LB3000 EX III (L) C × 250
OD-I

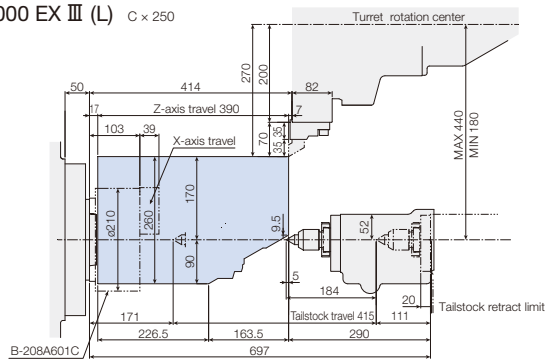






LB3000 EX III (L) C × 500
OD-I

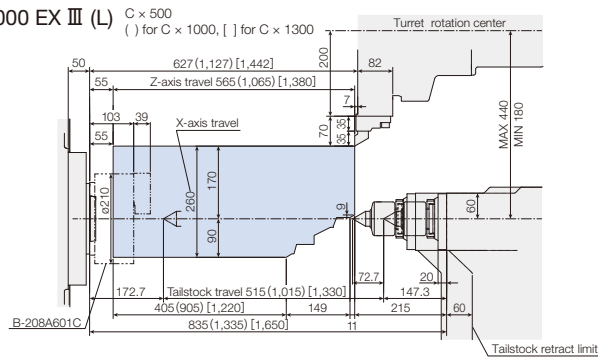

LB3000 EX III (M) C × 250
OD-I


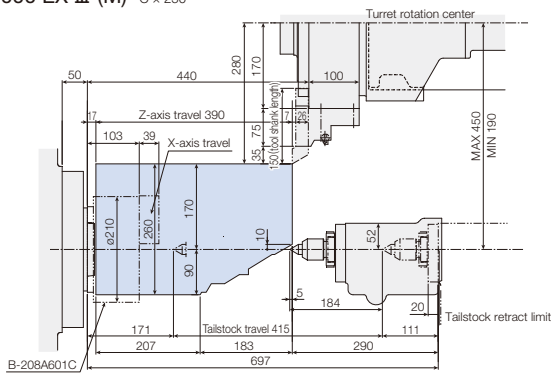


LB3000 EX III (M) C × 500
OD-I

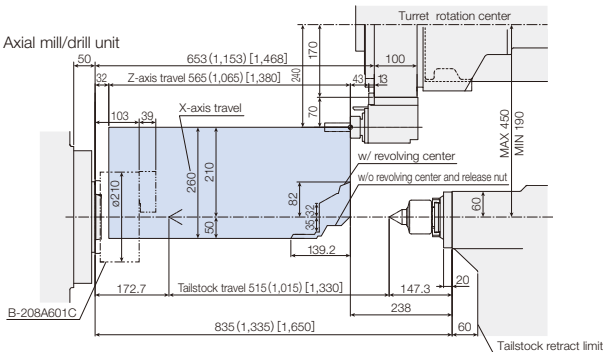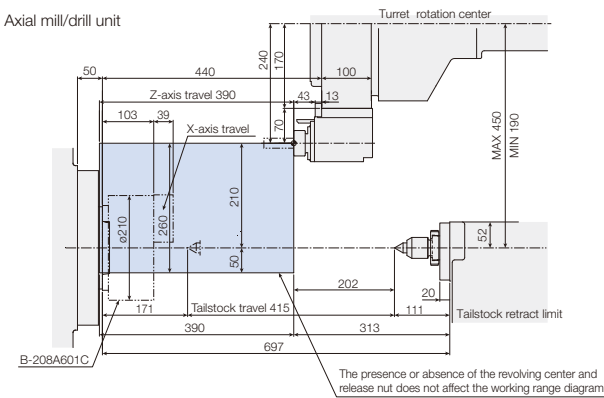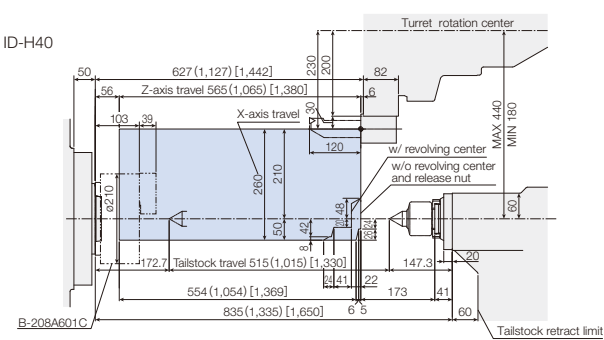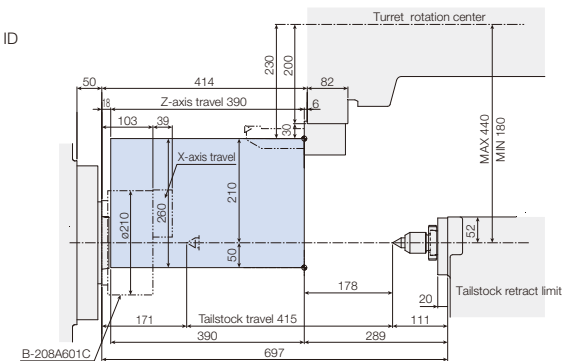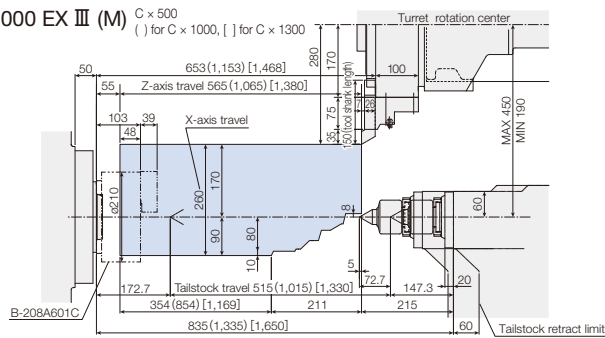


Note: These diagrams show specifications for standard spindles.

LB3000 EX III (MYW) W × 800
OD-I-S

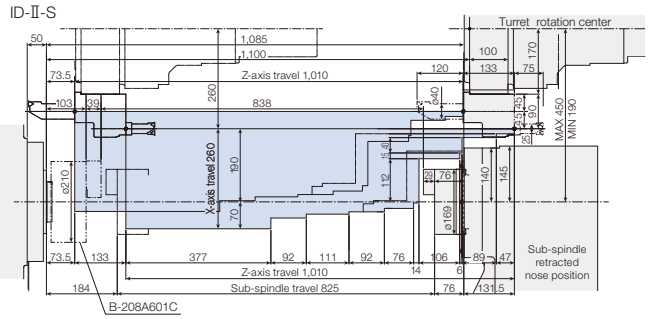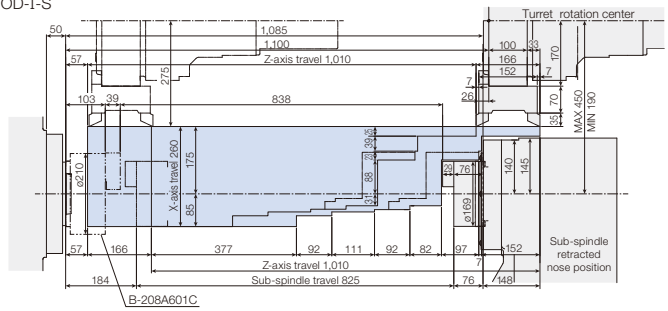


Note: These diagrams show specifications for standard spindles.


LB4000 EX III (L) C × 750
OD-I

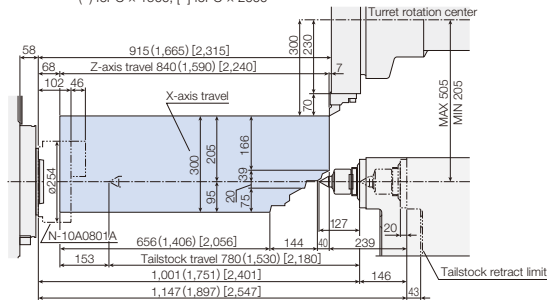


ID-H40

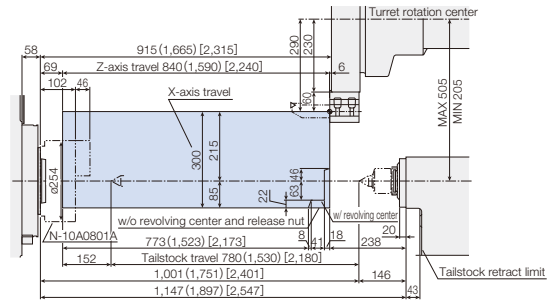


LB4000 EX III (M) C × 750
OD-I

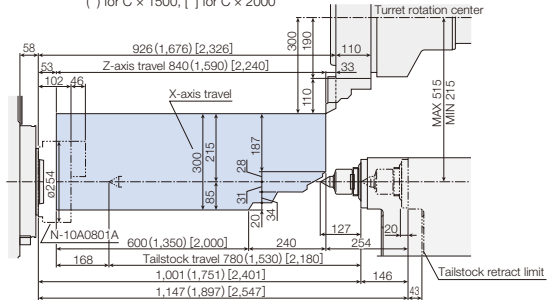


Axial mill/drill unit

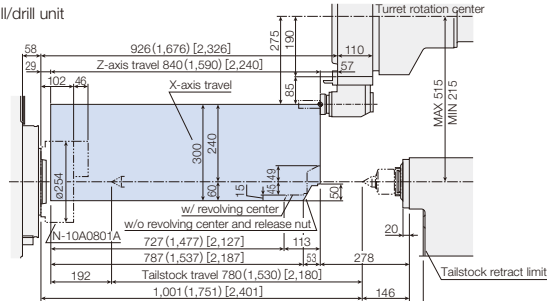

LB4000 EX III (MYW) W × 720
OD-I-S



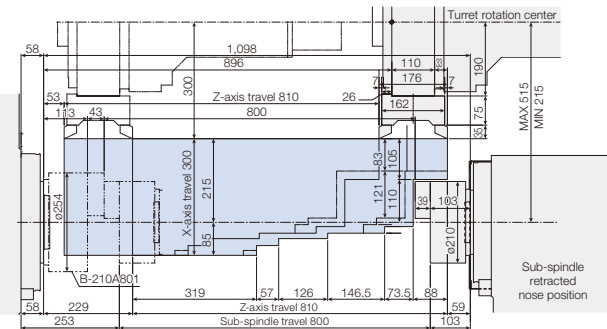


ID-II-S



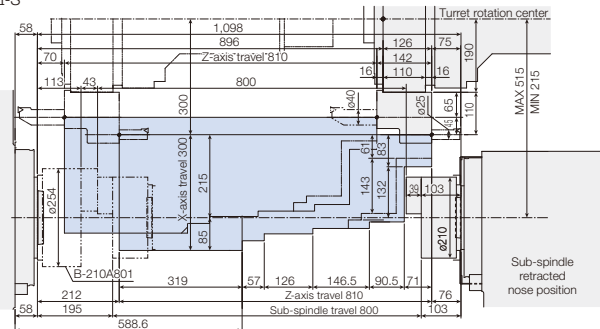


Note: These diagrams show specifications for standard spindles.




LB2000 EX III (L/M) × 300

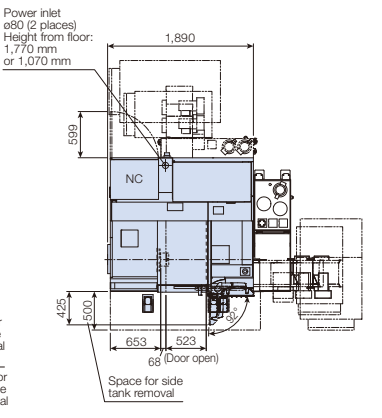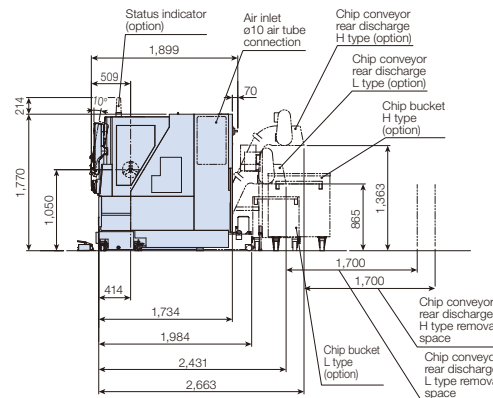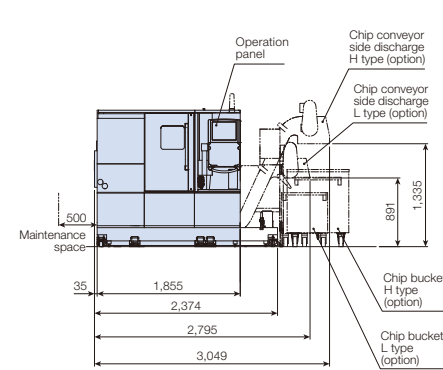




LB2000 EX III (L/M) × 500

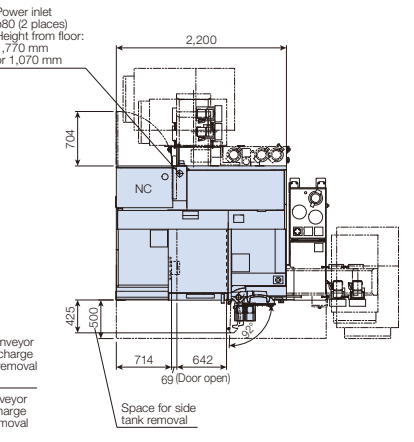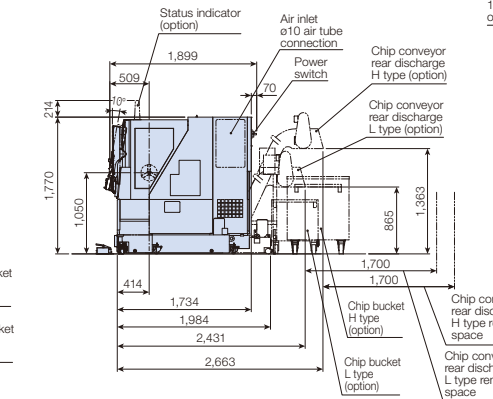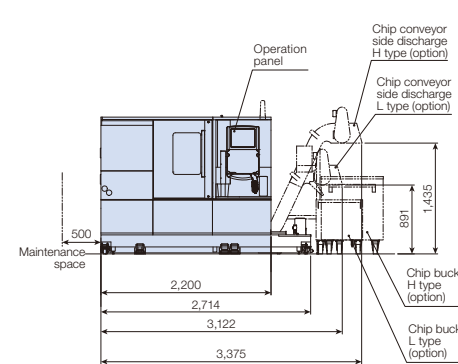


LB2000 EX III (MY) × 250

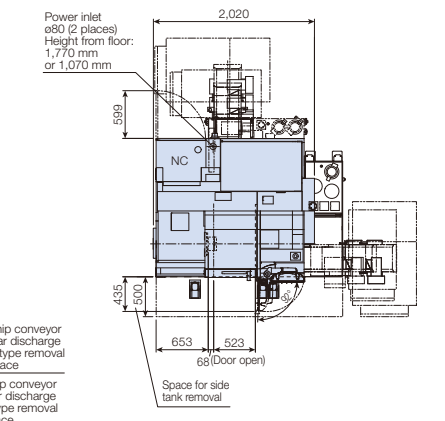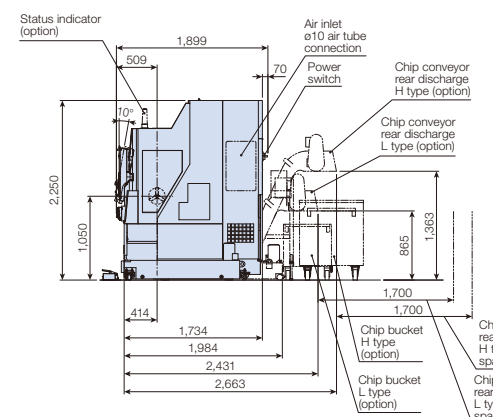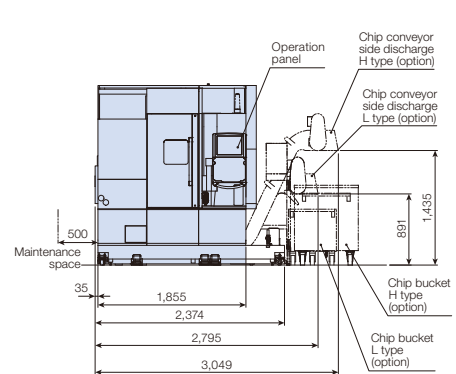


LB2000 EX III (MY) × 450

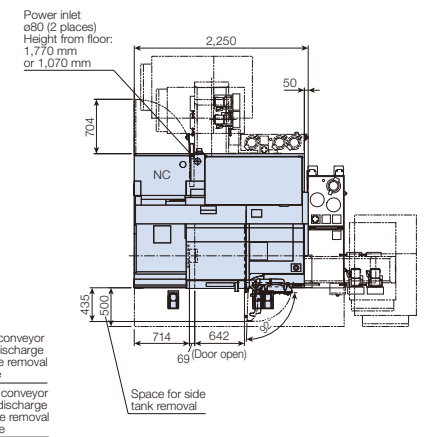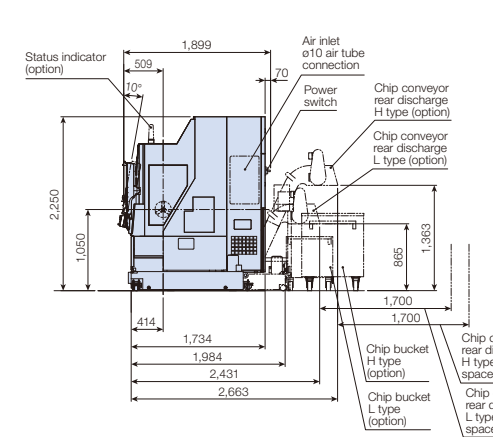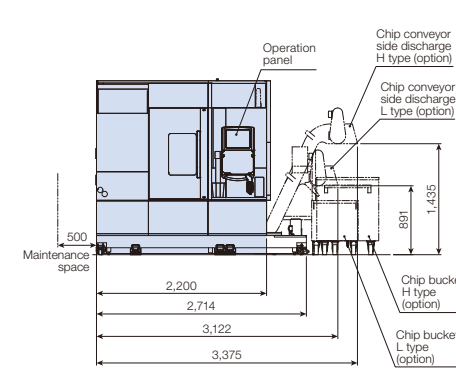


LB2000 EX III (W/MW) × 500

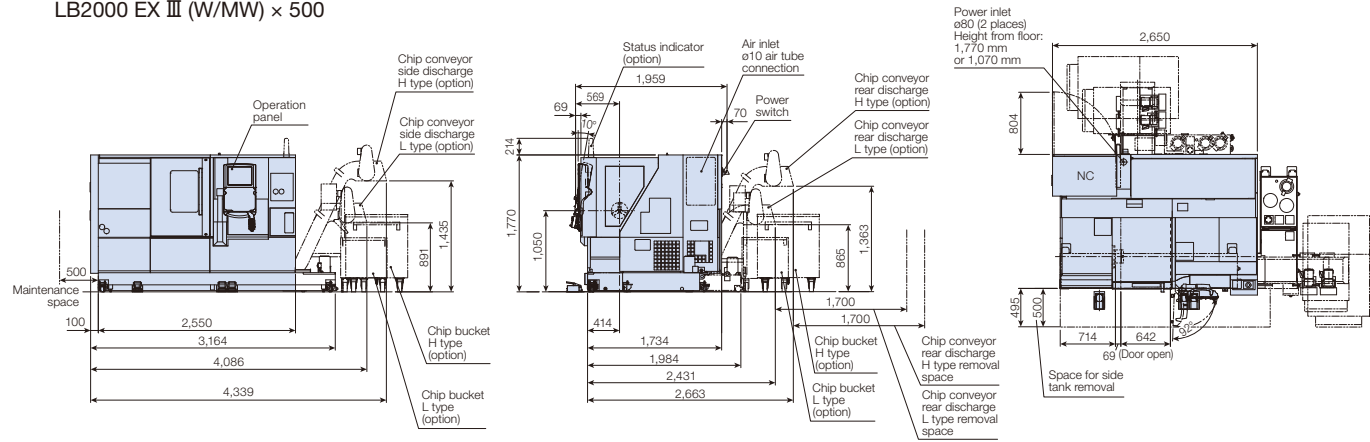


LB2000 EX III (MYW) × 450

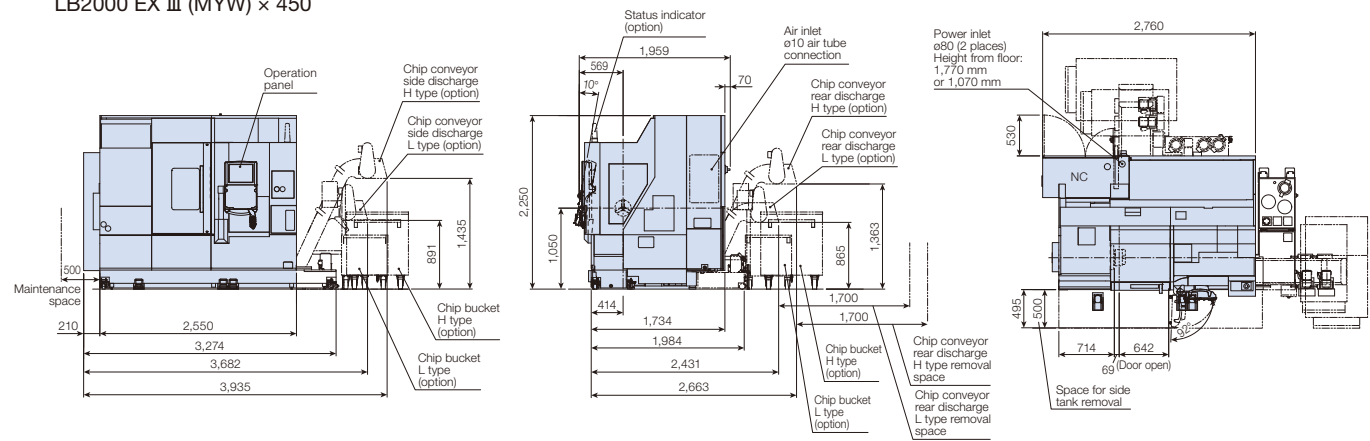


LB3000 EX III (L/M) × 250

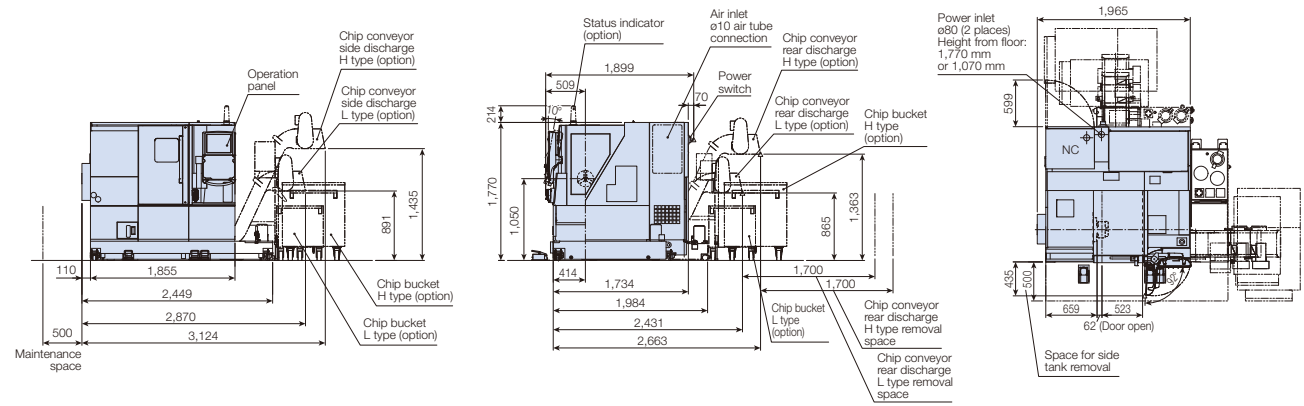


LB3000 EX III (L/M) × 500

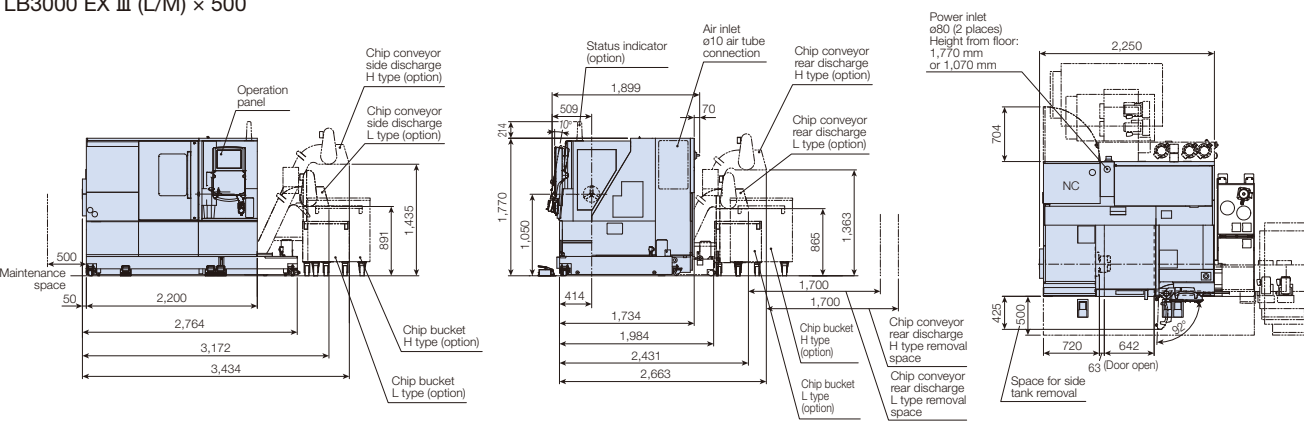


LB3000 EX III (L/M) × 1000

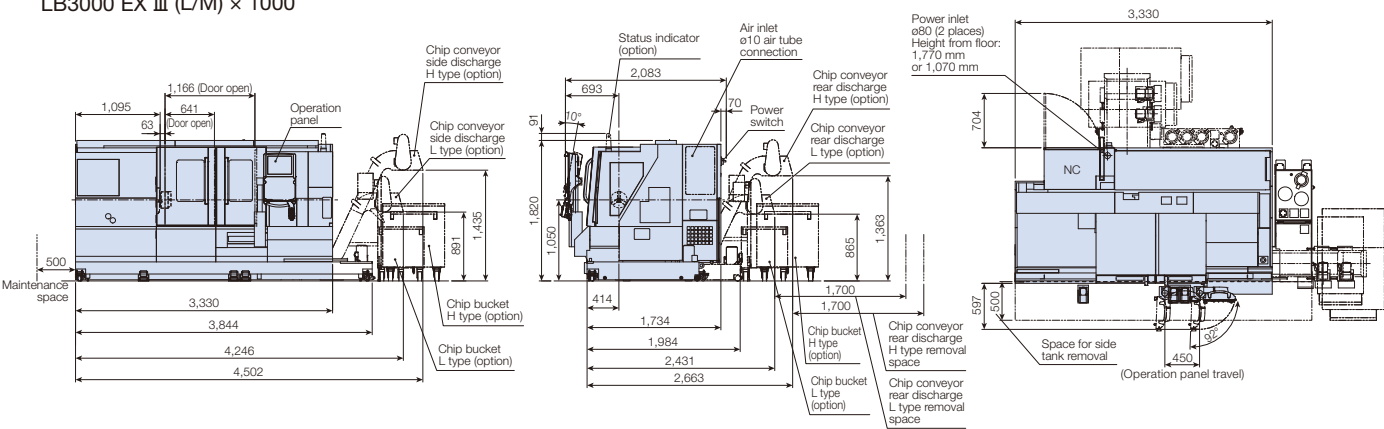


LB3000 EX III (L/M) × 1300

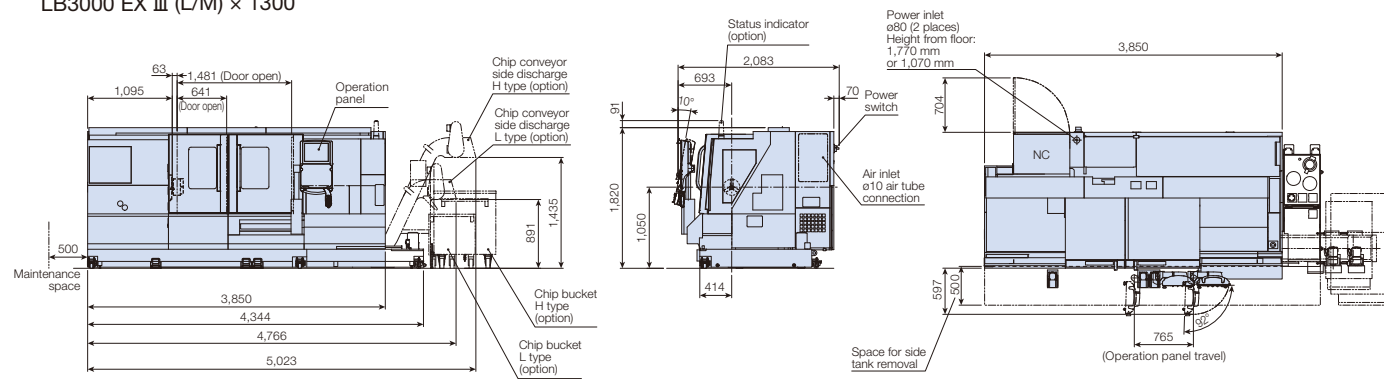


LB3000 EX III (MY) × 200

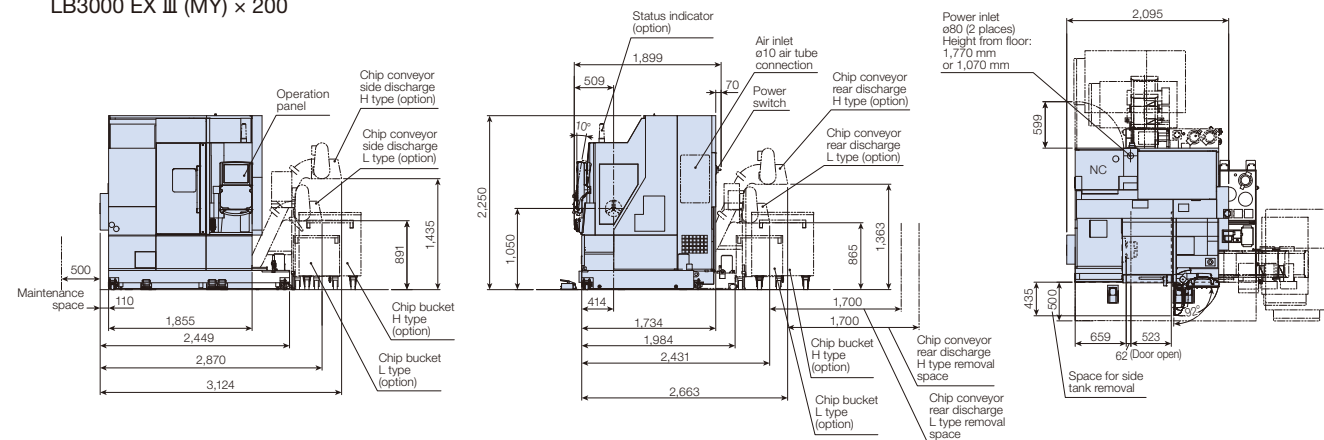


LB3000 EX III (MY) × 450

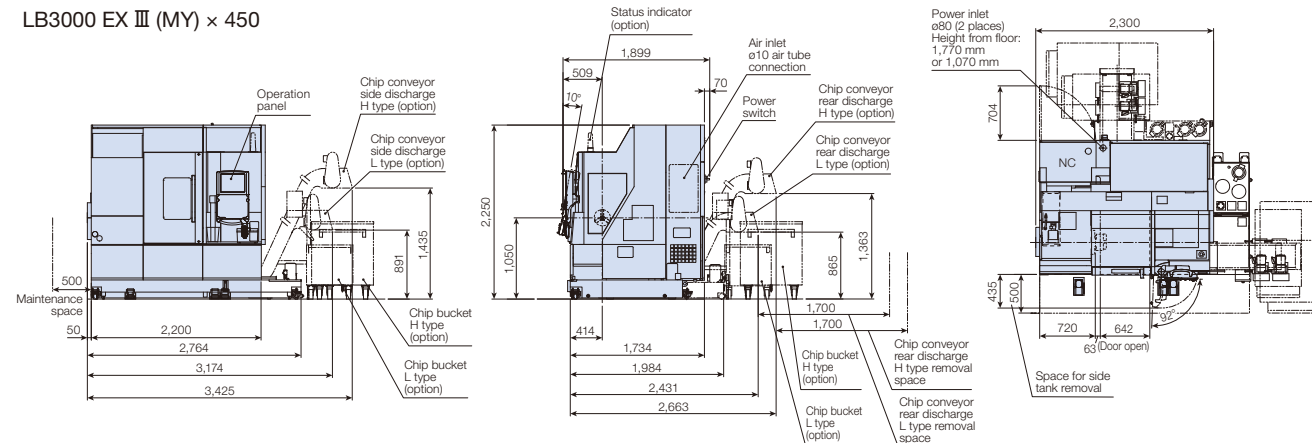


LB3000 EX III (MY) × 950

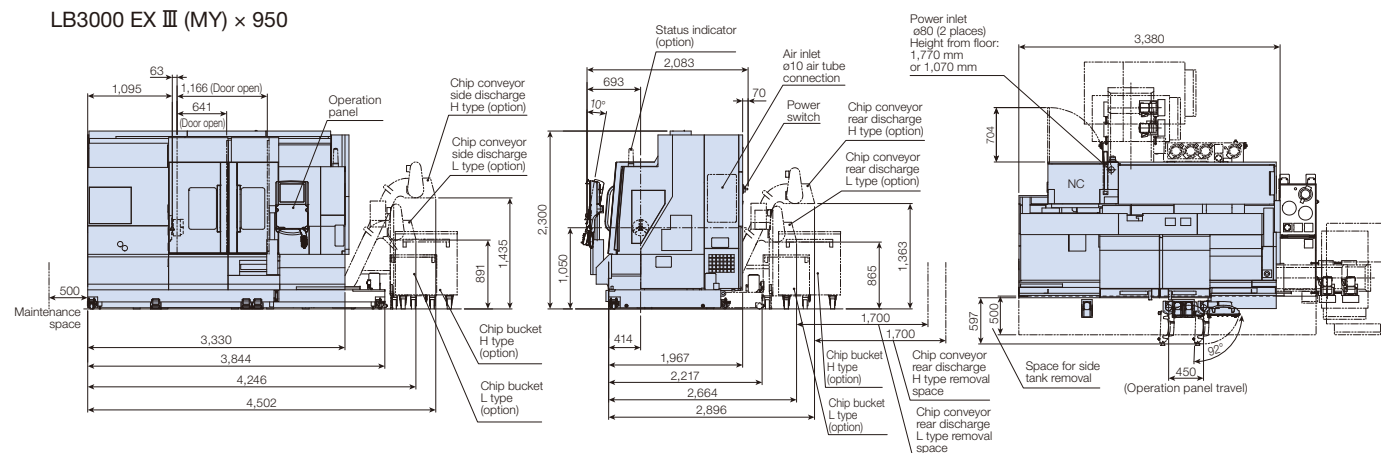


LB3000 EX III (MY) × 1200

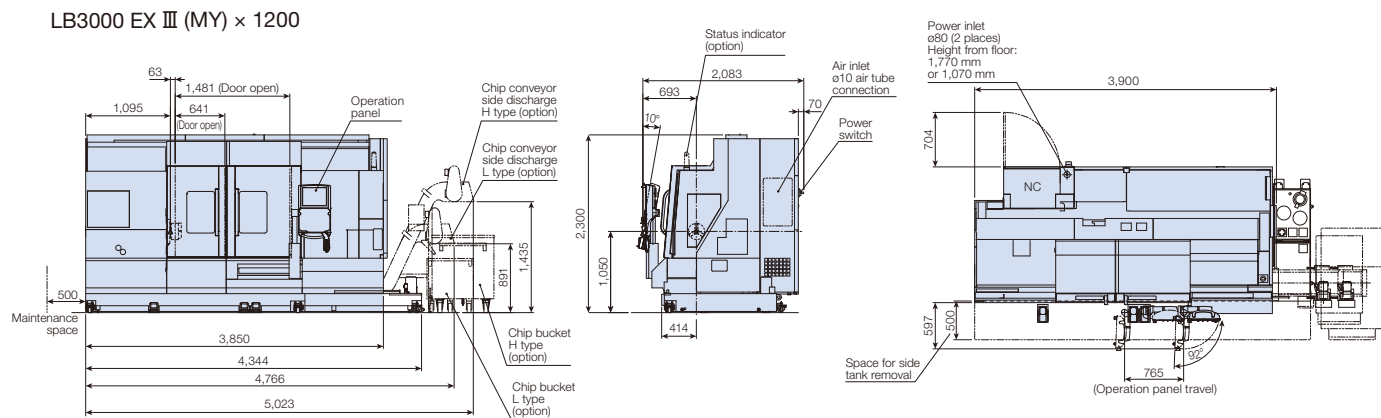


LB3000 EX III (W/MW) × 500

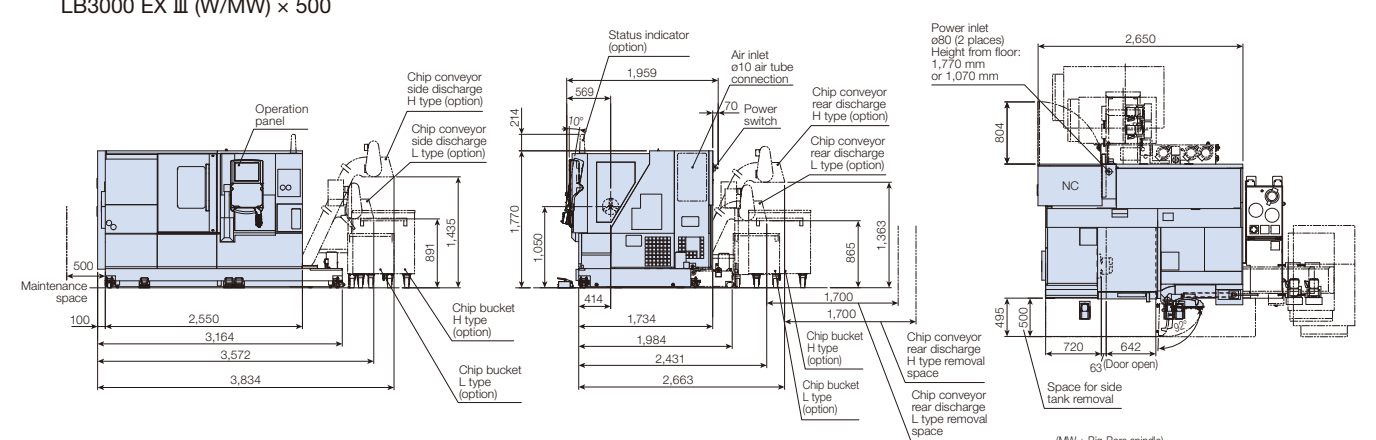


LB3000 EX III (W/MW) × 800

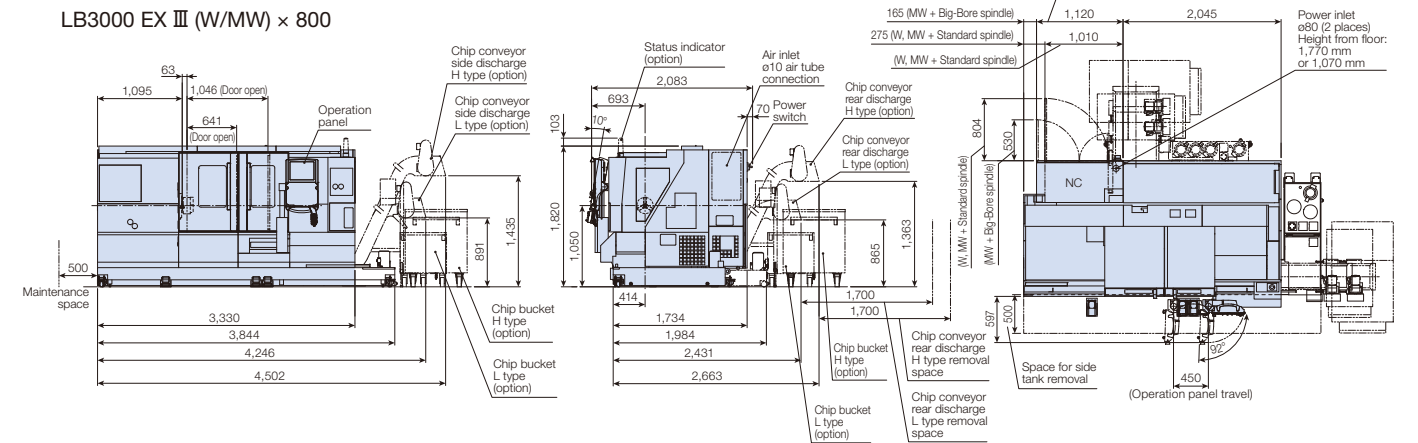


LB3000 EX III (MYW) × 450

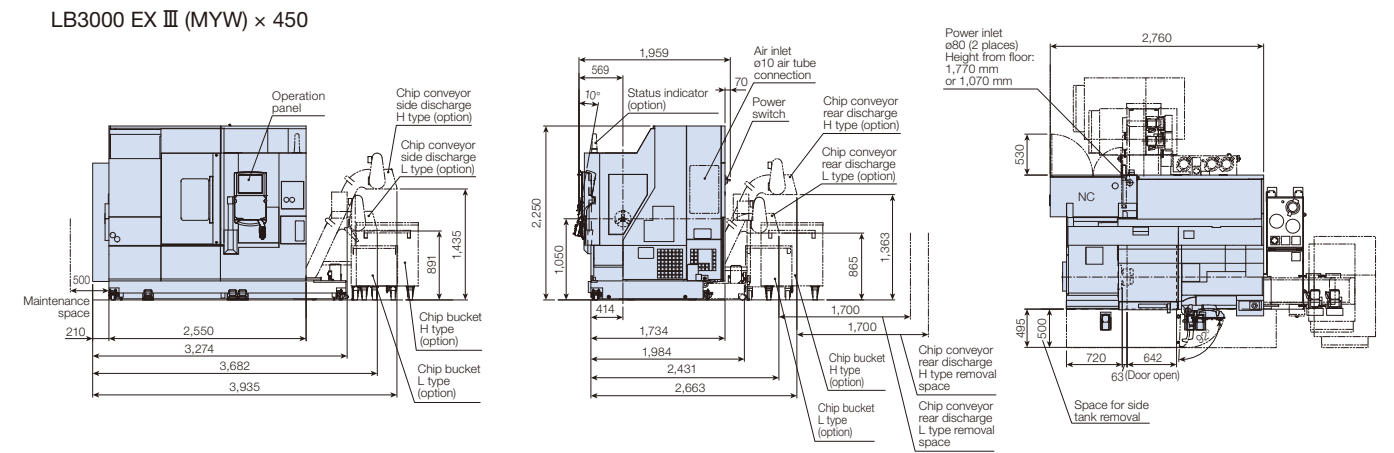


LB3000 EX III (MYW) × 800

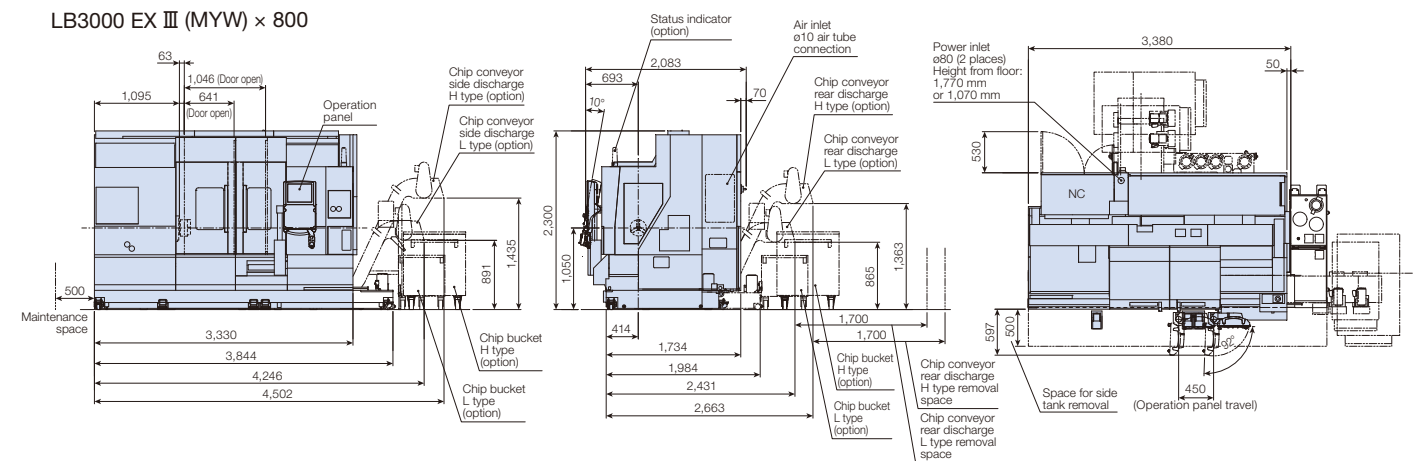


LB4000 EX III (L/M) × 750

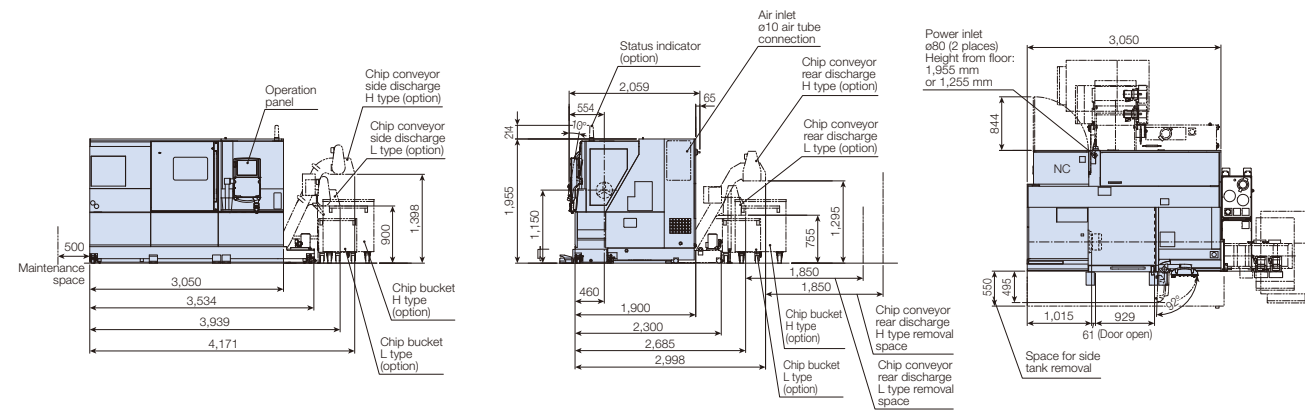


LB4000 EX III (L/M) × 1500

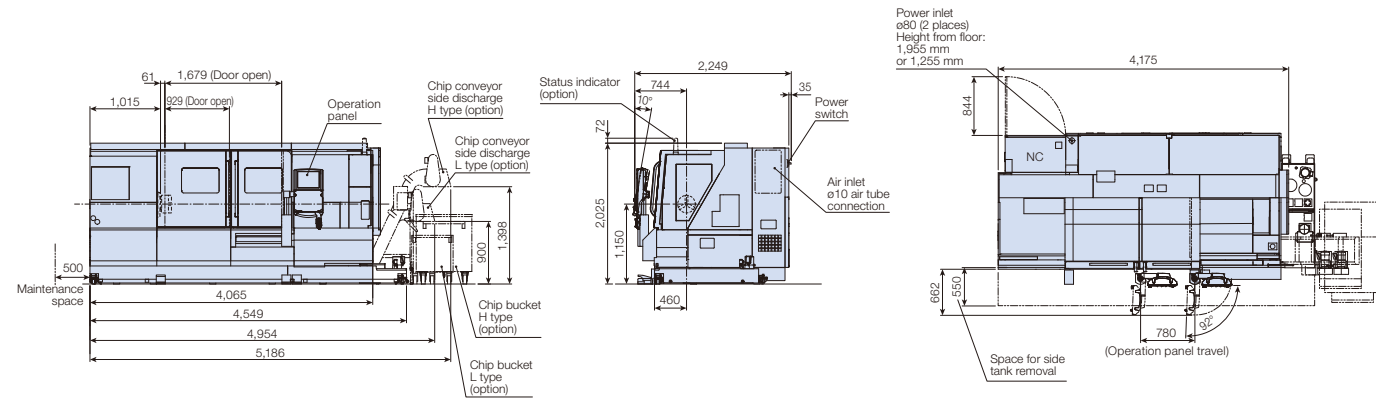


LB4000 EX III (L/M) × 2000

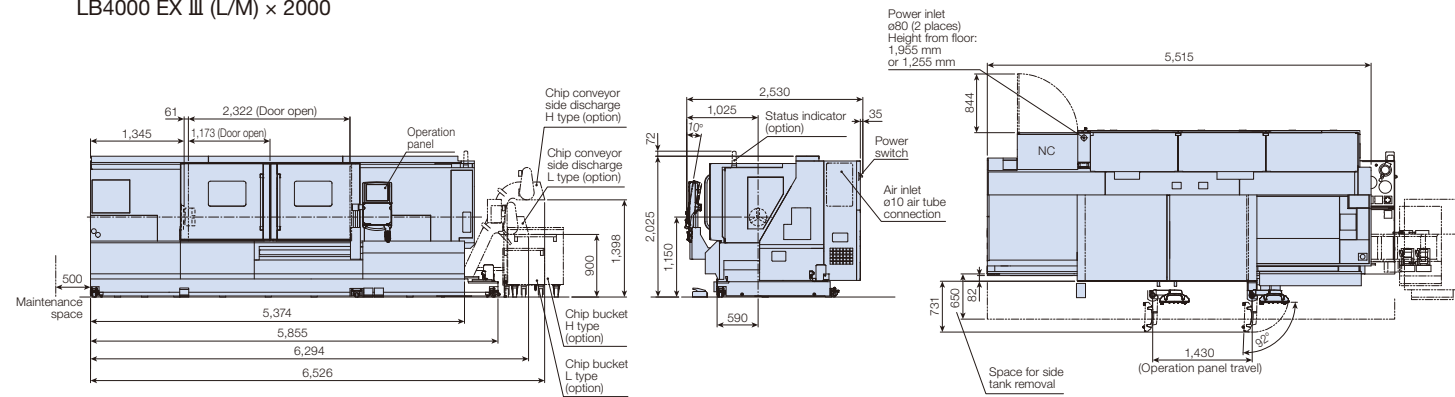


LB4000 EX III (MY) × 750

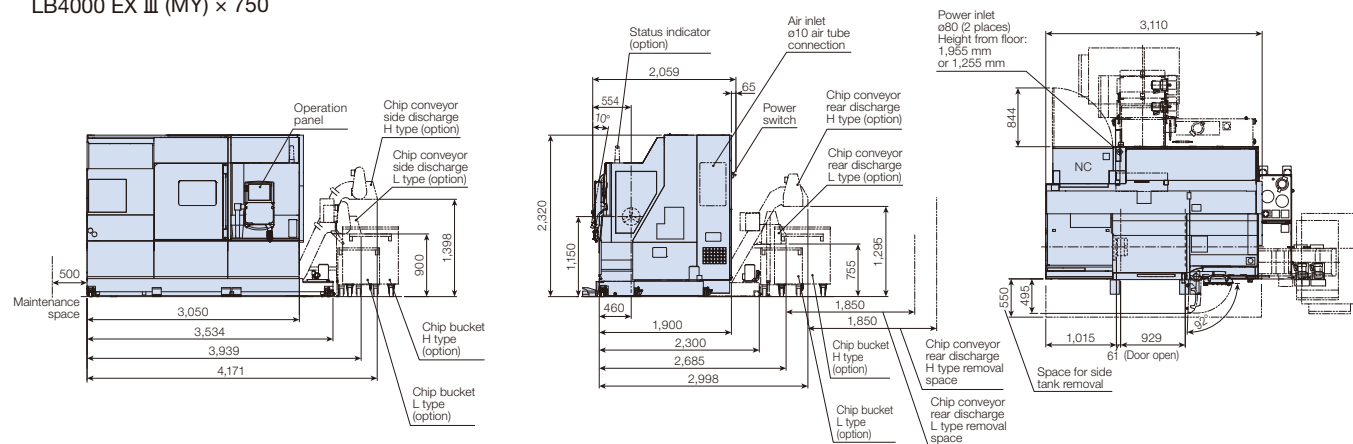


LB4000 EX III (MY) × 1500

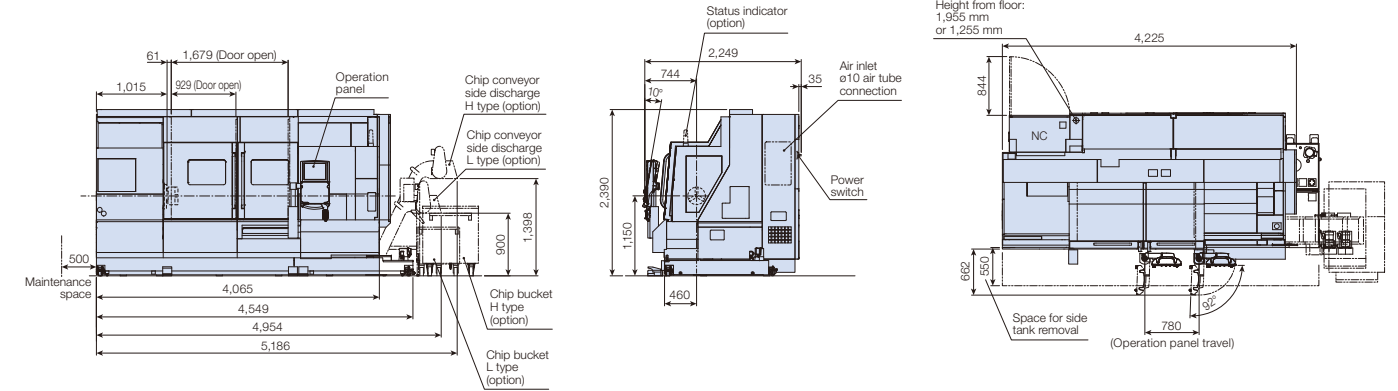


LB4000 EX III (MY) × 2000

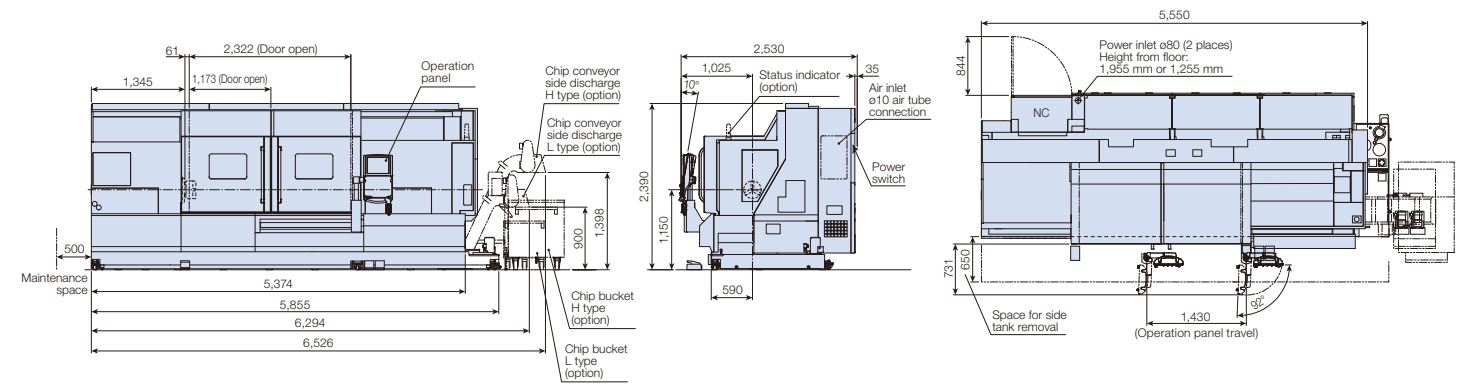

LB4000 EX III (MW) × 720

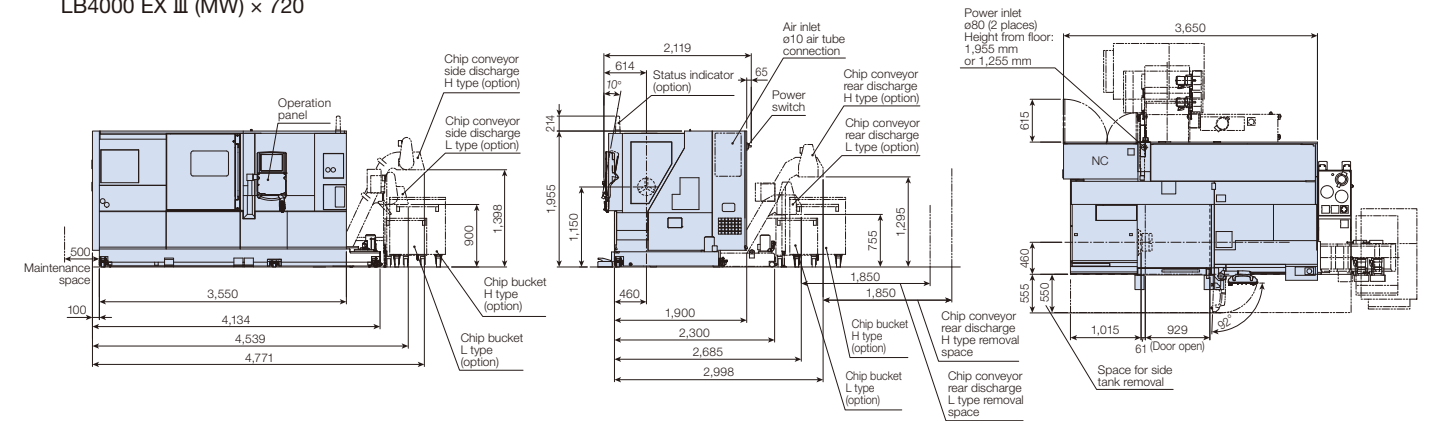

LB4000 EX III (MYW) × 720

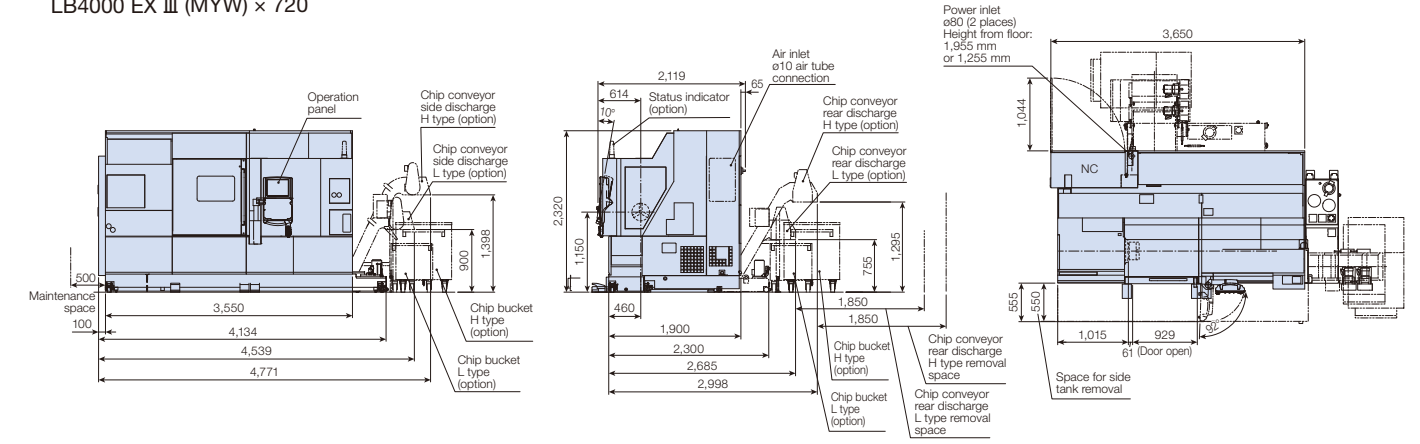

When using Okuma products, always read the safety precautions mentioned in the instruction manual and attached to the product.

●The specifications, illustrations, and descriptions in this brochure vary in different markets and are subject to change without notice.
Pub. No. LB EX3-E-(7.1b)-Non(Jun2026)D

This product is subject to the Japanese government Foreign Exchange and Foreign Trade Control Act with regard to security controlled items; whereby Okuma Corporation should be notified prior to its shipment to another country.



OKUMA Corporation

Oguchi-cho, Niwa-gun,
Aichi 480-0193, Japan
TEL: +81-587-95-7825 FAX: +81-587-95-6074